

Research Article

Repeatability and High-Speed Validation of Supplemental Lead-Extrusion Energy Dissipation Devices

Geoffrey W. Rodgers ¹, J. Geoffrey Chase ¹ and John B. Mander²

¹Department of Mechanical Engineering, University of Canterbury, Private Bag 4800, Christchurch, New Zealand

²Department of Civil Engineering, Texas A&M University, College Station, TX, USA

Correspondence should be addressed to J. Geoffrey Chase; geoff.chase@canterbury.ac.nz

Received 26 September 2018; Revised 20 November 2018; Accepted 13 December 2018; Published 13 January 2019

Academic Editor: Pier Paolo Rossi

Copyright © 2019 Geoffrey W. Rodgers et al. This is an open access article distributed under the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Recent research on supplemental damping enabling low to no damage structures has led to new devices, such as lead-extrusion-based high force-to-volume (HF2V) devices. They provide significant energy dissipation and force capacity in a small volume, enabling a range of novel low to no damage connections and systems. However, despite several research study tests and a limited range of velocity testing, they have never been tested across a realistic velocity range or for robustness to manufacture and design across several devices. These issues are hurdles that limit professional design uptake and add uncertainty and risk to their use in design. To address them, a serious damage-free dissipation device characterise its force capacity and variability due to manufacture (repeatable quasistatic force) and velocity input (peak force to connections). These outcomes are critical to size all the connections and foundations for the resultant demands and ensure robust, effective design. This manuscript presents the quasistatic testing of 96 devices designed for the same quasistatic force capacity, as well as high-speed prototype testing at velocities up to 200 mm/sec. Quasistatic tests show device forces vary with standard deviation, $\sigma < 6.2\%$ of design and average force. Peak input velocities of ~ 200 mm/s produced peak resistive forces of ~ 350 kN and increasingly weak velocity dependence as device input velocity increased, which is an advantage as it limits large demand forces to connecting elements and surrounding structure if larger than expected response velocities occur. Overall, the devices show stable hysteretic performance, with slight force reduction during high-speed testing due to heat build-up and softening of the lead working material. This testing quantified important HF2V device dynamics and robustness for designers and is an important step towards design uptake.

1. Introduction

In recent damage avoidance design and supplemental dissipation device research, high force-to-volume (HF2V) lead-based dampers have been developed that provide large resistive forces while maintaining compact outer dimensions able to fit within typical structural member dimensions [1, 2]. These devices have been implemented into several large-scale experiments, using both jointed-precast concrete and steel beam-to-column rigid connections [3, 4]. These quasistatic experiments involved limited numbers of custom manufactured devices. While the custom made devices delivered repeatable hysteresis curves, it is unknown whether outsourced manufacturing of large numbers for a real structure would yield the same consistency. Equally, it

has not been possible to test the HF2V damping devices in near full-scale structures at representative peak earthquake velocities, so that there is uncertainty around the peak forces that would be obtained in these weakly velocity-dependent devices [1]. These two uncertainties in robustness to manufacture and velocity dependence are significant limitations to design and uptake.

In a bulged-shaft lead-extrusion damper, such as the HF2V device, lead is confined within a cylinder with the bulged-shaft through the center, as shown in Figure 1. As the shaft is forced through the cylinder, the lead is forced to flow through the annular restriction created by the bulge, where this plastic flow absorbs a large amount of energy and provides high resistive forces for a relatively small device. Because the device is weakly velocity dependent and forces

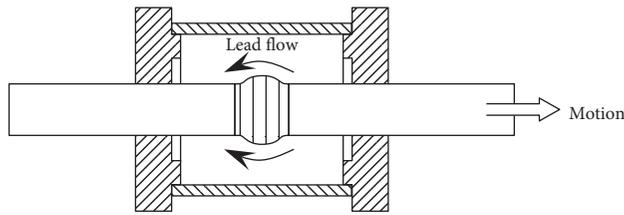


FIGURE 1: HF2V device schematic.

may change over repeated large cycles [1], careful characterisation of the velocity dependence is required.

In particular, high-speed testing at speeds that represent maximum response velocities that might occur in large near-fault events with very high local accelerations is necessary to facilitate uptake of HF2V devices into new and retrofit structures. Although the HF2V dampers are only weakly velocity dependent in prior studies, any device that exhibits velocity dependence should be thoroughly tested before being used in a structure, which could include MR dampers, ER dampers, and a range of other emerging devices [5–12].

In particular, it is critical to know the realistic peak forces that might be encountered to ensure connections between device and structure are designed to avoid failure under these loads. In addition, it is increasingly important to better understand the peak structural base shear forces that might occur as a result of large, velocity-dependent added resistive loads. These peak forces have not been significantly investigated from a design of device-enabled structures perspective, although limited case examples exist [6, 13, 14].

Equally significantly, unplanned variability between device forces, seen in different peak forces in devices under quasistatic testing, could result in significantly different resistive loads across a structure utilising several such devices. These differences could induce higher mode or/and torsional responses not necessarily planned in the initial seismic design. Such variability could, in turn, create greater irregularity in the structure and its response than was planned in the design, leading to greater than planned loads and potential increased risk of damage [15].

Hence, professional design uptake of HF2V devices, which would be used in relatively large numbers of 50–200 in real buildings, requires a greater knowledge of the repeatability of device force in regular manufacture and of the peak forces and force velocity relationship expected at realistic peak response velocities. The recent use of 96 HF2V devices in a new hospital in Christchurch, New Zealand, following the 2010–2011 earthquake sequence [16], provided the opportunity to evaluate and quantify these behaviors. The results should also better inform designers to the potential and limitations of these devices so they can be better integrated into the design and analysis process.

2. Methods

2.1. Devices. A total of 96 HF2V devices were developed for the Kilmore Street Medical Center (now named Forte' Health). The building is an approximately 45 m × 40 m, predominantly steel structure. The suspended steel-

concrete composite floors slabs are supported by eight sets of coupled steel posttensioned braced frames around the perimeter to provide lateral load resistance. This PRESS (Precast or Prefabricated Structural Seismic Systems) design approach uses an “Advanced-Flag Shape” system, where displacement-proportional and velocity-proportional energy dissipation mechanisms are combined in parallel to the recentering contribution from the unbonded posttensioned bars. The overall outcome results in a dissipative and self-centering rocking structure, with details in [16]. The HF2V devices provide passive dissipation and there are 12 per rocking frame, with plan and locations shown schematically in Figure 2.

Two types of HF2V device were designed based on the stroke required for the specific structure location. There were 32 short stroke devices with peak-peak stroke of 120 mm allowed by design and 64 longer stroke devices with 140 mm stroke allowed by design. All devices were designed for peak forces of approximately 350 kN, equating to quasistatic peak forces of approximately 260 kN based on the work in [1]. Thus, while stroke length in testing varies with device based on its use in the final structure, the expected forces are designed to be the same.

All devices were manufactured in bulk by external contractors. The device design ensured, for example, that while cylinder lengths changed depending on stroke, the end-caps were the same and the shaft diameters and shaft bulges were also the same to provide the same quasistatic force capacity by design. Note that shaft diameters of 30 mm of high strength AISI 4340 steel ensure no shaft yielding occurs before a minimum of 600 kN, which is well above expected service loads. All devices were prestressed using the end-caps to a load of 200 kN to ensure consistency.

2.2. Quasistatic Tests. All 96 of the lead-extrusion dampers supplied underwent nondestructive quasistatic batch testing at velocities of approximately 1.5 mm/s using an Avery 1000 kN static testing machine where velocity is manually controlled and may thus vary slightly. This speed is the effective peak velocity this machine produces for these force levels. Displacement was measured independently, and the force was acquired using a load cell. Each HF2V device was quasistatically tested for two unidirectional test cycles comprising ± 60 mm for the short stroke devices and ± 70 mm for the longer stroke devices. The HF2V device was inverted after each input motion to reverse direction. Force and displacement were recorded for each cycle and plotted separately for each device, where these loops are stitched together as one test begins at the end point of the prior test, with opposite sign of force, due to the inversion of the damper. Devices that deviated more than 20% from the expected force levels had more prestress applied to the lead to remove voids or bubbles, thus increasing capacity [1]. However, only the first test run results are shown in this study so variability due to manufacture can be assessed.

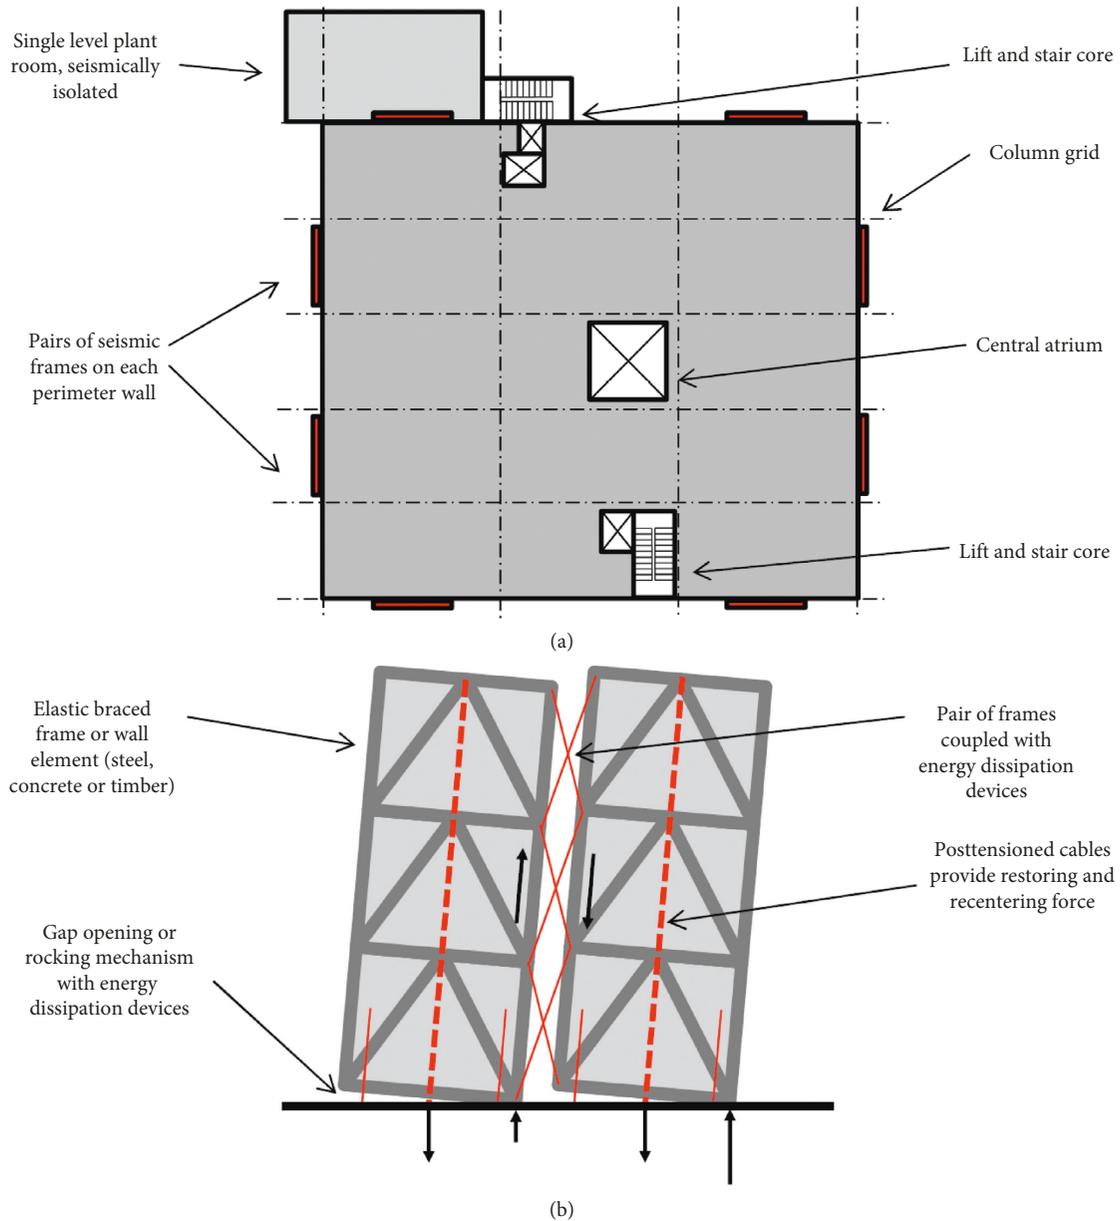


FIGURE 2: (a) Plan view of Kilmore Street Medical Center showing 8 pairs of rocking frames. (b) Each pair of frames has 12 HF2V devices mounted in pairs, with 8 at 4 points at the bottom of the frames and 4 at the 2nd and 3rd levels, where the diagonal lines at each level indicate added buckling-restrained braces [16].

2.3. High-Speed Tests. To undertake high-speed testing of HF2V devices, a maximum likely response velocity for this structure was necessary. The most likely applications for HF2V devices are within rocking connections or rocking walls, or within structural bracing. While the maximum velocity imparted into a damping device is dependent on a number of factors, such as the eccentricity from a rocking edge, structural natural period, and the maximum ground motion velocity, most applications would dictate a peak velocity for a maximum considered event (MCE) on the order of 100–300 mm/s, which in this case was specified by the designer based on nonlinear simulation yielding response velocities across the devices as located. It is noted that for different structures, such as steel moment frame

connections in [4] and device locations, these velocities could be much higher. This peak velocity is well beyond the maximum input velocity previously tested in structural scale studies [3, 4]. Hence, the test machines must be able to provide up to 400 kN of force at up to 200 mm/sec speed.

Many test machines in New Zealand are either low force (up to 100 kN) and high velocity (400 mm/s or higher) or high force (10 MN or higher) with very limited velocity (up to 10–15 mm/s). Very few local systems can provide capacity in the required intermediate range of force and velocity. In addition, many machines can only provide a high velocity for only one-to-two cycles due to limited accumulator capacity. Therefore, two considerations were made: (1) the peak, one-shot velocity that could be obtained, which is

typically limited by the system's accumulators and (2) the maximum sustained repeated cyclic velocity, which is limited by the rate the pump can supply high-pressure fluid.

Given the 400 kN requirement, no hydraulic test system could be located that allowed the devices to be tested in a direct-drive sense. The closest, at Quest Integrity (Gracefield, Lower Hutt, New Zealand), was an Instron 1344, shown in Figure 3(a), capable of 250 kN peak force and cross-head velocities up to 400 mm/s at near full load, which is close to the requirements. A 2:1 lever-setup, shown in Figure 3(b), was designed to reduce the velocity and increase the force capacity, allowing up to 500 kN and 200 mm/s to be imparted into the HF2V damping device, thus meeting the required test characteristics.

Data acquisition was provided by a rotational encoder and string-line, and force was provided both directly from the cross-head and through a 500 kN universal load cell. Force and displacement was recorded directly off the device due to the slight variation in lever-arm length through the range of motion. This variation is due to elastic flexibility of the lever-arm system and friction within the pin joints reducing force transferred from the machine. The load cell force is thus the true input force.

HF2V devices were subjected to fully reversed cycles at near full-stroke (± 45 mm amplitude) at device velocities from 2.5 mm/s through to 200 mm/s, corresponding to 5–400 mm/s at the Instron cross-head. For velocities up to 25 mm/s, 3 or more fully reversed cycles could be sustained without loss of hydraulic pressure and consequently loss of machine position control. At higher velocities (50, 100, and 200 mm/s into the device), only part of the input profile could be sustained before the loss of position control. Multiple devices of the same design were tested to indicate repeatability between devices.

Finally, to test the influence of heat build-up and softening of the lead, 10 fully reversed cycles at near-full ± 60 mm stroke were undertaken at the maximum sustainable velocity of 10 mm/s. Beyond this velocity, only a maximum of 3 cycles could be achieved before a loss of hydraulic pressure. Hence, this specific test is designed to quantify worst case device force degradation over several large cycles.

3. Results and Discussion

3.1. Quasistatic Tests. Figure 4 presents the quasistatic test results from the shorter stroke devices ($N = 32$, tests 1–32) and the longer stroke devices ($N = 64$, tests 33–96). There is some variability between devices of each type, as seen in the graphs, but force levels are consistent with those seen in prior prototype devices. In particular, short stroke devices have mean (\pm standard deviation) peak force of 261.5 (± 12.9) kN, and long stroke devices provide 273.2 (± 17.3) kN. These standard deviations relate to $\pm 4.9\%$ and $\pm 6.2\%$ of average peak force, and directly quantify the variability due to manufacture in bulk.

The CDFs in Figure 4 and associated statistics also show the measure of required overstrength due to manufacturing variability. In particular, 95th percentile ($+2\sigma$) device forces are 278 kN for the shorter devices and 293 kN for the longer

devices. Given a design force of 250 kN, compared to an average of 269.2 kN over all devices, the overstrength bias for the 95th percentile is 6.9% for short devices and 12.7% for long devices. Equally, the percentage below a minimum specification of 260 kN minus 1σ or 6.2% of 260 kN (244 kN) is 1 device or 3% for the short devices and 4 devices or 6% for the long devices. These few devices could be easily prestressed again, as was done at minimal cost for outliers, to ensure they met specification. Overall, the distributions are relatively tight to specification and the average values obtained. Very few would require reworking. Finally, any similar specification system to ensure a tighter distribution of manufactured peak device forces, including reworking, could be employed.

Figure 4(e) presents the overall distribution of strength measured in all 96 tests, regardless of stroke length. It should be noted that the design strength of all devices was set at 250 kN. Based on the measured capacities, there is, on average, a strength bias of $\sim 8\%$ above the design strength with the 95th percentile of ~ 300 kN being 20% above design strength. However, more importantly, for capacity design purposes, it is necessary to design fixtures and other structural members by increasing the strength by an overstrength factor from the weakest link in the resistance chain. In this case, the HF2V devices are intended to be the “weak” or sacrificial link allowed to give way. Results in from the distribution in Figure 4(e) suggest an overstrength factor of $\phi_0 = 1.2$ above the design (specified) device strength would be in order in accordance with customary capacity design principles. This factor and approach gives the designer confidence the devices will not lead to yielding or damage in other parts of the structural system.

Recall that the devices were tested unidirectionally and thus each loop is stitched together from 2 quasistatic tests. The small directional variability seen in the results, where the negative direction is smaller than peak force in the positive direction, is due to initial prestress applied by the test in the positive direction that must be first overcome when returning the device a full stroke in the opposing direction. Hence, this directionality is expected and could be readily ameliorated by prestressing the devices using both end-caps.

Finally, each test shows the initial peak force as device motion begins and the device changes from a static resisting force to a kinetic resistive force as the lead begins to flow and the shaft moves. As a result, the peak force is early in the cycle, and forces drop slightly. This behavior is typical of these devices when tested over longer strokes than those presented in the initial works, which had far shorter strokes considering their location inside beam column connections [1–4].

The use of independent device testing could be assumed to imply that it may not perform this way in service, or that the required reversing of the devices in quasistatic testing could increase the variability of the results. However, prior works have shown that both assumptions are not accurate (e.g., [3, 4, 17]). In particular, they show a solid material device has no gravity dependence and this simple test captures device behavior consistently and well. Equally,

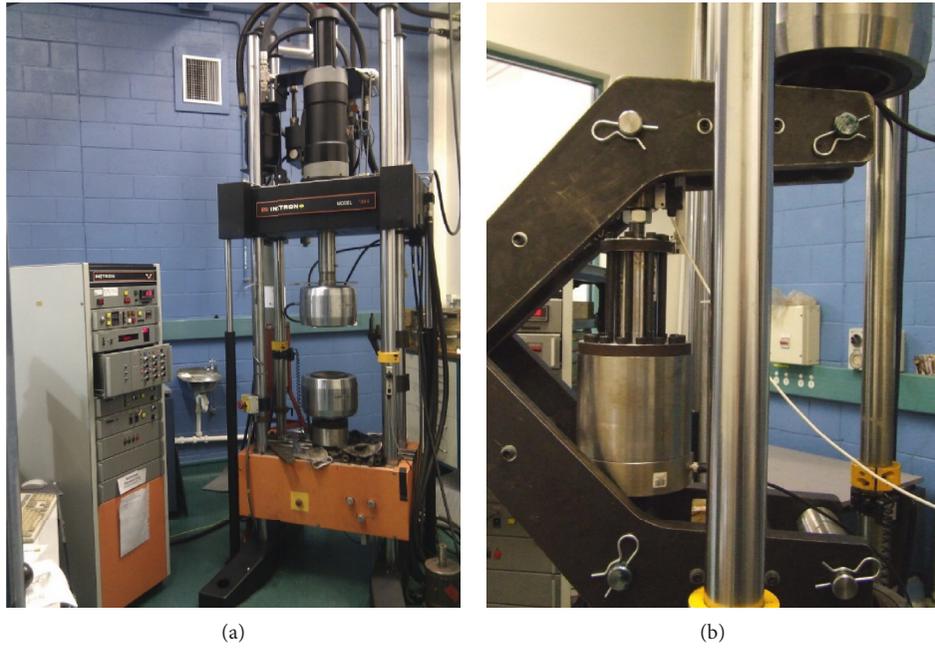


FIGURE 3: Details of the device test configuration. (a) Instron 1344 at Quest Integrity Ltd, Gracefield. (b) Lever system to increase force capacity.

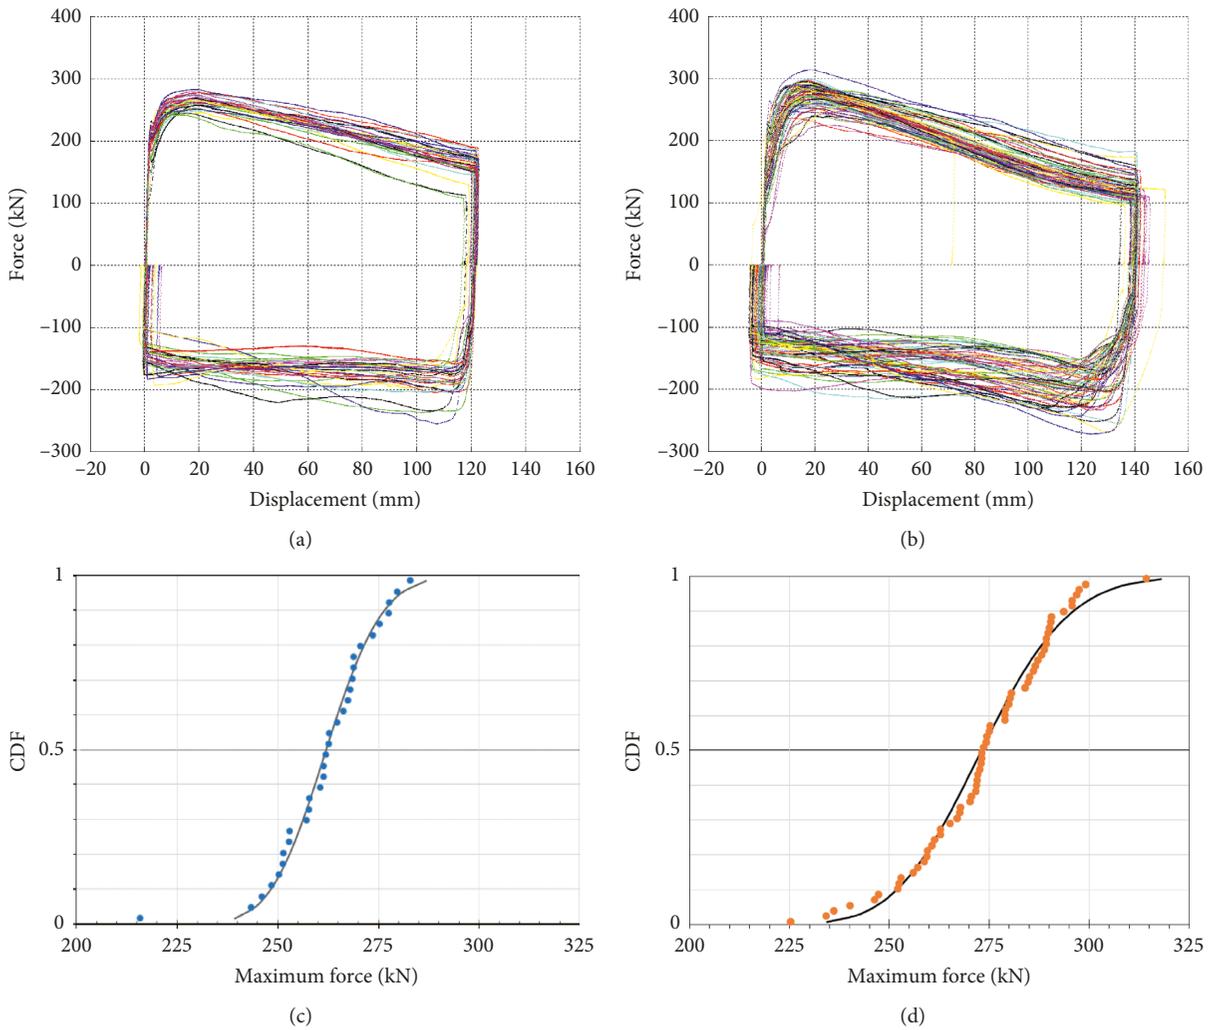


FIGURE 4: Continued.

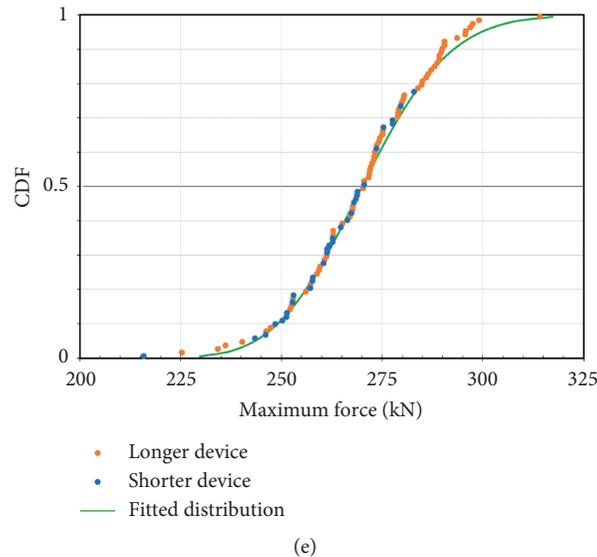


FIGURE 4: Quasistatic results for the 96 HF2V devices showing statistical distribution of strength. (a) Short stroke devices (tests 1–32). (b) Long stroke devices (tests 33–96). (c) Strength distribution: 32 short stroke devices. (d) Strength distribution: 64 long stroke devices. (e) Strength distribution for all 96 devices. Median strength = 270 kN; dispersion of strength (COV) = 7.2%.

these references show that when used in large-scale systems, the device behavior almost exactly matches results seen in separate testing like that done here. Thus, there is little reason to assume different performance in situ or as a result of the quasistatic test method.

The overall results show remarkable consistency for a low-cost and simply manufactured device. Each device costs approximately NZ\$1000 (US\$700) and was machined using several local machinists. The assembly, including lead pour and prestress, was done at a central location. Thus, the device consistency of $\pm 6.2\%$ or less from the average (design) device force indicates these devices are very robust to manufacture and assembly, largely due to their relatively simple manufacturing process.

3.2. High-Speed Tests. Figures 5–8 present device results for different input velocities. Force, displacement, and velocity values represent those within the devices and not those of the machine cross-head. Figures 5 and 6 show input displacement is very similar between tests, and the machine cross-head tracks the command input well. However, in Figures 7 and 8, it is evident that once the hydraulic pressure in the accumulators is lost, displacement tracking is very poor and inconsistent, as expected. This difference is simply due to the limitations in the hydraulics used to drive the test machine.


Overall, Figures 5–8 clearly show the HF2V devices exhibit only very weak velocity dependence, as expected [1]. This observation is attributed to the fact that the overall resistive force is made up of a combination of frictional resistance and extrusion resistance. Frictional resistance is generally considered to be velocity independent, and extrusion is only weakly dependent on velocity.

In addition, it is apparent in Figures 5–8 the friction component may reduce with higher input velocities, as the transition from static to kinetic friction is more rapid. This


behavior is seen where the force response reaches a peak at initial motion inputs and then decreases for the significant majority of the motion where velocity is a maximum. Therefore, this reduction at higher velocity balances out the increased extrusion force, to provide a device whose resistive force is increasingly independent of the input velocity as velocity rises. This outcome can be considered advantageous from a structural design perspective, as high response velocities will not impart concomitantly increasingly larger damping forces into the structure and thus will not require stronger reaction bracing at the device connections nor deliver larger base shear loads to the foundation.

Hence, compared to a viscous damper that can be much more strongly velocity dependent [18–23], these devices have an increasingly smaller increase in force as velocity rises, all else equal. As a result, unlike a linear viscous damper and other similar devices, the peak forces that would be expected from peak structural velocities are effectively limited. The exception would be those viscous dampers with non-Newtonian fluids with significantly nonlinear behavior that also limits peak forces as velocity increases [19, 22–24]. This limiting implies easier design of connections, device components like the shaft, and of the overall structure considering total reaction forces and base shear, as the demands on all these elements are thus limited.

Figure 9 presents results from 2 identical devices subjected to 10 fully reversed cycles at the maximum sustainable input velocity of 10 mm/s device velocity. There is an evident reduction in resistive force due to the heating effects and softening of the lead as the cycles proceed. The devices, posttest, were quite hot to the touch, although temperature was not measured. Overall, peak forces drop from approximately 300 kN on the first cycle, down to about 180 kN ($\sim 40\%$) over the 10 cycles, which is a potentially a significant reduction.

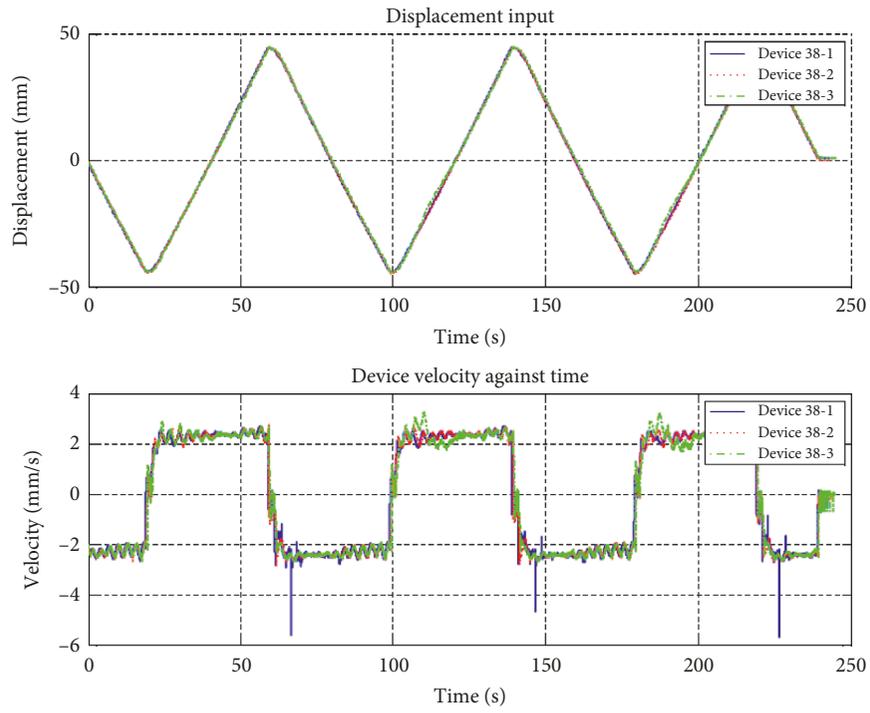

(a)

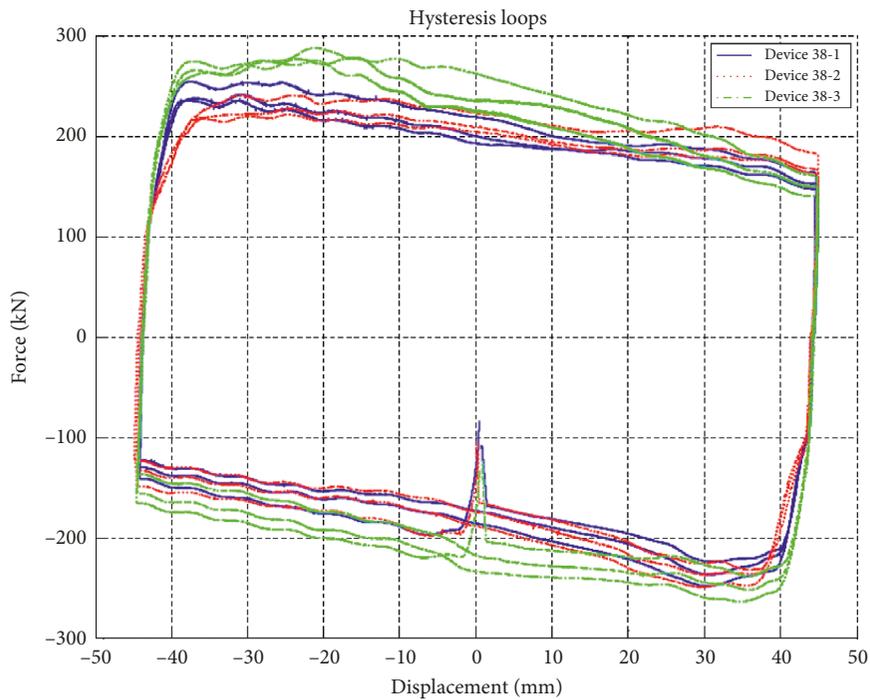


(b)


FIGURE 5: Representative results showing 3 fully reversed cycles at 2.5 mm/s device velocity command with inputs of displacement and velocity (a) and resulting hysteresis loops (b).

While the results imply a maximum loss of up to 40% in resistive force, it is important to note that it is a temporary effect. Once the HF2V devices were allowed to cool after testing, resistive forces returned to their original values within several minutes. Thus, full resistive forces would be

available for a subsequent event, even if it occurred 40–45 minutes later as was the case on February 23, 2011, and subsequent large events, in Christchurch, but is more rarely the case elsewhere.

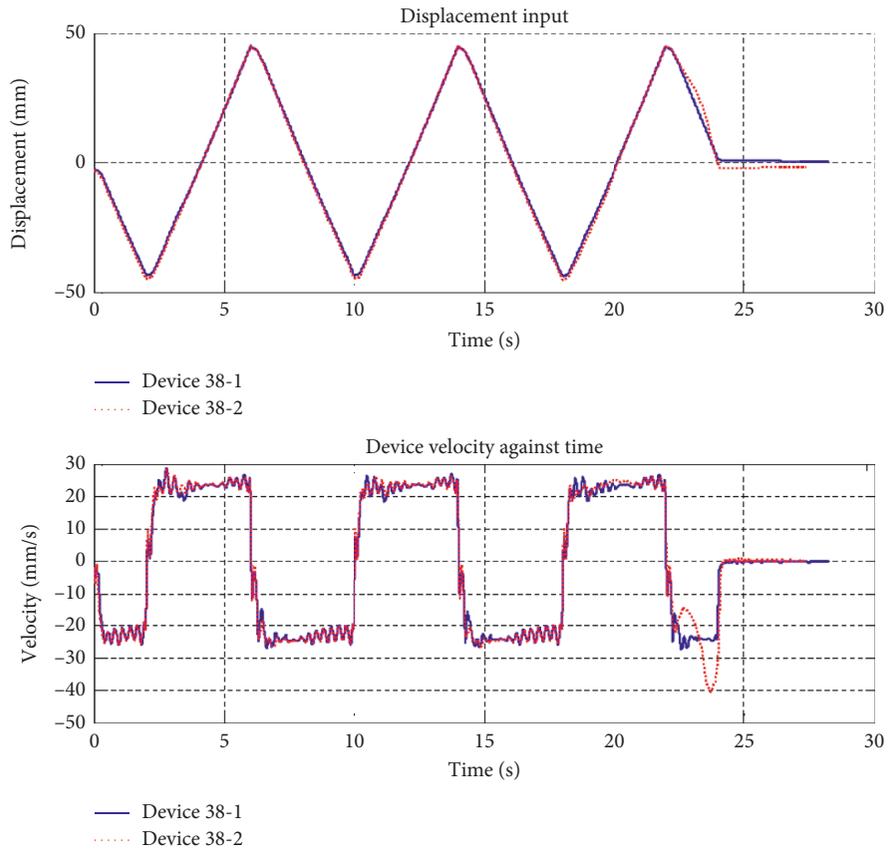


(a)

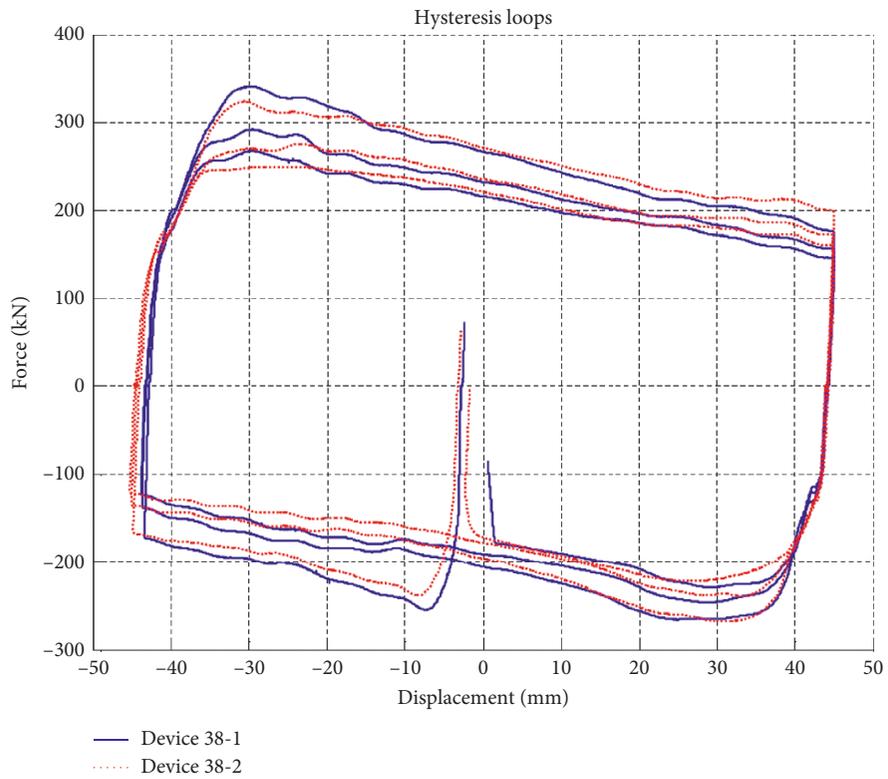


(b)

FIGURE 6: Representative results showing 3 fully reversed cycles at 25.0 mm/s device velocity command with inputs of displacement and velocity (a) and resulting hysteresis loops (b).

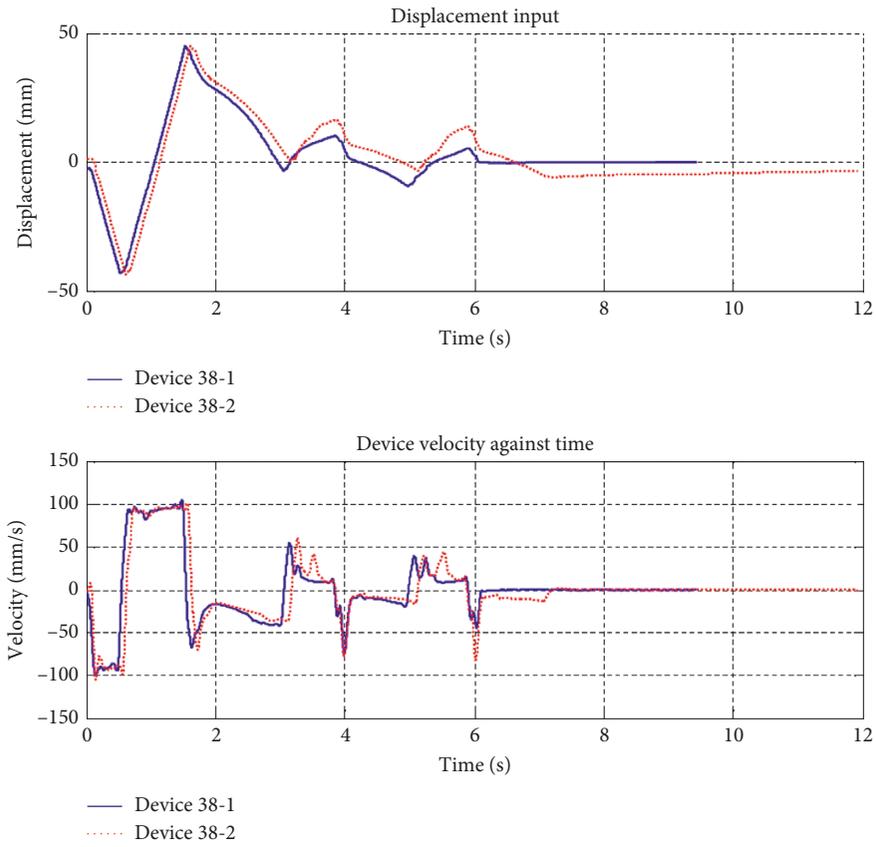


(a)

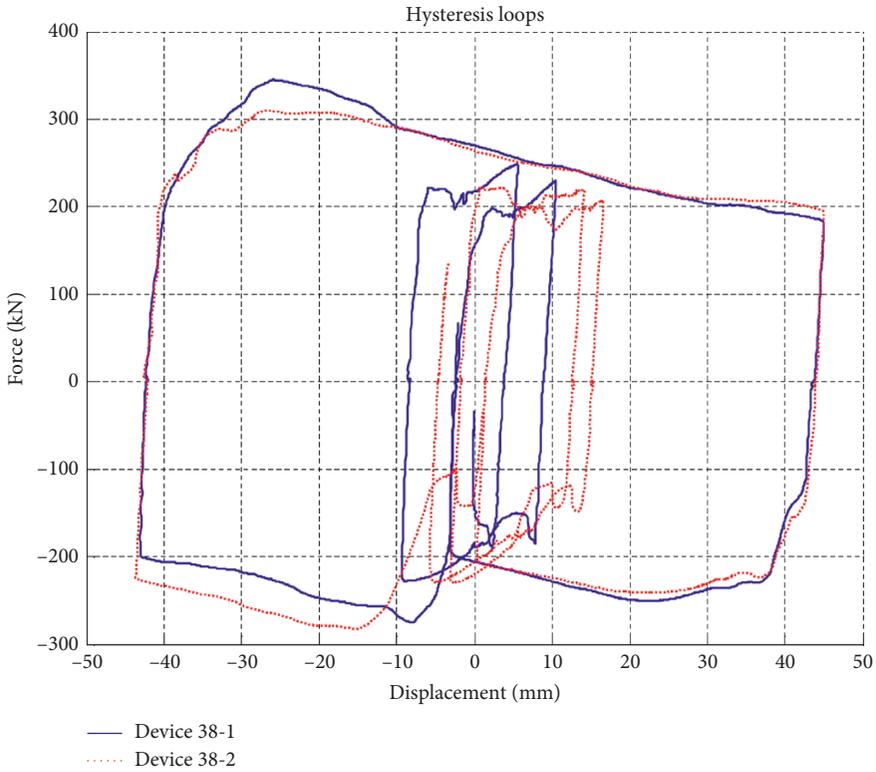


(b)

FIGURE 7: Representative results showing 3 fully reversed cycles at 100.0 mm/s device velocity command (but not achieved) with inputs of displacement and velocity (a) and resulting hysteresis loops (b).

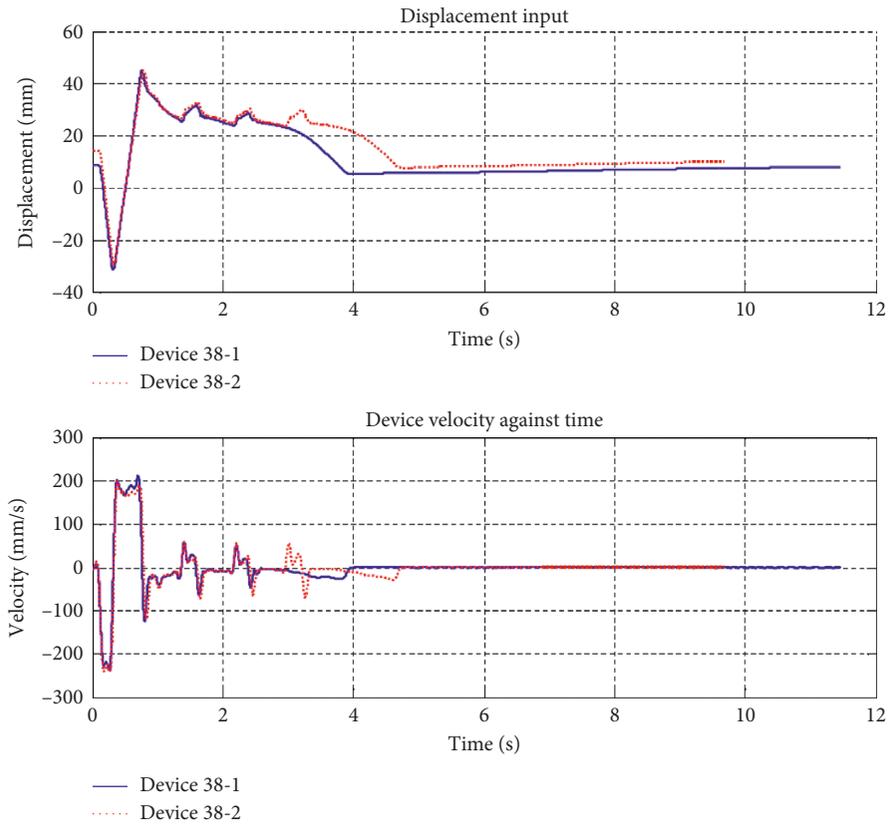


(a)

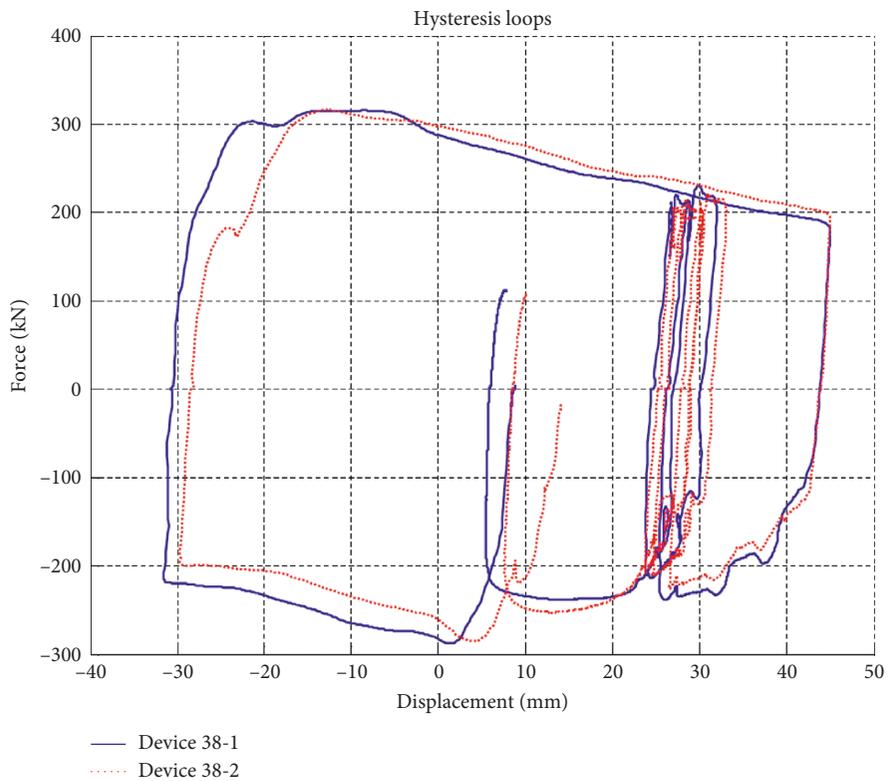


(b)

FIGURE 8: Representative results showing 3 fully reversed cycles at 200.0 mm/s device velocity command (but not achieved) with inputs of displacement and velocity (a) and resulting hysteresis loops (b).

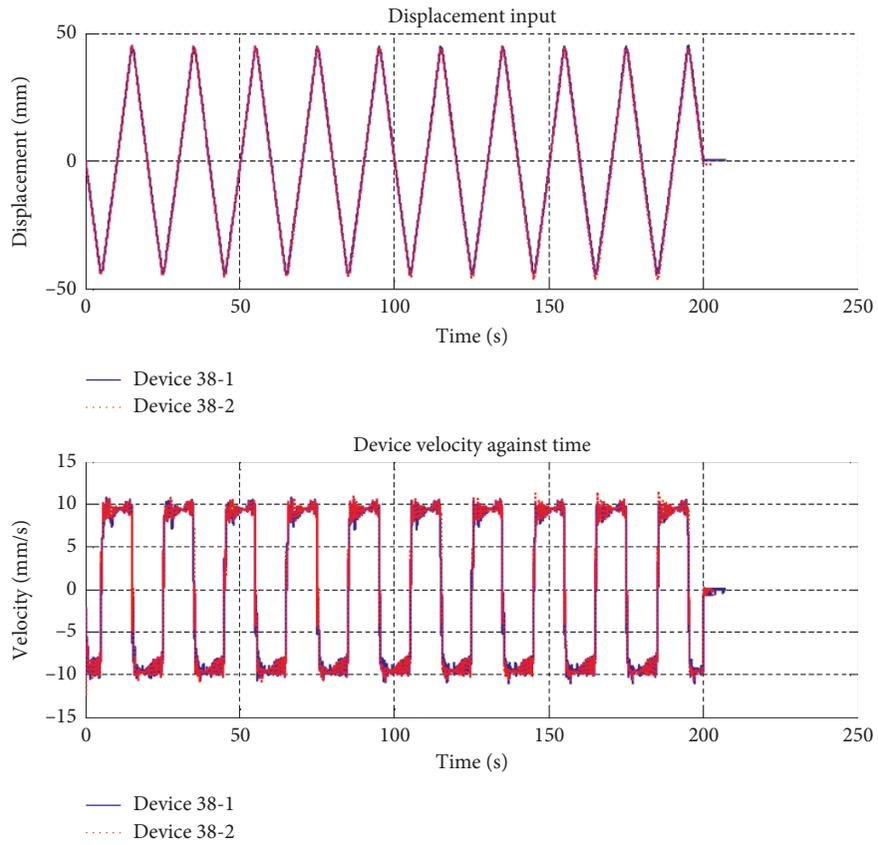

(a)

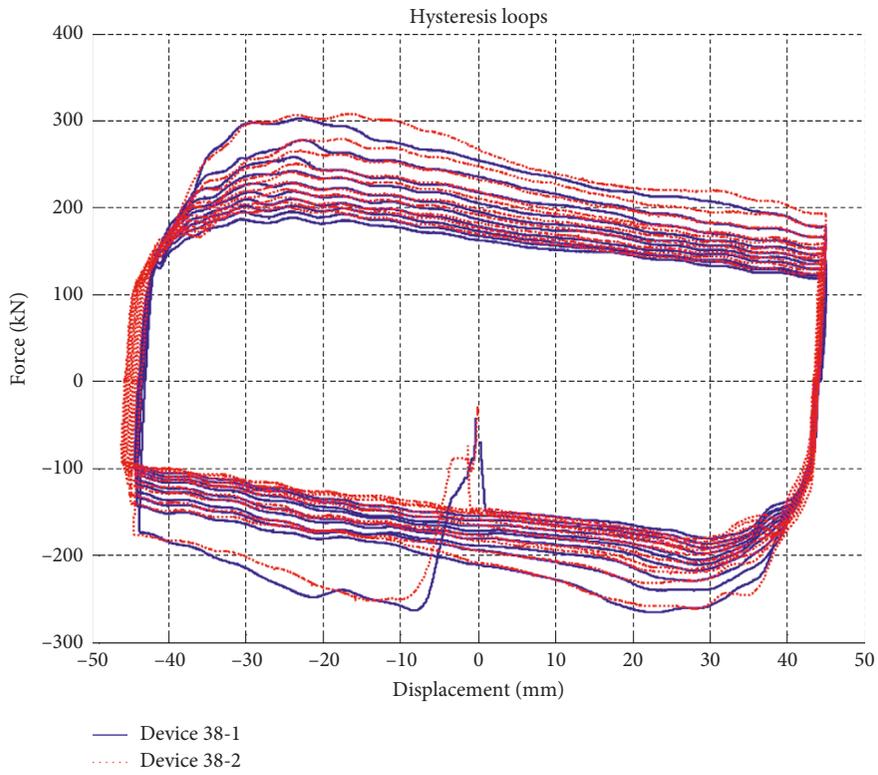

(b)

FIGURE 9: Two identical devices subjected to 10 fully reversed, near full-stroke displacement cycles at 10.0 mm/s.

Moreover, the input of 10 fully reversed, near full-stroke cycles is unlikely to ever be experienced in service. The stroke tested here represents a typical peak response amplitude for the maximum consider seismic event (MCSE) used in structural design. However, in such a response, only 1-2 cycles, rather than 10 fully reversed cycles, could be expected at this peak amplitude. Hence, the reduction after 2 cycles of approximately 10% is the more likely outcome in such large events and implies a relatively small reduction in use that is regained shortly after an event.

Finally, both devices in Figure 9 respond in a near identical fashion. This result, coupled with those in Figure 4, further validates the consistency of the device forces obtained, where, in this case, the 2 devices were selected at random from the 64 longer stroked devices. Importantly, even the degradation, cycle to cycle, as the lead heated, was consistent.

It is also important to put the results of Figure 9 into context. Yielding steel fuse-bars and buckling-restrained braces would likely have failed due to low-cycle fatigue if they were subjected to 10 cycles at this level of yield displacement [25, 26]. In addition, their stiffness and strength degradation would be permanent and not recovered post-event, requiring repair or replacement while leaving the structure more vulnerable. Likewise, if energy was absorbed via sacrificial damage, it is unlikely that the building would be serviceable or have much remaining capacity if it were to be subjected to this level of demand in the nearer term, as would have been the case in Christchurch, 2011.

Overall, these high-speed tests have provided a first insight into the velocity dependence of these devices at realistic input velocities. As noted, these could be much higher, approaching 1 m/sec, depending on the application and where the devices are designed into the structure. However, these tests are at far higher velocity than others we have found in the literature or elsewhere for HF2V or similar dissipation devices, although significant degradation was seen over many cycles in earlier, similar devices designed for base isolation [27]. It is also expected, as noted previously, that viscous dampers would not suffer this same effect but would have a stronger velocity dependence in some cases, barring non-Newtonian fluid viscous dampers, yielding potentially undesirable higher reaction forces in some cases [18–23].

A limitation of these tests is the inability to exceed ~20 mm/sec for any extended period of cycles and peak velocities for only a single cycle. Availability of systems within New Zealand that can provide such capacity is being developed, but were not available at the time of this work. These test systems represent a significant capital investment given the required pumps and accumulators necessary to supply actuators with enough consistent flow to achieve the required high forces and velocities from the actuators. As such systems become available, it would be useful to revisit this work and, in fact, many emerging devices to assess their velocity dependence and degradation at realistic velocities and force levels.

4. Conclusions

HF2V devices are an emerging, damage-free device for dissipating large amounts of seismic response energy. However, their velocity dependence and the consistency and robustness of base resistive force capacity in larger-scale manufacture have not been quantified. These issues provide an impediment to uptake in new or retrofit design and have been quantified in this study.

Quasistatic testing of 96 devices for a newly designed hospital in Christchurch indicated that base force capacity of mass produced devices deviated $\pm 10\%$ from the design quantity, with most well within this value. High-speed testing at device input velocities of 2.5 to 200 mm/s quantified a weak velocity dependence that reduces as the velocity increases to a point of being almost velocity independent due to a combination of a loss of frictional resistance at high speed and an increase in extrusion resistance. These two effects largely counteract one another, to produce resistive forces not affected by the shaft velocity. As a result, the total peak force and thus the peak demands on structural connections and foundations are effectively limited or capped using these devices.

Sustained cyclic testing showed that these devices do suffer some dynamic force degradation due to heat build-up softening the lead working material. However, these effects are temporary, and the strength capacity is restored once the devices cool down after testing. As the lead working material is the only part of the device undergoing plastic deformation and all other parts remain within the elastic region, low-cycle fatigue is not an important design consideration.

Overall, these HF2V damping devices are shown to produce consistent resistive forces in mass manufacture that are almost independent to input velocity at maximum likely structural input velocities, and the devices show a strong robustness to repeated cycles as well as to manufacture.

Data Availability

The data used to support the findings of this study are available from the corresponding author upon request.

Disclosure

An earlier version of the test results alone in this manuscript without analysis was presented as a poster in the NZ Society of Earthquake Engineering 2013 ASM.

Conflicts of Interest

The authors declare that they have no conflicts of interest.

Acknowledgments

The authors acknowledge direct funding grants for the testing in this work from Alan Reay Consultants Ltd, the engineering firm designing the Kilmore Street Medical Building. The authors also acknowledge Mr. Doug Heaton and Mr. Lance Cleeve who fabricated the devices tested.

References

- [1] G. W. Rodgers, J. G. Chase, J. B. Mander, N. C. Leach, and C. S. Denmead, "Experimental development, tradeoff analysis and design implementation of high force-to-volume damping technology," *Bulletin of the New Zealand Society for Earthquake Engineering*, vol. 40, no. 2, pp. 35–48, 2007.
- [2] G. W. Rodgers, J. B. Mander, J. G. Chase, R. P. Dhakal, N. C. Leach, and C. S. Denmead, "Spectral analysis and design approach for high force-to-volume extrusion damper-based structural energy dissipation," *Earthquake Engineering & Structural Dynamics*, vol. 37, no. 2, pp. 207–223, 2007.
- [3] G. W. Rodgers, K. M. Solberg, J. G. Chase et al., "Performance of a damage-protected beam-column subassembly utilizing external HF2V energy dissipation devices," *Earthquake Engineering & Structural Dynamics*, vol. 37, no. 13, pp. 1549–1564, 2008.
- [4] T. Mander, G. Rodgers, J. Chase, J. Mander, G. MacRae, and R. Dhakal, "A damage avoidance design steel beam-column moment connection using high-force-to-volume dissipators," *Journal of Structural Engineering*, vol. 135, no. 11, pp. 1390–1397, 2010.
- [5] S. J. Dyke, B. F. Spencer, M. K. Sain, and J. D. Carlson, "Modeling and control of magnetorheological dampers for seismic response reduction," *Smart Materials and Structures*, vol. 5, no. 5, pp. 565–575, 1999.
- [6] M. Bitaraf, O. E. Ozbulut, S. Hurlbaeus, and L. Barroso, "Application of semi-active control strategies for seismic protection of buildings with MR dampers," *Engineering Structures*, vol. 32, no. 10, pp. 3040–3047, 2010.
- [7] L. M. Jansen and S. J. Dyke, "Semiactive control strategies for MR dampers: comparative study," *Journal of Engineering Mechanics*, vol. 126, no. 8, pp. 795–803, 2000.
- [8] S. Sun, H. Deng, H. Du et al., "A compact variable stiffness and damping shock absorber for vehicle suspension," *IEEE/ASME Transactions on Mechatronics*, vol. 20, no. 5, pp. 2621–2629, 2015.
- [9] S. Talatahari, A. Kaveh, and N. Mohajer Rahbari, "Parameter identification of Bouc-Wen model for MR fluid dampers using adaptive charged system search optimization," *Journal of Mechanical Science and Technology*, vol. 26, no. 8, pp. 2523–2534, 2012.
- [10] W.-H. Lin and A. K. Chopra, "Asymmetric one-storey elastic systems with non-linear viscous and viscoelastic dampers: earthquake response," *Earthquake Engineering & Structural Dynamics*, vol. 32, no. 4, pp. 555–577, 2003.
- [11] M. D. Symans and M. C. Constantinou, "Semi-active control systems for seismic protection of structures: a state-of-the-art review," *Engineering Structures*, vol. 21, no. 6, pp. 469–487, 1999.
- [12] D. Case, B. Taheri, and E. Richer, "A lumped-parameter model for adaptive dynamic MR damper control," *IEEE/ASME Transactions on Mechatronics*, vol. 20, no. 4, pp. 1689–1696, 2015.
- [13] O. E. Ozbulut and S. Hurlbaeus, "Application of an SMA-based hybrid control device to 20-story nonlinear benchmark building," *Earthquake Engineering & Structural Dynamics*, vol. 41, no. 13, pp. 1831–1843, 2012.
- [14] S. Sabouri-Ghomi and A. Roufegarinejad, "Non-linear behavior of yielding damped braced frames," *The Structural Design of Tall and Special Buildings*, vol. 14, no. 1, pp. 37–45, 2005.
- [15] A. Lucchini, G. Monti, and S. Kunnath, "Seismic behavior of single-story asymmetric-plan buildings under uniaxial excitation," *Earthquake Engineering & Structural Dynamics*, vol. 38, no. 9, pp. 1053–1070, 2009.
- [16] A. D. Latham, A. M. Reay, and S. Pampanin, "Kilmore Street medical centre: application of a post-tensioned steel rocking system," in *Proceedings of the Steel Innovations Conference*, p. 10, Christchurch, New Zealand, February 2013.
- [17] G. W. Rodgers, J. B. Mander, and J. G. Chase, "Semi-explicit rate-dependent modeling of damage-avoidance steel connections using HF2V damping devices," *Earthquake Engineering & Structural Dynamics*, vol. 40, no. 9, pp. 977–992, 2010.
- [18] G. Pekcan, J. B. Mander, and S. S. Chen, "Experiments on steel MRF building with supplemental tendon system," *Journal of Structural Engineering*, vol. 126, no. 4, pp. 437–444, 2000.
- [19] G. Pekcan, J. B. Mander, and S. S. Chen, "Fundamental considerations for the design of non-linear viscous dampers," *Earthquake Engineering & Structural Dynamics*, vol. 28, pp. 1405–1425, 1999.
- [20] G. Alotta, L. Cavaleri, M. D. Paola, and M. F. Ferrotto, "Solutions for the design and increasing of efficiency of viscous dampers," *The Open Construction and Building Technology Journal*, vol. 10, no. 1, pp. 106–121, 2016.
- [21] L. Cavaleri, L. Di Trapani, and M. F. Ferrotto, "Experimental determination of viscous dampers parameters in low-velocity ranges," *Ingegneria Sismica*, vol. 34, no. 2, pp. 64–74, 2017.
- [22] N. Makris, G. F. Dargush, and M. C. Constantinou, "Dynamic analysis of generalized viscoelastic fluids," *Journal of Engineering Mechanics*, vol. 119, no. 8, pp. 1663–1679, 1993.
- [23] D. I. Narkhede and R. Sinha, "Behavior of nonlinear fluid viscous dampers for control of shock vibrations," *Journal of Sound and Vibration*, vol. 333, no. 1, pp. 80–98, 2014.
- [24] N. Makris and S.-P. Chang, "Effect of viscous, viscoplastic and friction damping on the response of seismic isolated structures," *Earthquake Engineering & Structural Dynamics*, vol. 29, no. 1, pp. 85–107, 2000.
- [25] K. Solberg, "Experimental and financial investigations into the further development of damage avoidance design," M. S Thesis, Department of Civil Engineering, University of Canterbury, Christchurch, New Zealand, 2007.
- [26] K. Solberg, R. P. Dhakal, B. Bradley, J. B. Mander, and L. Li, "Seismic performance of damage-protected beam-column joints," *ACI Structural Journal*, vol. 105, no. 2, pp. 205–214, 2008.
- [27] W. J. Cousins and T. E. Porritt, "Improvements to lead-extrusion damper technology," *Bulletin of the New Zealand National Society for Earthquake Engineering*, vol. 26, no. 3, pp. 342–348, 1993.

