

## Research Article

# ***SH*-Wave at a Plane Interface between Homogeneous and Inhomogeneous Fibre-Reinforced Elastic Half-Spaces**

**C. Zorammuana and S. S. Singh**

*Department of Mathematics & Computer Science, Mizoram University, Aizawl 796 004, Mizoram, India*

Correspondence should be addressed to S. S. Singh; saratcha32@yahoo.co.uk

Received 11 May 2015; Revised 23 June 2015; Accepted 24 June 2015

Academic Editor: Fernando Rubio-Marcos

Copyright © 2015 C. Zorammuana and S. S. Singh. This is an open access article distributed under the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

The problem of reflection and refraction of *SH*-waves at a plane interface between the homogeneous and inhomogeneous fibre-reinforced elastic half-spaces has been investigated. Amplitude and energy ratios corresponding to the reflected and refracted *SH*-waves are derived using appropriate boundary conditions. These ratios are computed numerically for a particular model and the results are depicted graphically.

## **1. Introduction**

Fibre-reinforced composite material with the reinforcement distributed continuously in concentric circles is a locally transversely isotropic material, with the circumferential direction as the preferred direction coinciding with fibres directions. The fibres may be continuous, in which each fibre extends through a body from one boundary to another, or discontinuous, but in the discontinuous case the length of the fibre must be large compared to its diameter. The elastic fibre-reinforced composite materials, for example, typical carbon fibre-epoxy resin composites, are not just anisotropic but also strongly anisotropic in the sense that the modulus for extension in the fibre direction greatly exceeds the moduli for extension in the transverse direction and for shear in the fibre or transverse direction. Fibres have an excellent potential to improve the mechanical properties of rapid-setting materials and could be used effectively to improve the performance of repairs. The behavior of fibre-reinforced rapid-setting materials is similar to that of Portland cement fibre-reinforced concrete. Spencer [1] gave the concept of deformation in fibre-reinforced elastic materials. Belfield et al. [2] discussed the problem of stress in elastic plates reinforced by fibers lying in concentric circles and explained the anisotropic characters of fibre-reinforced materials. Sengupta and Nath [3] studied the problem of surface waves in fibre-reinforced anisotropic

elastic media and derived the frequency equation for surface wave. Chattopadhyay et al. [4] investigated the problem of reflection of quasi-*P* and quasi-*SV* waves at the plane-free and rigid boundaries of a fibre-reinforced elastic medium and obtained the phase velocity of quasi-*P* and quasi-*SV* waves. B. Singh and S. J. Singh [5] discussed the problem of reflection of plane waves at the free surface of a fibre-reinforced elastic half-space and obtained the closed form expression of the amplitude ratios for reflected *qSV* and *qP* waves at the free surface of a fibre-reinforced, anisotropic, homogeneous, elastic half-space. Singh [6] studied the problem of propagation of plane waves in thermally conducting linear fibre-reinforced composite materials and derived the frequency equation. Abbas [7] discussed a two-dimensional problem for a fibre-reinforced anisotropic thermoelastic half-space with energy dissipation and the results with energy dissipation and without energy dissipation are compared. Singh and Zorammuana [8] solved the problem of incident longitudinal wave at a fibre-reinforced thermoelastic half-space and obtained the amplitude and energy ratios of the reflected waves.

A number of researchers have attempted the problem of *SH*-waves in elastic media. Gutenberg [9, 10] explored the existence of low velocity layer in the earth mantle. Chattopadhyay and Keshri [11] discussed the propagation of shear waves along the plane surface between two different elastic

media with initial stress. Singh and Tomar [12] investigated the problem of shear waves at a corrugated interface between two dissimilar fiber-reinforced elastic half-spaces using Rayleigh's method of approximation. Chattopadhyay and Singh [13] studied the problem of  $G$ -type seismic waves in fibre-reinforced media and obtained the dispersion equation for the propagation of  $G$ -type seismic wave in fibre-reinforced layer lying over an inhomogeneous fibre-reinforced elastic half-space. Literatures showed many problems of propagation of  $SH$ -waves and notable among them are Bath and Arroyo [14], Gupta [15], Tomar et al. [16], Kumar et al. [17], Chaudhary et al. [18, 19], Emets et al. [20], Chattopadhyay and Michel [21], Tomar and Singh [22], Tomar and Kaur [23, 24], Abd-Alla and Alsheikh [25], Chattopadhyay et al. [26], Singh [27], Wang and Zhao [28], and Sahu et al. [29].

Fibre-reinforced composite materials are very attractive in many engineering applications due to their high strength and low weight. In this paper, the problem of reflection and refraction of  $SH$ -waves in the homogeneous/inhomogeneous fibre-reinforced elastic half-spaces has been studied. We have obtained the amplitude and energy ratios corresponding to the reflected and refracted  $SH$ -waves using appropriate boundary conditions. These ratios are computed numerically for a particular model.

## 2. Basic Equations

The constitutive relation for a linearly fibre-reinforced elastic medium is given by Belfield et al. [2] as

$$\begin{aligned} \tau_{ij} = & \lambda e_{kk} \delta_{ij} + 2\mu_T e_{ij} + \alpha (a_k a_m e_{km} \delta_{ij} + e_{kk} a_i a_j) \\ & + 2(\mu_L - \mu_T) (a_i a_k e_{kj} + a_j a_k e_{ki}) \\ & + \beta a_k a_m e_{km} a_i a_j, \quad (i, j, k, m = 1, 2, 3), \end{aligned} \quad (1)$$

where  $\tau_{ij}$  is stress tensor,  $e_{ij}$  is strain tensor and is defined by

$$e_{ij} = \frac{1}{2} (u_{i,j} + u_{j,i}), \quad (2)$$

$\lambda$ ,  $\mu_T$ ,  $\alpha$ ,  $\beta$ , and  $\mu_L$  are elastic constants in which  $\mu_T$  is identified as the shear modulus in transverse shear across the preferred direction and  $\mu_L$  as the shear modulus in longitudinal shear in the preferred direction,  $\alpha$  and  $\beta$  are specific stress components depending upon the concrete part of the composite materials,  $\delta_{ij}$  is Kronecker delta, and  $a_i$  is the component of a unit vector  $\mathbf{a} = (a_1, a_2, a_3)$  which gives the preferred direction of fibre-reinforcement and  $a_1^2 + a_2^2 + a_3^2 = 1$ .

The equation of motion for the fibre-reinforced elastic material without body forces may be written as

$$\tau_{ij,j} = \rho \frac{\partial^2 u_i}{\partial t^2}, \quad (i, j = 1, 2, 3), \quad (3)$$

where  $u_i = (u_1, u_2, u_3)$  and  $x_i = x, x_2 = y, x_3 = z$ .

Let us take two-dimensional problem of  $SH$ -wave propagation in  $xz$ -plane and the preferred direction of fibre-reinforcement is taken as  $(a_1, 0, a_3)$ . We may take  $u_1 = u_3 = 0$ ,  $u_2 = u_2(x, z, t)$ . With the help of (1) and (3), we have

$$\frac{\partial \tau_{12}}{\partial x} + \frac{\partial \tau_{23}}{\partial z} = \rho \frac{\partial^2 u_2}{\partial t^2}, \quad (4)$$

where

$$\begin{aligned} \tau_{12} &= \mu_T \frac{\partial u_2}{\partial x} + (\mu_L - \mu_T) a_1 \left( a_1 \frac{\partial u_2}{\partial x} + a_3 \frac{\partial u_2}{\partial z} \right), \\ \tau_{23} &= \mu_T \frac{\partial u_2}{\partial z} + (\mu_L - \mu_T) a_3 \left( a_1 \frac{\partial u_2}{\partial x} + a_3 \frac{\partial u_2}{\partial z} \right). \end{aligned} \quad (5)$$

It may be noted that the second term in the expression of the stress tensors ( $\tau_{12}$  and  $\tau_{23}$ ) contributes due to the effect of direction of reinforcement, that is, fibre orientation in the self-reinforced material.

Using the stress tensors into (4), we obtain the equation of motion for  $SH$ -wave propagation in the fibre-reinforced elastic medium as

$$P \frac{\partial^2 u_2}{\partial z^2} + Q \frac{\partial^2 u_2}{\partial x^2} + R \frac{\partial^2 u_2}{\partial x \partial z} = \rho \frac{\partial^2 u_2}{\partial t^2}, \quad (6)$$

where

$$\begin{aligned} P &= \mu_T + a_3^2 (\mu_L - \mu_T), \\ Q &= \mu_T + a_1^2 (\mu_L - \mu_T), \\ R &= 2a_1 a_3 (\mu_L - \mu_T). \end{aligned} \quad (7)$$

## 3. Problem Formulation

Let  $x$ - and  $y$ -axes of the Cartesian coordinate system be on the horizontal plane and let  $z$ -axis be pointing vertically downward. Consider a homogeneous fibre-reinforced elastic half-space,  $\{H; 0 \leq z < \infty\}$  with  $\rho$  as density and  $\mu_L, \mu_T$  as elastic constants and a nonhomogeneous fibre-reinforced elastic half-space,  $\{H'; -\infty < z \leq 0\}$  with  $\rho'$  as density and  $\mu'_L, \mu'_T$  as elastic constants. The elastic constants and density in the nonhomogeneous fibre-reinforced elastic half-space  $H'$  are defined as (see [13])

$$\begin{aligned} \mu'_L &= \mu_L^{(0)} (1 - \varepsilon \cos sz), \\ \mu'_T &= \mu_T^{(0)} (1 - \varepsilon \cos sz), \\ \rho' &= \rho_0 (1 - \varepsilon \cos sz), \end{aligned} \quad (8)$$

where  $\varepsilon$  is small positive constant and  $s$  is real depth parameter.

The stress tensors in the nonhomogeneous fibre-reinforced elastic half-space ( $H'$ ) are

$$\begin{aligned} \tau'_{12} &= \mu'_T \frac{\partial u'_2}{\partial x} + (\mu'_L - \mu'_T) a_1 \left( a_1 \frac{\partial u'_2}{\partial x} + a_3 \frac{\partial u'_2}{\partial z} \right), \\ \tau'_{23} &= \mu'_T \frac{\partial u'_2}{\partial z} + (\mu'_L - \mu'_T) a_3 \left( a_1 \frac{\partial u'_2}{\partial x} + a_3 \frac{\partial u'_2}{\partial z} \right). \end{aligned} \quad (9)$$

The equation of motion for *SH*-wave in the half-space,  $H'$ , may be written as

$$\begin{aligned}
 P^{(0)} & \left\{ (1 - \varepsilon \cos sz) \frac{\partial^2 u'_2}{\partial z^2} + \varepsilon s \sin sz \frac{\partial u'_2}{\partial z} \right\} \\
 & + Q^{(0)} (1 - \varepsilon \cos sz) \frac{\partial^2 u'_2}{\partial x^2} \\
 & + R^{(0)} \left\{ 2 (1 - \varepsilon \cos sz) \frac{\partial^2 u'_2}{\partial x \partial z} + \varepsilon s \sin sz \frac{\partial u'_2}{\partial x} \right\} \\
 & = \rho_0 (1 - \varepsilon \cos sz) \frac{\partial^2 u'_2}{\partial t^2},
 \end{aligned} \tag{10}$$

where

$$\begin{aligned}
 P^{(0)} & = \mu_T^{(0)} + a_3^2 (\mu_L^{(0)} - \mu_T^{(0)}), \\
 Q^{(0)} & = \mu_T^{(0)} + a_1^2 (\mu_L^{(0)} - \mu_T^{(0)}), \\
 R^{(0)} & = a_1 a_3 (\mu_L^{(0)} - \mu_T^{(0)}).
 \end{aligned} \tag{11}$$

The displacement components in the half-spaces,  $H$  and  $H'$ , may be represented by

$$\begin{aligned}
 \langle u_2, u'_2 \rangle (x, z, t) \\
 = \langle A, B \rangle \exp [i \{ \omega t - k (x p_1 + z p_3) \}],
 \end{aligned} \tag{12}$$

where  $\langle A, B \rangle$  are amplitude constants,  $\omega (= kc)$  is angular frequency, and  $\mathbf{p} = (p_1, 0, p_3)$  is the unit propagation vector.

Using (12) into (6) and (10), the phase velocities of *SH*-waves in the half-spaces,  $H$  and  $H'$ , are, respectively, given by

$$\rho c_2^2 = P p_3^2 + Q p_1^2 + R p_1 p_3, \tag{13}$$

$$\begin{aligned}
 \rho_0 c_2'^2 \\
 = P^{(0)} \{ p_3^2 + \varepsilon s p_3 \sin sz (1 - \varepsilon \cos sz)^{-1} k^{-1} \} \\
 + Q^{(0)} p_1^2 \\
 + R^{(0)} \{ 2 p_1 p_3 + \varepsilon s p_1 \sin sz (1 - \varepsilon \cos sz)^{-1} k^{-1} \}.
 \end{aligned} \tag{14}$$

The expression of  $c_2'$  depending on  $\varepsilon$  may be written as

(i) zeroth order,  $O(\varepsilon^0)$ :

$$\rho_0 c_2'^2 = P^{(0)} p_3^2 + Q^{(0)} p_1^2 + R^{(0)} 2 p_1 p_3, \tag{15}$$

(ii) first order,  $O(\varepsilon^1)$ :

$$\begin{aligned}
 \rho_0 c_2'^2 = P^{(0)} & \left[ p_3^2 \right. \\
 & + \varepsilon s p_3 \left\{ sz - \frac{(sz)^3}{3!} + \frac{(sz)^5}{5!} - \frac{(sz)^7}{7!} + \dots \right\} k^{-1} \left. \right] \\
 & + Q^{(0)} p_1^2 + R^{(0)} \left[ 2 p_1 p_3 \right. \\
 & + \varepsilon s p_1 \left\{ sz - \frac{(sz)^3}{3!} + \frac{(sz)^5}{5!} - \frac{(sz)^7}{7!} + \dots \right\} k^{-1} \left. \right],
 \end{aligned} \tag{16}$$

(iii) second order,  $O(\varepsilon^2)$ :

$$\begin{aligned}
 \rho_0 c_2'^2 = P^{(0)} & \left[ p_3^2 + \varepsilon s p_3 \left\{ sz - \frac{(sz)^3}{3!} + \frac{(sz)^5}{5!} - \frac{(sz)^7}{7!} \right. \right. \\
 & + \dots \left. \right\} k^{-1} + \varepsilon^2 s p_3 \left[ \left\{ sz - \frac{(sz)^3}{2!} + \frac{(sz)^5}{4!} - \dots \right\} \right. \\
 & + \left. \left\{ -\frac{(sz)^3}{3!} + \frac{(sz)^5}{3!2!} - \frac{(sz)^7}{3!4!} + \dots \right\} \right. \\
 & + \left. \left. \left\{ \frac{(sz)^5}{5!} - \frac{(sz)^7}{5!2!} + \frac{(sz)^9}{5!4!} \dots \right\} \right] k^{-1} \right] + Q^{(0)} p_1^2 \\
 & + R^{(0)} \left[ 2 p_1 p_3 + \varepsilon s p_1 \left\{ sz - \frac{(sz)^3}{3!} + \frac{(sz)^5}{5!} - \frac{(sz)^7}{7!} \right. \right. \\
 & + \dots \left. \right\} k^{-1} + \varepsilon^2 s p_1 \left[ \left\{ sz - \frac{(sz)^3}{2!} + \frac{(sz)^5}{4!} - \dots \right\} \right. \\
 & + \left. \left\{ -\frac{(sz)^3}{3!} + \frac{(sz)^5}{3!2!} - \frac{(sz)^7}{3!4!} + \dots \right\} \right. \\
 & + \left. \left. \left\{ \frac{(sz)^5}{5!} - \frac{(sz)^7}{5!2!} + \frac{(sz)^9}{5!4!} \dots \right\} \right] k^{-1} \right],
 \end{aligned} \tag{17}$$

and so on. We will use expression (15) of  $c_2'$  for the numerical computation.

### 4. Wave Propagation

Suppose a plane *SH*-wave with amplitude,  $A_0$ , making an angle  $\theta_0$  with the normal be incident at the plane interface ( $z = 0$ ) between homogeneous and inhomogeneous fibre-reinforced elastic half-spaces. Such an incident *SH*-wave, due to the interface, give rises a reflected *SH*-wave in the half-space,  $H$ , and a refracted *SH*-wave in the half-space,  $H'$ . The geometry of the problem is given in Figure 1.

The total displacement due to incident and reflected *SH*-waves in the half-space,  $H$ , is given by

$$\begin{aligned}
 u_2 = A_0 \exp [i \{ \omega t - k_0 (x \sin \theta_0 + z \cos \theta_0) \}] \\
 + A \exp [i \{ \omega t - k_2 (x \sin \theta_1 - z \cos \theta_1) \}],
 \end{aligned} \tag{18}$$

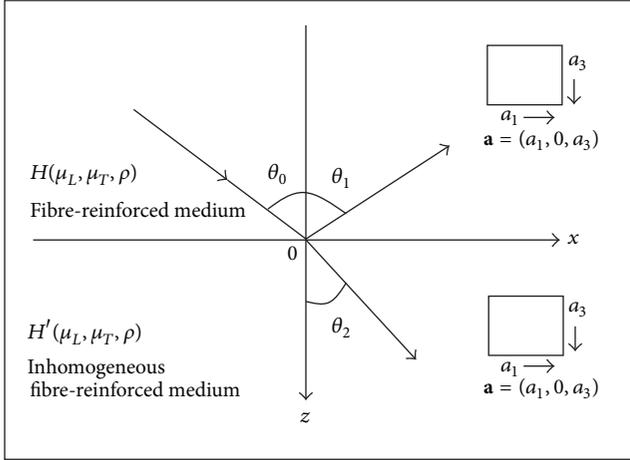


FIGURE 1: Geometry of the problem.

where  $A$  is the amplitude constant of the reflected  $SH$ -wave at an angle  $\theta_1$ ,  $k_i = \omega/c_i$  ( $i = 0, 2$ ) is the wavenumber,  $\omega$  is angular frequency, and  $c_i$  is the phase speed.

The displacement due to refracted  $SH$ -wave in the half-space,  $H'$ , is given by

$$u'_2 = B \exp [i \{ \omega t - k'_2 (x \sin \theta_2 + z \cos \theta_2) \}], \quad (19)$$

where  $k'_2 = \omega/c'_2$  is the wavenumber with  $c'_2$  as the phase speed and  $B$  is the amplitude constant of the refracted  $SH$ -wave at an angle  $\theta_2$ . Snell's law of this problem is given by

$$k_0 \sin \theta_0 = k_2 \sin \theta_1 = k'_2 \sin \theta_2. \quad (20)$$

We assume that the angle of incidence is equal to the angle of reflection.

## 5. Boundary Conditions

The boundary conditions are the continuities of the displacements and stress tensors at the interface. Mathematically, these conditions at  $z = 0$  are

$$u_2 = u'_2, \quad (21)$$

$$\tau_{23} = \tau'_{23}. \quad (22)$$

Equation (22) may be written in terms of displacement as

$$\begin{aligned} \mu_T \frac{\partial u_2}{\partial z} + (\mu_L - \mu_T) a_3 \left( a_1 \frac{\partial u_2}{\partial x} + a_3 \frac{\partial u_2}{\partial z} \right) \\ = \mu'_T \frac{\partial u'_2}{\partial z} + (\mu'_L - \mu'_T) a_3 \left( a_1 \frac{\partial u'_2}{\partial x} + a_3 \frac{\partial u'_2}{\partial z} \right). \end{aligned} \quad (23)$$

Using (18)–(20) into boundary conditions (21) and (23), we have

$$\begin{aligned} \frac{A}{A_0} - \frac{B}{A_0} &= -1, \\ r_1 \frac{A}{A_0} + r_2 \frac{B}{A_0} &= r_0, \end{aligned} \quad (24)$$

where

$$\begin{aligned} r_0 &= \mu_T k_0 \cos \theta_0 + (\mu_L - \mu_T) a_3 (a_3 k_0 \cos \theta_0 \\ &\quad + a_1 k_0 \sin \theta_0), \\ r_1 &= \mu_T k_2 \cos \theta_1 + (\mu_L - \mu_T) a_3 (a_3 k_2 \cos \theta_1 \\ &\quad - a_1 k_0 \sin \theta_0), \\ r_2 &= \{ \mu_T^{(0)} k'_2 \cos \theta_2 \\ &\quad + (\mu_L^{(0)} - \mu_T^{(0)}) a_3 (a_3 k'_2 \cos \theta_2 + a_1 k_0 \sin \theta_0) \} (1 \\ &\quad - \varepsilon). \end{aligned} \quad (25)$$

These equations will give the amplitude ratios corresponding to the reflected and refracted  $SH$ -waves.

## 6. Amplitude and Energy Ratio

The amplitude ratios of the reflected and refracted  $SH$ -waves are defined as the ratio of the amplitudes corresponding to the reflected and refracted waves to that of the incident wave. Solving (24), we have

$$\begin{aligned} \frac{A}{A_0} &= \frac{r_0 - r_2}{r_1 + r_2}, \\ \frac{B}{A_0} &= \frac{r_0 + r_1}{r_1 + r_2}, \end{aligned} \quad (26)$$

where  $A/A_0$  is the amplitude ratios corresponding to the reflected  $SH$ -wave and  $B/A_0$  is that of the refracted  $SH$ -wave. We have observed that these ratios depend on the elastic constants, fibre orientation, inhomogeneity parameter, and the angle of incidence.

Let us consider the energy partition of the reflected and refracted  $SH$ -waves due to the plane interface,  $z = 0$ . The energy transmission per unit area may be given as (see [30])

$$\varphi^* = \tau_{23} \cdot \dot{u}_2 + \tau'_{23} \cdot \dot{u}'_2. \quad (27)$$

The expression of the energy due to incident wave is given by

$$E_{\text{inc}} = J_0 \omega A_0^2 \exp [2i \{ \omega t - k_0 (x \sin \theta_0 + z \cos \theta_0) \}], \quad (28)$$

where  $J_0 = k_0 \{ \mu_T \cos \theta_0 + (\mu_L - \mu_T) a_3 (a_3 \cos \theta_0 + a_1 \sin \theta_0) \}$ .

The energy ratio of the reflected and refracted  $SH$ -waves may be defined as the ratios of the energy corresponding to the reflected and refracted  $SH$ -waves to that of the incident wave. The modulus of energy ratios of the reflected and refracted  $SH$ -waves is given as

$$\begin{aligned} E_1 &= \left| \frac{J_1}{J_0} \right| \left| \frac{A}{A_0} \right|^2, \\ E_2 &= \left| \frac{J_2}{J_0} \right| \left| \frac{B}{A_0} \right|^2, \end{aligned} \quad (29)$$

where  $E_1$  is the energy ratio of the reflected  $SH$ -wave and  $E_2$  is that of refracted  $SH$ -wave and the expressions of  $J_1$  and  $J_2$  are given by

$$\begin{aligned} J_1 &= -k_2 [\mu_T \cos \theta_1 \\ &\quad + (\mu_L - \mu_T) a_3 (a_3 \cos \theta_1 - a_1 \sin \theta_1)], \\ J_2 &= k_2' [\mu_T^{(0)} \cos \theta_2 \\ &\quad + (\mu_L^{(0)} - \mu_T^{(0)}) a_3 (a_3 \cos \theta_2 + a_1 \sin \theta_2)] (1 - \varepsilon). \end{aligned} \quad (30)$$

We come to know that the energy ratios are functions of the amplitude ratios, elastic constants, fibre orientation, inhomogeneity parameter, and the angle of incidence of the incident  $SH$ -wave.

## 7. Particular Cases

7.1. *Case I.* When the inhomogeneous fibre-reinforced elastic half-space,  $H'$ , reduces to homogeneous fibre-reinforced elastic medium, the problem reduces to the reflection and refraction of  $SH$ -waves at the plane interface between the two dissimilar homogeneous fibre-reinforced elastic half-spaces. Under this condition,  $\varepsilon = 0$  and (14) reduces to

$$\rho_0 c_2'^2 = P^{(0)} p_3^2 + Q^{(0)} p_1^2 + 2R^{(0)} p_1 p_3. \quad (31)$$

The amplitude and energy ratios corresponding to the reflected and refracted  $SH$ -waves are given by (26) and (29) with the following modified values:

$$\begin{aligned} r_0 &= \mu_T k_0 \cos \theta_0 + (\mu_L - \mu_T) a_3 (a_3 k_0 \cos \theta_0 \\ &\quad + a_1 k_0 \sin \theta_0), \\ r_1 &= \mu_T k_2 \cos \theta_1 + (\mu_L - \mu_T) a_3 (a_3 k_2 \cos \theta_1 \\ &\quad - a_1 k_2 \sin \theta_1), \\ r_2 &= \mu_T^{(0)} k_2' \cos \theta_2 + (\mu_L^{(0)} - \mu_T^{(0)}) a_3 (a_3 k_2' \cos \theta_2 \\ &\quad + a_1 k_2' \sin \theta_2), \\ J_1 &= -k_2 [\mu_T \cos \theta_1 \\ &\quad + (\mu_L - \mu_T) a_3 (a_3 \cos \theta_1 - a_1 \sin \theta_1)], \\ J_2 &= k_2' [\mu_T^{(0)} \cos \theta_2 \\ &\quad + (\mu_L^{(0)} - \mu_T^{(0)}) a_3 (a_3 \cos \theta_2 + a_1 \sin \theta_2)]. \end{aligned} \quad (32)$$

These results are similar to those of Singh and Tomar [12].

7.2. *Case II.* When the two half-spaces  $H$  and  $H'$  reduce to homogeneous isotropic elastic media, the problem reduces

to the reflection and refraction of  $SH$ -waves between two dissimilar isotropic elastic half-spaces. Under this condition,

$$\begin{aligned} P^{(0)} &= Q^{(0)} = \mu_T^{(0)} = \mu_L^{(0)} = \mu_0, \\ P &= Q = \mu_T = \mu_L = \mu, \\ R^{(0)} &= R = 0, \\ c_2^2 &= \frac{\mu}{\rho}, \\ c_2'^2 &= \frac{\mu_0}{\rho_0}. \end{aligned} \quad (33)$$

The amplitude and energy ratios corresponding to the reflected and refracted  $SH$ -waves are given by (26) and (29) with the following modified values:

$$\begin{aligned} r_0 &= \mu k_0 \cos \theta_0, \\ r_1 &= \mu k_2 \cos \theta_1, \\ r_2 &= \mu_0 k_2' \cos \theta_2, \\ J_1 &= -k_2 \mu \cos \theta_1, \\ J_2 &= k_2' \mu_0 \cos \theta_2. \end{aligned} \quad (34)$$

These results exactly match with that of Achenbach [30].

## 8. Numerical Results and Discussion

For the numerical computations, we take the following relevant parameters for fibre-reinforced elastic half-space,  $H$ , and the nonhomogeneous fibre-reinforced elastic half-space,  $H'$  [13].


For the homogeneous half-space  $H$ ,

$$\begin{aligned} \mu_L &= 7.07 \times 10^9 \text{ N/m}^2, \\ \mu_T &= 3.5 \times 10^9 \text{ N/m}^2, \\ \rho &= 1600 \text{ Kg/m}^3. \end{aligned} \quad (35)$$


For the nonhomogeneous half-space  $H'$ ,

$$\begin{aligned} \mu_L^{(0)} &= 5.66 \times 10^9 \text{ N/m}^2, \\ \mu_T^{(0)} &= 2.46 \times 10^9 \text{ N/m}^2, \\ \rho_0 &= 7800 \text{ Kg/m}^3, \\ a_1 &= 0.00316227, \\ \varepsilon &= 0.0, 0.1, 0.2. \end{aligned} \quad (36)$$


The variation of the modulus of amplitude ratios corresponding to the reflected and refracted  $SH$ -waves with the angle of incidence,  $\theta_0$ , is depicted in Figures 2 and 3 with and without fibre-reinforcement at different values of inhomogeneity parameter,  $\varepsilon$ . In Figures 2(a) and 2(b), the amplitude

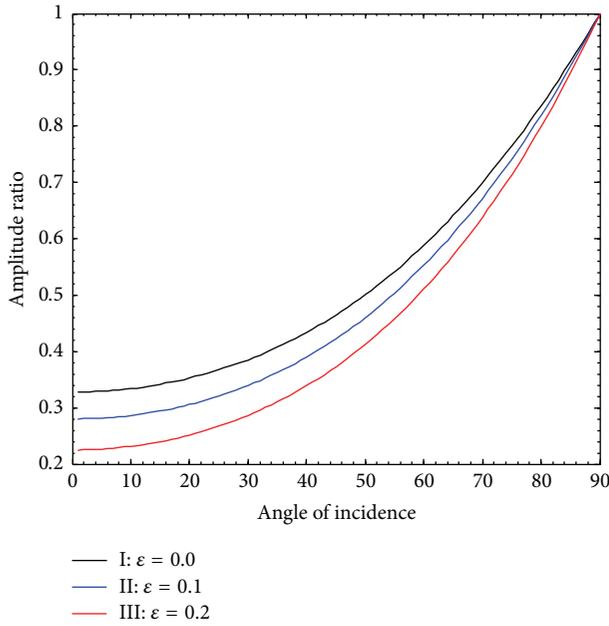


(a) In the presence of reinforcement

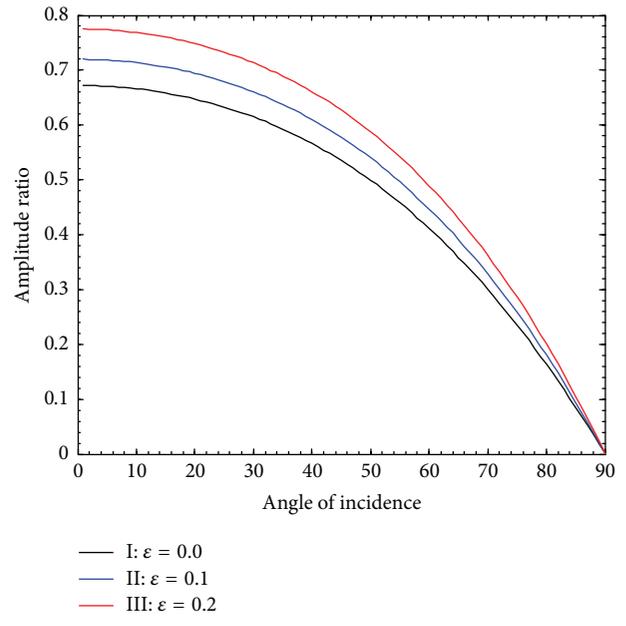

(a) In the presence of reinforcement

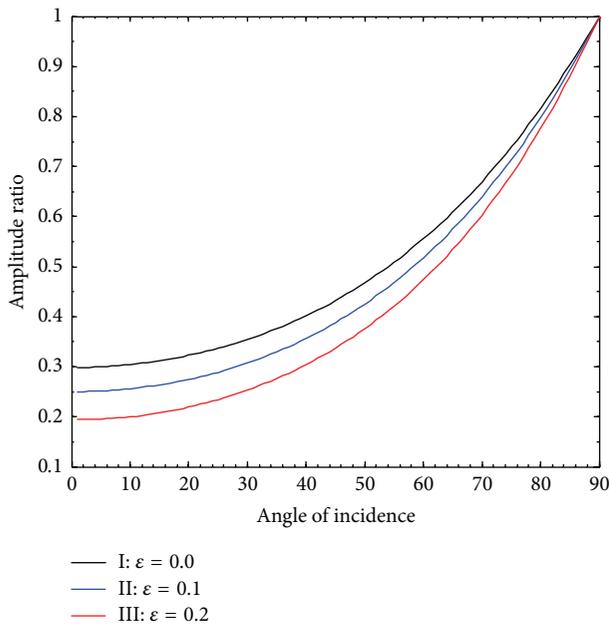

(b) In the absence of reinforcement

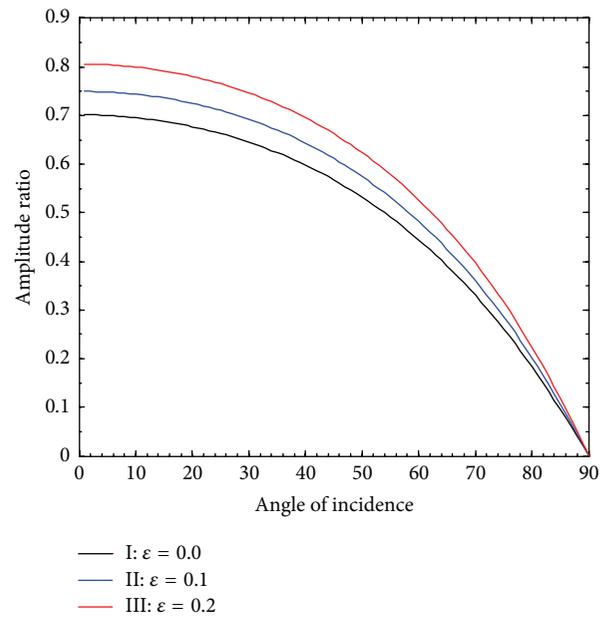

(b) In the absence of reinforcement

FIGURE 2: Variation of the modulus of amplitude ratio,  $A/A_0$  with  $\theta_0$ .


FIGURE 3: Variation of the modulus of amplitude ratio,  $B/A_0$  with  $\theta_0$ .

ratio,  $A/A_0$ , corresponding to the reflected *SH*-wave starts from certain values and increases with the increase of  $\theta_0$  which attains the maximum value at the grazing angle of incidence. The values of  $A/A_0$  decrease with the increase of inhomogeneity parameter.


All Curves I, II, and III in Figures 3(a) and 3(b) show that  $B/A_0$  corresponding to the refracted *SH*-wave decreases with the increase of  $\theta_0$  and attains the minimum value at the grazing angle of incidence. The values of  $B/A_0$  increase with the increase of inhomogeneity parameter. Figures 4

and 5 show the variation of the modulus of energy ratios corresponding to the reflected and refracted *SH*-waves with the angle of incidence with and without fibre-reinforcement at different values of inhomogeneity parameter,  $\epsilon$ . In Figures 4(a) and 4(b),  $E_1$  corresponding to the reflected *SH*-wave starts from certain values and increases up to  $\theta_0 = 88^\circ$  and decreases to  $\theta_0 = 89^\circ$  which increases thereafter with the increase of  $\theta_0$ .

The modulus of energy ratio,  $E_2$ , corresponding to the refracted *SH*-wave in Figures 5(a) and 5(b) starts from certain

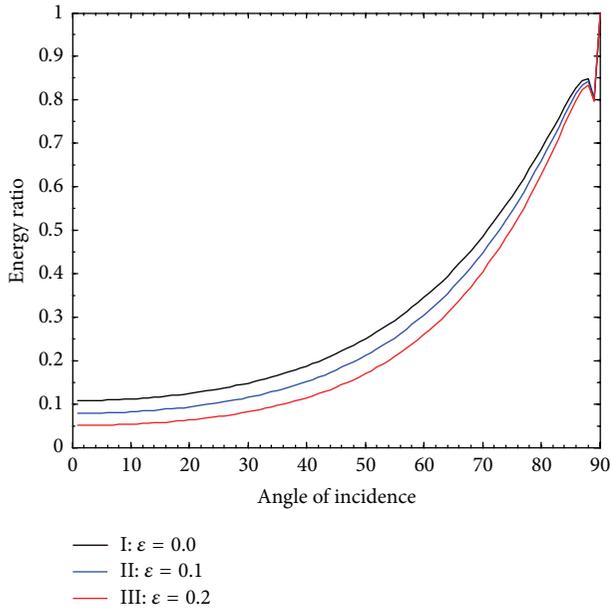

(a) In the presence of reinforcement

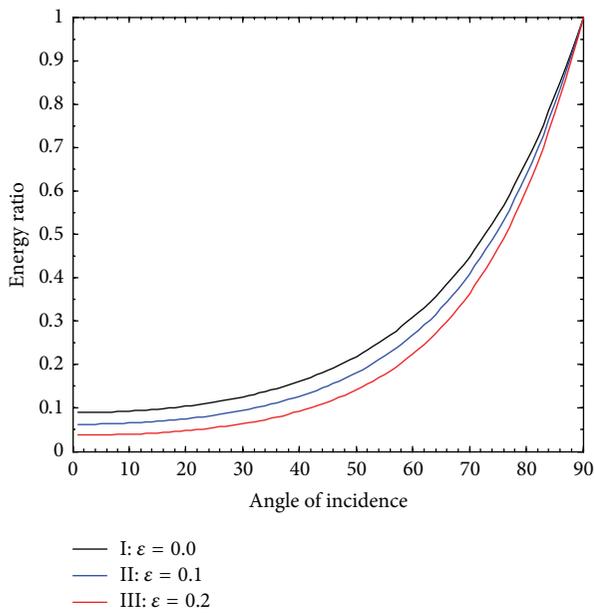


(b) In the absence of reinforcement

FIGURE 4: Variation of the modulus of energy ratio,  $E_1$  with  $\theta_0$ .


values and decreases with the increase of  $\theta_0$  and attains the minimum value at the grazing angle of incidence. We have observed that the sum of energy ratios is close to unity.

### 9. Conclusion

The problem of reflection and refraction of  $SH$ -waves at the plane interface between the homogeneous fibre-reinforced half-space and the nonhomogeneous fibre-reinforced half-space has been investigated. The amplitude and energy ratios corresponding to the reflected and refracted  $SH$ -waves have

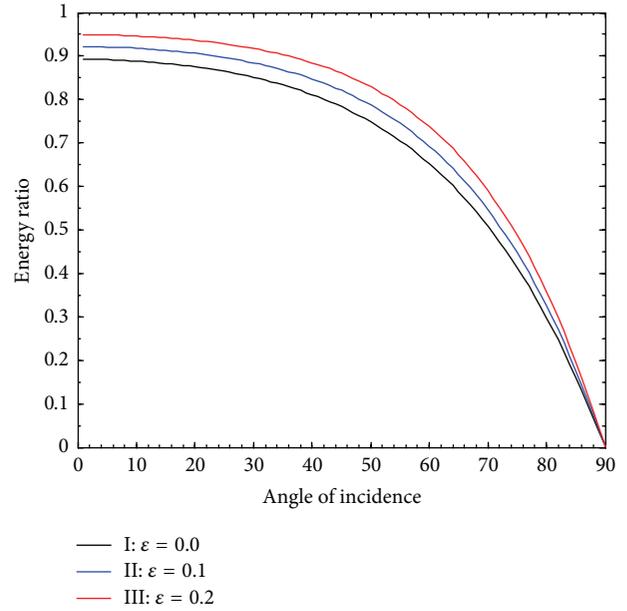

(a) In the presence of reinforcement

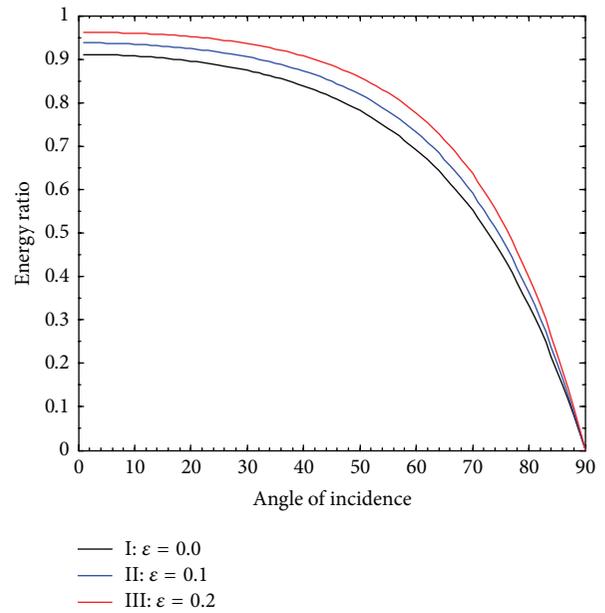

(b) In the absence of reinforcement

FIGURE 5: Variation of the modulus of energy ratio,  $E_2$  with  $\theta_0$ .

been obtained and computed numerically. We may conclude the following points:

- (i) The amplitude and energy ratios corresponding to the reflected and refracted  $SH$ -waves are functions of elastic constants, fibre orientation, inhomogeneity parameter, and angle of incidence.
- (ii) The amplitude ratio,  $A/A_0$ , and energy ratio,  $E_1$ , attain the maximum value at grazing angle of incidence.
- (iii) The values of  $A/A_0$  and  $E_1$  decrease with the increase of  $\epsilon$ .

- (iv) The values of  $A/A_0$  and  $E_1$  with fibre-reinforcement are greater than those values without fibre-reinforcement.
- (v) The values of  $B/A_0$  and  $E_2$  increase with the increase of  $\epsilon$ .
- (vi) The sum of energy ratios is close to unity.

### Conflict of Interests

The authors declare that there is no conflict of interests regarding the publication of this paper.

### Acknowledgment

The author C. Zorammuana acknowledges UGC, New Delhi, for giving financial assistance through Rajiv Gandhi National Fellowship (RGNF) to complete this work.

### References

- [1] A. J. M. Spencer, *Deformations of Fibre-Reinforced Materials*, Clarendon Press, Oxford, UK, 1972.
- [2] A. J. Belfield, T. G. Rogers, and A. J. M. Spencer, "Stress in elastic plates reinforced by fibres lying in concentric circles," *Journal of the Mechanics and Physics of Solids*, vol. 31, no. 1, pp. 25–54, 1983.
- [3] P. R. Sengupta and S. Nath, "Surface waves in fibre-reinforced anisotropic elastic media," *Sadhana*, vol. 26, no. 4, pp. 363–370, 2001.
- [4] A. Chattopadhyay, R. L. K. Venkateswarlu, and S. Saha, "Reflection of quasi-P and quasi-SV waves at the free and rigid boundaries of a fibre-reinforced medium," *Sadhana*, vol. 27, no. 6, pp. 613–630, 2002.
- [5] B. Singh and S. J. Singh, "Reflection of plane waves at the free surface of a fibre-reinforced elastic half-space," *Sadhana*, vol. 29, no. 3, pp. 249–257, 2004.
- [6] B. Singh, "Wave propagation in thermally conducting linear fibre-reinforced composite materials," *Archive of Applied Mechanics*, vol. 12, pp. 1–7, 2006.
- [7] I. A. Abbas, "A two-dimensional problem for a fibre-reinforced anisotropic thermoelastic half-space with energy dissipation," *Sadhana*, vol. 36, no. 3, pp. 411–423, 2011.
- [8] S. S. Singh and C. Zorammuana, "Incident longitudinal wave at a fibre-reinforced thermoelastic half-space," *Journal of Vibration and Control*, vol. 20, no. 12, pp. 1895–1906, 2014.
- [9] B. Gutenberg, "Wave velocities at depths between 50 and 600 kilometres," *Bulletin of the Seismological Society of America*, vol. 43, pp. 223–232, 1953.
- [10] B. Gutenberg, "Effects of low-velocity layers," *Geofisica Pura E Applicata*, vol. 29, no. 1, pp. 1–10, 1954.
- [11] A. Chattopadhyay and A. Keshri, "Generation of G-type seismic waves under initial stress," *Indian Journal of Pure and Applied Mathematics*, vol. 17, no. 8, pp. 1042–1055, 1986.
- [12] S. S. Singh and S. K. Tomar, "Shear waves at a corrugated interface between two dissimilar fiber-reinforced elastic half-spaces," *Journal of Mechanics of Materials and Structures*, vol. 2, no. 1, pp. 167–188, 2007.
- [13] A. Chattopadhyay and A. K. Singh, "G-type seismic waves in fibre reinforced media," *Meccanica*, vol. 47, no. 7, pp. 1775–1785, 2012.
- [14] M. Bath and A. L. Arroyo, "Attenuation and dispersion of G-waves," *Journal of Geophysical Research*, vol. 67, no. 5, pp. 1933–1942, 1962.
- [15] S. Gupta, "Reflection and transmission of SH-waves in laterally and vertically heterogeneous media at an irregular boundary," *Geophysical Transactions*, vol. 33, no. 2, pp. 89–111, 1987.
- [16] S. K. Tomar, R. Kumar, and A. Chopra, "Reflection/refraction of SH waves at a corrugated interface between transversely isotropic and visco-elastic solid half-spaces," *Acta Geophysica Polonica*, vol. 50, no. 2, pp. 231–250, 2002.
- [17] R. Kumar, S. K. Tomar, and A. Chopra, "Reflection/refraction of SH-waves at a corrugated interface between two different anisotropic and vertically heterogeneous elastic solid half-spaces," *The ANZIAM Journal*, vol. 44, no. 3, pp. 447–460, 2003.
- [18] S. Chaudhary, V. P. Kaushik, and S. K. Tomar, "Reflection/transmission of plane SH-wave through a self-reinforced elastic layer between two half-spaces," *Acta Geophysica Polonica*, vol. 52, no. 2, pp. 219–235, 2004.
- [19] S. Chaudhary, V. P. Kaushik, and S. K. Tomar, "Plane SH-wave response from elastic slab interposed between two different self-reinforced elastic solids," *International Journal of Applied Mechanics and Engineering*, vol. 11, no. 4, pp. 787–801, 2006.
- [20] V. F. Emets, Y. I. Kunets, and V. V. Matus, "Scattering of SH waves by an elastic thin-walled rigidly supported inclusion," *Archive of Applied Mechanics*, vol. 73, no. 11–12, pp. 769–780, 2004.
- [21] A. Chattopadhyay and V. Michel, "A model for spherical SH wave propagation in self-reinforced linearly elastic media," *Archive of Applied Mechanics*, vol. 75, no. 2–3, pp. 113–124, 2006.
- [22] S. K. Tomar and S. S. Singh, "Plane SH-waves at a corrugated interface between two dissimilar perfectly conducting self-reinforced elastic half-spaces," *International Journal for Numerical and Analytical Methods in Geomechanics*, vol. 30, no. 6, pp. 455–487, 2006.
- [23] S. K. Tomar and J. Kaur, "Reflection and transmission of SH-waves at a corrugated interface between two laterally and vertically heterogeneous anisotropic elastic solid half-spaces," *Earth, Planets and Space*, vol. 55, no. 9, pp. 531–547, 2003.
- [24] S. K. Tomar and J. Kaur, "SH-waves at a corrugated interface between a dry sandy half-space and an anisotropic elastic half-space," *Acta Mechanica*, vol. 190, no. 1–4, pp. 1–28, 2007.
- [25] A.-E. N. Abd-Alla and F. A. Alsheikh, "Reflection and refraction of plane quasi-longitudinal waves at an interface of two piezoelectric media under initial stresses," *Archive of Applied Mechanics*, vol. 79, no. 9, pp. 843–857, 2009.
- [26] A. Chattopadhyay, S. Gupta, V. K. Sharma, and P. Kumari, "Propagation of G-type seismic waves in viscoelastic medium," *International Journal of Applied Mathematics and Mechanics*, vol. 6, no. 9, pp. 63–75, 2010.
- [27] S. S. Singh, "Response of shear wave from a corrugated interface between elastic solid/viscoelastic half-spaces," *International Journal for Numerical and Analytical Methods in Geomechanics*, vol. 35, no. 5, pp. 529–543, 2011.
- [28] H. M. Wang and Z. C. Zhao, "Love waves in a two-layered piezoelectric/elastic composite plate with an imperfect interface," *Archive of Applied Mechanics*, vol. 83, no. 1, pp. 43–51, 2013.
- [29] S. A. Sahu, P. K. Saroj, and N. Dewangan, "SH-waves in viscoelastic heterogeneous layer over half-space with self-weight," *Archive of Applied Mechanics*, vol. 84, no. 2, pp. 235–245, 2014.
- [30] J. D. Achenbach, *Wave Propagation in Elastic Solids*, North-Holland, Amsterdam, The Netherlands, 1976.



**Hindawi**

Submit your manuscripts at  
<http://www.hindawi.com>

