

Review Article

A Comprehensive Review of Mathematical Modeling for Drying Processes of Fruits and Vegetables

Ferdusee Akter ^{1,2}, Ripa Muhury ¹, Afroza Sultana,³ and Ujjwal Kumar Deb ¹

¹Department of Mathematics, Chittagong University of Engineering & Technology, Chattogram 4349, Bangladesh

²Department of Physical and Mathematical Sciences, Chittagong Veterinary and Animal Sciences University, Chattogram 4225, Bangladesh

³Department of Food Processing and Engineering, Chittagong Veterinary and Animal Sciences University, Chattogram 4225, Bangladesh

Correspondence should be addressed to Ferdusee Akter; imferdusee@cvasu.ac.bd

Received 10 February 2022; Revised 26 June 2022; Accepted 11 July 2022; Published 21 July 2022

Academic Editor: Eduard Hernández

Copyright © 2022 Ferdusee Akter et al. This is an open access article distributed under the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Drying fruits and vegetables is a procedure of food preservation with simultaneous heat, mass, and momentum transfer, which increases the shelf life of the food product. The aim of this review was to provide an overview of the researches on mathematical modeling for drying of fruits and vegetables with the special emphasis on the computational approach. Various heat-mass transport models, their applications, and modern drying technologies to the food industry have been reported in this study. Computational fluid dynamics, a new approach for solving heat and mass transfer problems, increases the accuracy of the predicted values. To investigate the parameters of drying needs a significant amount of time as well as costly laboratory and experimental efforts. Therefore, computational modeling could be an effective alternative to experimental approaches. This review will be beneficial for future studies in drying processes, especially for modeling, analysis, design, and optimization of food science and food engineering.

1. Introduction

Micronutrient rich fruits and vegetables may assist to overcome malnutrition of individuals. In addition, they are rich in unsaturated fat, dietary fiber, and phytochemicals that are beneficial to health [1]. It is estimated that one-third of the world's food supply is lost owing to poor post-harvest processing practices every year [2]. In underdeveloped nations, such as Bangladesh, this loss is believed to be between 30 and 40 percent of the production [3]. This is seen as a major source of nutritional and economic harm for both individual countries and the whole planet. Because of this, it is essential to investigate and find the best techniques of food processing and preservation in order to reduce food losses [1].

Produce changes seasonally; so, it is impossible to have year-round access to a wide variety of fruits and vegetables. As a result, many procedures have been implemented in

order to provide consumers with an alternate method of consuming and applying food [4]. Because of this, processing and preservation are essential in the fruit and vegetable supply cycle because they link agricultural output to the delivery of required [5].

When it comes to fruit and vegetable preservation, drying is the most common unit activity. Bacteria and mold thrive in fruit because of the high water content, which makes them ideal for growing. Remove the moisture from the food and prevent the formation of bacteria by drying the food [6, 7]. For the preservation of fruits and vegetables, hot air drying is the most often used drying technique. More than 85% of all industrial dryers are convective dryers, which use hot air or combustion gases to transfer heat [8]. It is common for dried food to have less than 25% water content and a water activity of less than 0.06 [9, 10]. Food drying may enhance storage capacity, reduce production needs, and decrease the weight and transportation costs of food

[11]. The drying process not only helps to preserve the product but also has the potential to improve the overall quality of the materials and to produce value-added compounds. Moreover, a novel method or one that combines existing methods is required to ensure the excellent quality of the dried items [12–14]. The improved technologies diminish energy consumption by as much as 80% and improve drying efficiency by as much as 26.5% in terms of reduction in drying time [15]. In addition to this, the idea of quality needs to include both the energy efficiency and the effect that making sustainable dry goods has on the environment [13]. In order to simulate and verify the drying process, it is important to employ mathematical models. Through the use of virtual laboratories, it is possible to achieve results that would be impossible or impractical to obtain at the conceptual stage of research [16]. Mathematical modeling in food drying is the use of mathematical equations to predict the drying process's behavior [17]. Drying air velocity and temperature both have a significant impact on the drying rate, and the rate of evaporation may slow down as a result of moving the products. For quality and storage safety reasons, it was important to keep the air temperature low at the beginning and end of the process [18–20]. Mathematical models are helpful in optimizing the drying conditions and studying complicated heat and mass transport processes. Furthermore, drying conditions and simulation model parameters are linked. Experimental error is reduced due to the drying model, and the drying process is enhanced while energy consumption is reduced and profit margins are increased as a result [21, 22]. The goal of this study was to shed light on mathematical modeling and how it might be used to speed up the drying process for fresh produce. An investigation of fruit and vegetable drying model possibilities and future prospects was conducted. Future researchers in food science and food engineering will benefit from this study, especially those working on fruit and vegetable drying models, analyses, designs, and optimizations.

2. Main Text

2.1. Drying Process. The drying of fruits and vegetables is a sophisticated process that includes interconnected transitory processes of heat, mass, and momentum transfer, as well as physical, chemical, and phase changes [23]. There are two drying regimes when food items are heated, as indicated in Figure 1. Phase I begins with the evaporation of surface moisture. This process continues until enough water is available at the surface to warrant evaporation. Surface area and temperature are both important in phase I because they affect the reaction's first phase. However, phase II is all about the transport of moisture from the inside to the outside and the subsequent evaporation of that water. For a short time, there is a slowdown in drying, and it is done when there is an equal amount of air and solid vapor pressure in the surrounding air [24].

2.2. Classification of Fruits and Vegetables Drying Model. There were two scales used in the mathematical models, a macroscale (10^{-3} – 10^0 m) model and a microscale (10^{-6} – 10^{-3} m) model.

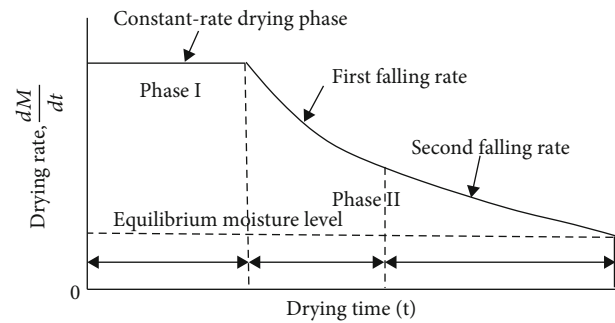


FIGURE 1: Drying rate curve [24].

A multiscale model is a model that incorporates both of these features [25–27]. Microscale models provide more accurate predictions of transport processes and deformation in food material throughout the drying process than macroscale models do at the cellular level [26]. Process design, optimization, energy integration, and control are all made possible via the use of effective models. As a result, the mathematical models and their applications in forecasting the drying kinetics of food should be developed and refined on a daily basis [16, 28]. The classification of food drying models is shown in Figure 2.

2.3. Theoretical Models and Their Applications. In physical-based modeling, theoretical models of the drying process are determined by mathematical deduction. In this section, we build a boundary value problem by taking into account the governing equations of transport phenomena, assumptions, and starting and boundary conditions. The boundary value issue is then solved analytically or numerically, and the results are compared to those obtained experimentally. Increase the drying temperature from 313 to 353 degrees Celsius, and you will save around 40% of the drying time, according to research [32]. Furthermore, with constant and varied surface transfer coefficients, the distribution of moisture did not change any more than before [33]. Tables 1 and Tables 2 provide the governing equations and boundary conditions, respectively, which are utilized in the food sector for modeling to dry products and ingredients.

Even in the absence of experimental evidence, a physics-based model accurately predicts the occurrence of physical phenomena. A variety of theoretical models, as well as their implementations on diverse fruits and vegetables, are shown in Table 3.

2.4. Solution Processes of the Theoretical Model. Analytical and numerical methods can be used to solve the partial differential equations. The governing equations of the drying processes are complex, and so it is difficult to find the solution both analytically and numerically. Therefore, we must make assumptions to simplify the mathematical model so that it can be solved for an exact or numerical solution, but the analytical technique is most commonly employed to solve the uncoupled mass transfer equation in one dimension. The governing equations are rewritten using the separation of variables approach and dimensionless Fourier and Biot variables [46].

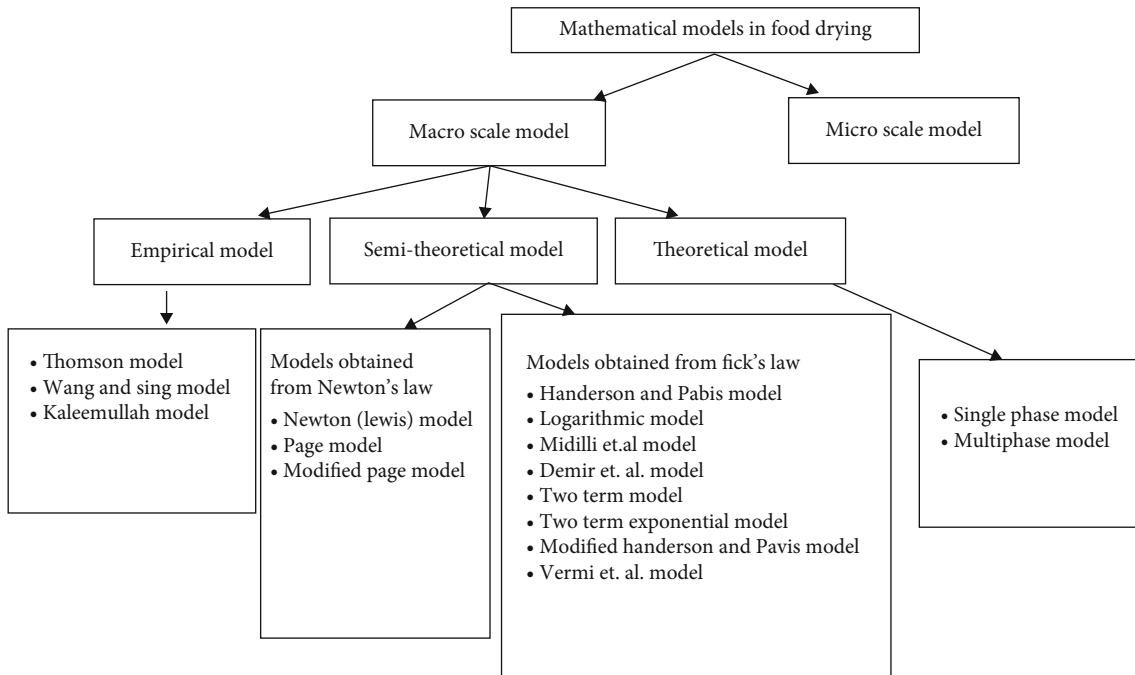


FIGURE 2: Classification of mathematical models in food drying [6, 26, 29–31].

TABLE 1: Transport equations during drying of fruits and vegetables.

Model type	Governing equations	References
Macroscale	Heat transfer equations	
	1. $\rho c_p(\partial T/\partial t) + \rho c_p \nabla T = (k \nabla T) + Q_{inf}$	[12]
	2. $\rho c_p(\partial T/\partial t) = \nabla \cdot (k \nabla T)$	[18, 34–36]
	3. $\rho C_p(\partial T/\partial t) + \nabla \cdot (-k \nabla T) + \rho C_p u \cdot \nabla T = 0$	[23, 33]
	4. $\rho(T)c_p(T)(\partial T/\partial t) = (\partial/\partial x)(k(T)(\partial T/\partial x)) + (\partial/\partial y)(k(T)(\partial T/\partial y)) + (\partial/\partial z)(k(T)(\partial T/\partial z))$	[37]
	(5) $\partial(\rho c_p T)/\partial t = 1/r\{(\partial/\partial r)(k r(\partial T/\partial r)) + (\partial/\partial z)(k r(\partial T/\partial z))\}$	[38]
	Mass transfer equations	
	6. $(\partial c/\partial t) + \nabla \cdot (-D_{eff} \nabla c) = 0$	[12, 35]
	7. $\partial c/\partial t = \nabla \cdot (D \nabla c)$	[33, 34]
	8. $\partial(\rho c)/\partial t = 1/r\{(\partial/\partial r)(D_{eff} \rho r(\partial c/\partial r)) + (\partial/\partial z)(D_{eff} \rho r(\partial c/\partial z))\}$	[38]
9. $\partial c/\partial t = D(1/r(\partial/\partial r)(r(\partial c/\partial r))) + D(1/r(\partial^2 c/\partial \phi^2)) + D(\partial^2 c/\partial z^2)$ $r_i \leq r \leq r_0; 0 \leq \phi \leq 2\pi; 0 \leq z \leq 1$	[39]	
10. $(\partial c/\partial t) + \nabla \cdot (-D \nabla c) + u \cdot \nabla c = 0$	[23, 40]	
Microscale	Heat transfer equation	
	11. $\rho_c c_{pc}(\partial T/\partial t) + \rho_c c_{pc} \nabla T = \nabla \cdot (k_w \nabla T)$	[41]
	Mass transfer equation	
	12. $(\partial c/\partial t) + \nabla \cdot (D_c \nabla c) = 0$	[41]

Moreover, fruits and vegetables are naturally three-dimensional, and hence three-dimensional modeling provides a more accurate representation. Numerous types of studies have been published during the previous decades; although, the majority of models are two-dimensional. The primary benefit of the two-dimensional model is that it can be implemented with more precision and at a lower cost of computing [26]. At the moment, the three most often uti-

lized techniques for discovering high-accuracy approximation solutions to transport phenomena are finite difference, finite volume, and finite element methods [28, 43].

The finite difference approach can only be used to solve issues with simple geometrical structures. The differential terms are decomposed into discrete representations via domain discretization on a rectangular grid for the finite differences. Due to the variable geometry of fruits and

TABLE 2: Initial and boundary conditions.

Transport phenomena	Initial and boundary equations	Transfer mechanism	References
Heat and mass at $t = 0$	$T = T_0$ $c = c_0$	—	[18, 38, 41–43]
Heat	$n \cdot (k\nabla T) = h_T (T_a - T_s)$	Convection	[33]
Heat and mass	$n \cdot (k\nabla T) = h_T (T_a - T_s) - h_m \rho (M - M_e) h_{fg}$	Convection, conduction, and diffusion	[12, 23, 37]
Mass transfer	$n \cdot (D\nabla c) = h_m (c_b - c)$	Diffusion	[18, 33, 39]
Heat transfer at the symmetry/insulated boundary	$n \cdot (k\nabla T) = 0$	Convection	[12, 23, 42]
Mass transfer at the symmetry/insulated boundary	$n \cdot (D\nabla c) = 0$	Diffusion	[12, 23, 42]
Mass transfer cell to cell	$n \cdot (D_w \nabla c) = h_{\text{wall}} (c_{\text{mi}} - c_i)$	Diffusion	[41]
Mass transfer cell to intracellular space	$n \cdot (D_w \nabla c) = h_{\text{wall}} (c_{\text{mi}} - c_a)$	Diffusion	[41]

vegetables, this approach is typically used in rectangular areas, which restricts its usefulness [47].

One of the most common numerical methods is the finite volume method. A variety of polyhedra, some of which are not regular grids, are generated as a result of this method of discretizing the domain. In comparison to the finite-difference technique, the usage of polyhedron grids with integral approximations has several advantages. It supports various domain geometries, making it easier to use in multiple dimensions [48].

The finite element approach is more adaptable and broad. Besides, the approximation approach differs from that of the finite volume method. The weak formulation of the model is required for algorithm creation. Test functions must also be used in order to apply the Gauss theorem, which is typically connected with mass, energy, and momentum conservation rules. The finite element method gives a better approximation than other methods for complex geometries. So, the finite element method is the one most applied by researchers [49, 50]. Numerous software programs utilize numerical methods to solve mathematical models, and the answer is referred to as numerical simulations.

2.4.1. Computational Approach. Computational fluid dynamics (CFD) is currently a critical instrument for solving issues in science, engineering, and the food business, and it is the most widely used and well-known modeling approach based on numerical methods (Figure 3). Through CFD simulation, it is possible to predict the transport phenomena during the drying process, the nutritional value, and food processing and storage conditions, reducing the need for trial and error in experimental techniques [51].

CFD analysis relies heavily on mesh creation. In the past few years, meshing technology has come a long way, and the use of tetrahedral, hexahedral hybrid, and polyhedral meshes has helped get around the problems with simpler meshes [52].

A number of commercial CFD software such as COMSOL, ANSYS, MATLAB, and FORTRAN, among others, are widely used to simulate the model of drying processes

[23, 43, 53, 54]. Employing response surface methodology (RSM), the drying behavior of fruits and vegetables, was optimized and different process factors were studied [55–58]. An understanding of the transport phenomena that take place during drying as well as better management of the drying process is possible via the use of these approaches [59]. Simulation procedure of the drying process using COMSOL Multiphysics is shown in Figure 4.

2.5. New Technologies of Modeling Fruits and Vegetables Drying. The artificial neural network (ANN) is a new way of modeling in the food industry that is very important to the development of new technologies. An artificial neural network is made up of a huge number of interconnected processing units. There are three layers in an ANN: input, hidden, and output. Neurons or nodes make up the bulk of an ANN's structure (Figure 5). Problems that standard statistical and mathematics approaches fail to solve can be solved with the nonlinear statistical methodology known as artificial neural networks [60].

Medical and technical fields alike may benefit from ANN's data-driven power. There are several applications for this in food processing such as the processing of fruits like mango, banana, and pomegranate, as well as the processing of berries like mulberry and strawberry, as well as dates [61, 62]. The drying kinetics are properly predicted by the ANN model [63]. Furthermore, there have been studies using this technique for modeling the color and phenolic content of apples as well as the antioxidant activity of bananas [64, 65]. The antioxidant activity and phenolic components of bananas under various drying processes were modeled using an artificial neural network by Guine et al. [65]. In comparison to other fresh fruits, bananas in the dry source were shown to have lower concentrations of phenolic compounds and antioxidant activity. They used basic ANNs to show that the quantities of phenolic compounds and antioxidant activity may be projected with high accuracy from the drying condition, banana variety, and the specific kind. Onwude et al. found that the ANN model is able to provide more accurate results about the drying process of pumpkin in comparison to other kinetic models. Moreover,

TABLE 3: Applications of theoretical models.

Material name	Geometry	Drying method	Outcomes
Sweet potato [12]	Cylindrical shaped, 2D axisymmetric	Infrared drying	The moisture content was found to be susceptible to a low and high effective diffusion value. Infrared drying alone has a number of drawbacks, which could be overcome by combining infrared heating with other drying techniques.
Papaya [37]	Rectangular shape	Convective drying	This model gives a better output of the phenomena inside the sample. It is reported that the moisture content is nonuniform in the fruit sample and differs in each location. The authors also observed that 3D models would be better than the 2D models in agreement with the experimental data.
Mango [35]	Mango slab 3D modeling	Solar drying	To solve the simultaneous heat and mass transport problem on the surface area of food drying, a simple numerical technique has been presented here in this paper. The approach relies on the water activity that was created from experimental data.
Sultana grapes [34]	Solid spherical	Computer controlled drying system	The kinetic model predicts the development of color in the product at each node during the drying process, whose response rate depends on the temperature and moisture content of the product, thereby coupling the changes in product color with local heat and mass transfer predictions. This involves separating excellent fruit from stems, cap, stems, gravel, and other foreign materials. Further processing can cause damage to the fruit's skin, allowing sugar to escape, making the fruit sticky.
Banana [38]	Cylindrical	Computer controlled dryer	The arbitrary Lagrangian-Eulerian (ALE) approach was implemented to incorporate the axial and radial shrinkage effects into the finite element model (FEM) model.
Mushroom [36]	2D axis symmetric	Cabinet air drying	A finite element model was developed to examine the temperature and moisture profiles inside the mushroom by including the phase shift during mushroom dehydration in a cabinet-air-dryer. To improve the transport process predictions, the model incorporates a variety of parameters, including heat transfer coefficient and mass transfer coefficient as well as the mushroom's water activity and specific heat.
Pineapple [42]	Rectangular 2D axisymmetric	Tray dryer	A comparison between the average volume of the test and the expected moisture ratio values for all drying settings was analyzed in this paper. These models are capable of predicting a suitable pattern for the moisture concentration profile.
Tomato slices [44]	Rectangular 2D axisymmetric	Tunnel dryer	According to this study, increased temperature and speed of air can also shorten drying time. Comparing the theoretical and experimental drying kinetics, the root mean square error is found to be about 8 percent.
Apple slice [18]	Square shape	Hot-air drying	To predict the hot-air drying process of apple slices, a heat-mass transfer combined with a stress-strain mathematical model was employed. The image processing technology was utilized to measure the drying shrinkage deformation of apple slices. Apple slices were more susceptible to drying shrinkage deformation due to moisture stress than thermal stress. The observed result was that moisture stress had a stronger influence on drying shrinkage deformation.
Apple [45]	Slab cylindrical	Intermittent microwave convective (IMCD) drying	The drying process of IMCD is significantly faster than the drying of convection. The essential basis of the model allows us to better understand the drying kinetics and the IMCD heat and mass transfer.
Pineapple [39]	3D ring shape	Laboratory scale hot air drying	The moisture characteristics are substantially influenced by the deformation that occurs during shrinking. As a result, when building a food drying model, shrinkage should not be overlooked.
Prune [23]		Convective air drying	The author found a good agreement with the predicted and experimental values of drying data with the coupled heat, mass, and momentum transfer model. It is hoped that this model would be used for other food processes and food products with related phenomena.
Granny smith apple [41]	Microscale	Convective drying	The temperature distribution was also predicted effectively in the cells and intercellular spaces. During drying, it was observed that the air-filled intercellular spaces were heated more rapidly than the cells.

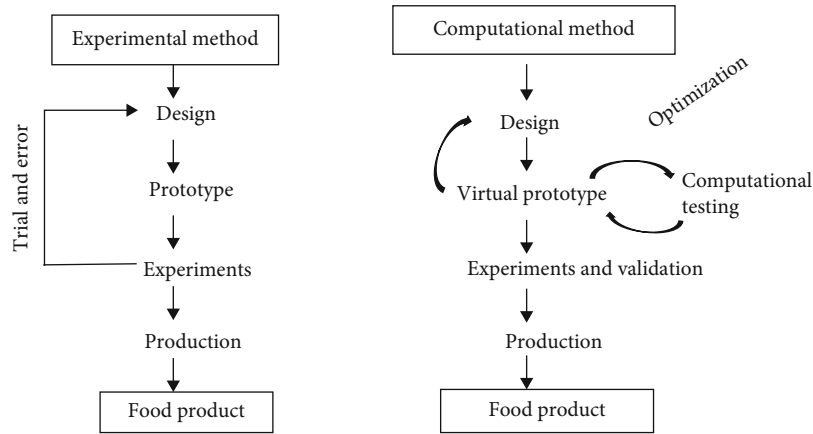


FIGURE 3: Experimental and computational methods applied to food product [51].

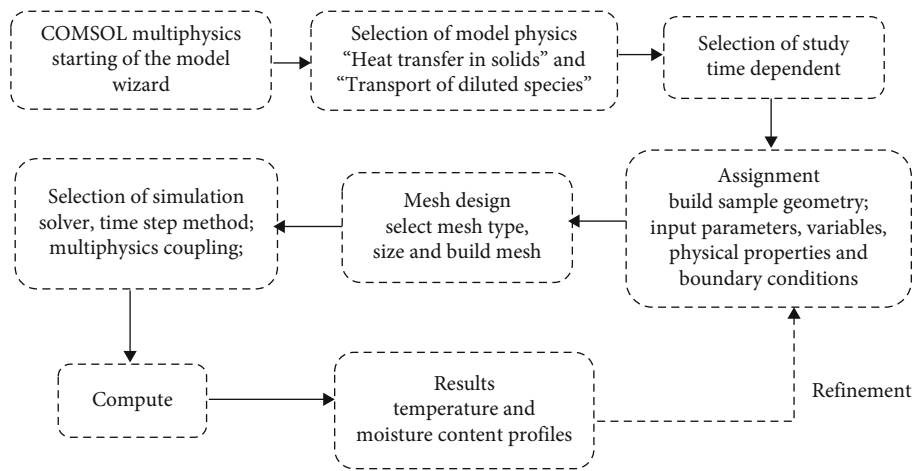


FIGURE 4: Flow chart for implementation of the coupled heat and mass transfer model and simulation procedure using COMSOL [12, 39].

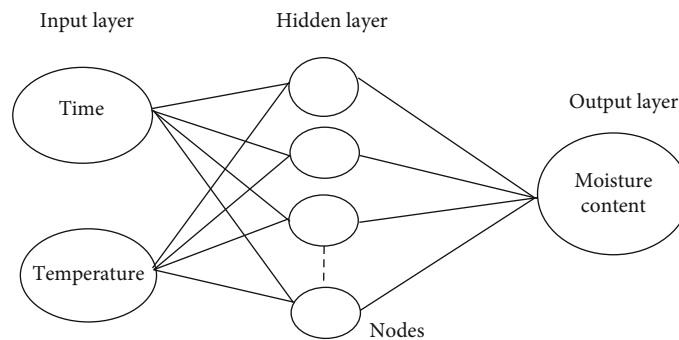


FIGURE 5: ANN structure [61].

it is able to produce better outcomes even if the experimental settings and data sets are modified as a consequence of the incorporation of more experimental data [66].

Conventional drying techniques include sun drying, solar drying, hot air drying, spray drying, freeze drying, and vacuum drying. Sun drying uses heat energy directly from the sun, and a temperature of at least 86°F is required, with higher temperatures preferred. Sun drying might be risky due to the uncontrollable nature of the weather. Sun

drying works best when the relative humidity is less than 60% [67]. On the other hand, foods may be dried using the heat energy from the sun in a particular dehydrator in a controlled way that not only raises the temperature but also enhances the airflow. This is known as solar drying. Many food drying applications can be completed successfully at temperatures below 60°C without risk of thermal damage. Because temperatures beyond 60°C are rarely attained in small-scale drying facilities, solar drying prevents exposing

the food material to too high temperatures. This method speeds the drying process and lowers the chance of mold or spoilage in the food [67, 68]. Drying with hot air has several benefits, including a long shelf life, an easy design and operation, a low cost, and a simple cost structure, but it takes a long time to complete. Spray drying results in a product that is both excellent quality and has a low moisture content. It is utilized in the microencapsulation process, as well as the creation of powder, and instant powder but the installation cost is high. Freeze drying eliminates oxidation damage, minimizes changes to chemical components, reduces shrinkage, keeps the porosity structure of food, and is a very costly method [13].

Novel drying methods include microwave, infrared, radiofrequency, osmotic, supercritical, pulse electric field, and heat pump drying. Improved drying efficiency and product quality may be achieved by using these methods. There has been a slew of different drying approaches investigated in tandem. There are many ways to combine convection and microwaves, convection and osmotic dehydration, convection and infrared radiation, convection and ultraviolet radiation, and many other combinations [13, 61, 67, 69]. Drying in combination seems to be the most promising strategy, since it ensures high quality while using the least amount of energy. There is still room for improvement in the drying process, though. Food items with high health-promoting characteristics and attractive sensory features will be fortified with additional treatments to promote water diffusivity and retention of important chemicals [4]. The capacity to minimize costs, be environmentally friendly, and assure the great quality of the dried objects are the most significant factors [13].

2.6. Recommendations for Future Research. The enhancements of some models could be done in the upcoming years:

- (i) 3D modeling of fruits and vegetables
- (ii) Give emphasize on microscale modeling and multiscale modeling
- (iii) Optimization of the process conditions
- (iv) Future research in the food drying model would consider new approaches such as multiphase models at the cellular level, multiphase multiscale models, transport models considering intracellular, and intercellular water separately [26]
- (v) The application of deep learning and neurofuzzy system-based models in food processing research [62]
- (vi) Future research on organic foods in comparison to conventional products is required due to the growing demand for organic products [70]

As a consequence, it is needed to establish a relationship between process conditions, food structure, and product quality by researchers and specialists from different fields using their knowledge and resources.

3. Conclusions

Drying fruits and vegetables is a time-consuming and energy-intensive procedure that demands a great deal of energy and time. It extends the shelf life of the product while reducing its bulk and weight, which simplifies shipping. Dried foods are palatable, healthy, light, and convenient to transport. Modeling is a novel technique for evaluating experimental data that has gained prominence in recent years. Several forms of theoretical models with application to various fruits and vegetables and the methods of solution were discussed in this paper. Fluid flow, heat transfer, and product quality may all be predicted using CFD in a variety of drying systems. It is possible to overcome some of the disadvantages of macrobased modeling by using new tools and methodologies, such as multiscale or micromodeling. Moreover, the ANN model can properly predict the drying kinetics, color changes, phenolic compounds, and antioxidant properties in various drying processes. Conventional methods are less expensive, easier to use, and take longer drying time. However, novel drying techniques ensure the quality of food using low energy consumption. There are advantages and disadvantages to each process, but the most important for a newly developed technology is the ability to minimize costs, be ecofriendly, and provide excellent functional, physical, and sensory quality in the dried items. The models discussed here might readily be extended to other agricultural products with complicated structures and comparable heat and mass transfer processes, such as cooking, frying, or roasting. Environmentally friendly technology is becoming more prevalent in today's society, and every advancement in this field is highly commended. These breakthroughs need a tremendous amount of time and money spent in laboratories and on experiments. Mathematical models and computer simulation tools might be used in place of experimental procedures with success.

Abbreviations

ALE:	Arbitrary Lagrangian-Eulerian
ANN:	Artificial neural network
CFD:	Computational fluid dynamics
FEM:	Finite element method
IMCD:	Intermittent microwave convective drying
c :	Moisture concentration (mol/m^3)
c_b :	Bulk moisture concentration (mol/m^3)
c_i :	Water concentration of the adjacent cell (mol/m^3)
c_{mi} :	Water concentration of the cell (mol/m^3)
c_p :	Specific heat capacity of material ($\text{J}/\text{kg}^{-1} \text{K}^{-1}$)
D :	Moisture diffusivity (m^2/s)
D_{cw} :	Diffusivity of the cell wall
h_{fg} :	Latent heat of evaporation (J/kg)
h_m :	Mass transfer coefficient (m/s)
h_T :	Heat transfer coefficient ($\text{W}/\text{m}^2 \text{K}^{-1}$)
h_{wall} :	Water transfer coefficient of the cell wall (m/s)
k :	Thermal conductivity ($\text{W}/\text{m}^{-1} \text{K}^{-1}$)
k_w :	Thermal conductivity of cellular water ($\text{W}/\text{m}^{-1} \text{K}^{-1}$)
p :	Pressure (Pa)
T :	Drying temperature ($^{\circ}\text{C}$)

t : Drying time (s)
 T_s : Sample surface temperature ($^{\circ}\text{C}$)
 Q_{inf} : Volumetric infrared heat source
 ρ : Density of the sample (kg/m^3)
 M : Moisture content (kg/kg) db.

Subscripts

0: Initial
 c : cell
 e_{ff} : Food effective property.

Conflicts of Interest

The authors state that they have no conflicting financial interests or personal relations that may have seemed to affect the work presented herein.

Acknowledgments

The first author gratefully acknowledges the Ministry of Science and Technology, Bangladesh, for the grant “NST Fellowship for PhD students” awarded for her doctoral studies.

References

- [1] B. T. Kiremire, E. Musinguzi, J. K. Kikafunda, and F. B. Lukwago, “Effects of vegetable drying techniques on nutrient content: a case study of South-Western Uganda,” *African Journal of Food, Agriculture, Nutrition and Development*, vol. 10, no. 5, pp. 2587–2600, 2010.
- [2] J. Gustavsson, C. Cederberg, and U. Sonesson, *Global Food losses and food waste: Causes and solutions*, FAO Rome, Italy, 2011.
- [3] M. A. Karim and M. N. A. Hawlader, “Mathematical modelling and experimental investigation of tropical fruits drying,” *International Journal of Heat and Mass Transfer*, vol. 48, no. 23–24, pp. 4914–4925, 2005.
- [4] A. Figiel and A. Michalska, “Overall quality of fruits and vegetables products affected by the drying processes with the assistance of vacuum-microwaves,” *International Journal of Molecular Sciences*, vol. 18, no. 1, 2017.
- [5] J. L. Johnston, J. C. Fanzo, and B. Cogill, “Understanding sustainable diets: a descriptive analysis of the determinants and processes that influence diets and their impact on health, food security, and environmental sustainability,” *Advances in Nutrition*, vol. 5, no. 4, pp. 418–429, 2014.
- [6] Z. Erbay and F. Icier, “A review of thin layer drying of foods: theory, modeling, and experimental results,” *Critical Reviews in Food Science and Nutrition*, vol. 50, no. 5, pp. 441–464, 2010.
- [7] R. Golestani, A. Raisi, R. Golestani, A. Raisi, and A. Aroujalian, “Mathematical modeling on air drying of apples considering shrinkage and variable diffusion coefficient,” *Drying Technology*, vol. 31, no. 1, pp. 40–51, 2013.
- [8] J. A. Moses and F. D. Authority, “Novel drying techniques for the food industry,” *Food Engineering Reviews*, vol. 6, no. 3, pp. 43–55, 2014.
- [9] M. D. Alur and V. Venugopal, “Dried Foods,” in *Encyclopedia of Food Microbiology*, pp. 530–537, 1999.
- [10] J. M. Jay, M. J. Loessner, and D. A. Golden, “Protection of foods by drying,” in *Modern Food Microbiology*, pp. 443–456, Springer, 2005.
- [11] M. M. Rahman, A. G. M. B. Mustayen, S. Mekhilef, and R. Saidur, “The optimization of solar drying of grain by using a genetic algorithm,” *International Journal of Green Energy*, vol. 12, no. 12, pp. 1222–1231, 2015.
- [12] D. I. Onwude, N. Hashim, K. Abdan, R. Janius, and G. Chen, “Numerical modeling of radiative heat and mass transfer for sweet potato during drying,” *Journal of Food Processing & Preservation*, vol. 42, no. 10, pp. 1–14, 2018.
- [13] A. Calín-Sánchez, L. Lipan, M. Cano-Lamadrid et al., “Comparison of traditional and novel drying techniques and its effect on quality of fruits, vegetables and aromatic herbs,” *Foods*, vol. 9, no. 9, pp. 1–27, 2020.
- [14] T. Varzakas and C. Tzia, *Handbook of food processing: food preservation*, CRC Press, 2015.
- [15] K. Chojnacka, K. Mikula, G. Izydorczyk et al., “Improvements in drying technologies - Efficient solutions for cleaner production with higher energy efficiency and reduced emission,” *Journal of Cleaner Production*, vol. 320, article 128706, 2021.
- [16] H. T. Sabarez, *Modelling of drying processes for food materials*, Elsevier Ltd., 2016.
- [17] W. Wang, G. Chen, and A. S. Mujumdar, “Physical interpretation of solids drying: an overview on mathematical modeling research,” *Drying Technology*, vol. 25, no. 4, pp. 659–668, 2007.
- [18] Y. Yuan, L. Tan, Y. Xu, Y. Yuan, and J. Dong, “Numerical and experimental study on drying shrinkage-deformation of apple slices during process of heat-mass transfer,” *International Journal of Thermal Sciences*, vol. 136, pp. 539–548, 2019.
- [19] Y. Pei, Z. Li, C. Song, J. Li, W. Xu, and G. Zhu, “Analysis and modelling of temperature and moisture gradient for ginger slices in hot air drying,” *Journal of Food Engineering*, vol. 323, article 111009, 2022.
- [20] S. Ö. Çoban, F. Selimefendigil, and H. F. Öztop, “3D numerical study of heat and mass transfer of moving porous moist objects,” *Thermal Science and Engineering Progress*, vol. 24, article 100939, 2022 pages, 2021.
- [21] M. Sahoo, S. Titikshya, P. Aradwad, V. Kumar, and S. N. Naik, “Study of the drying behaviour and color kinetics of convective drying of yam (*Dioscorea hispida*) slices,” *Industrial Crops and Products*, vol. 176, article 114258, 2022.
- [22] F. H. Cosme-De Vera, A. N. Soriano, N. P. Dugos, and R. V. C. Rubi, “A comprehensive review on the drying kinetics of common tubers,” *Applied Science and Engineering Progress*, vol. 14, no. 2, pp. 146–155, 2021.
- [23] H. T. Sabarez, “Computational modelling of the transport phenomena occurring during convective drying of prunes,” *Journal of Food Engineering*, vol. 111, no. 2, pp. 279–288, 2012.
- [24] A. Sayigh, *Renewable Energy and Sustainable Buildings: Selected Papers from the World Renewable Energy Congress WREC 2018*, Springer Nature, 2019.
- [25] Q. T. Ho, J. Carmeliet, A. K. Datta et al., “Multiscale modeling in food engineering,” *Journal of Food Engineering*, vol. 114, no. 3, pp. 279–291, 2013.
- [26] M. M. Rahman, *Microscale Modeling of Cellular Level Transport and Deformation during Food Drying*, [Ph.D. thesis], Queensland University of Technology, 2018.
- [27] Z. Welsh, M. J. Simpson, M. I. H. Khan, and M. A. Karim, “Multiscale modeling for food drying: state of the art,”

- Comprehensive Reviews in Food Science and Food Safety*, vol. 17, no. 5, pp. 1293–1308, 2018.
- [28] A. M. Castro, E. Y. Mayorga, and F. L. Moreno, “Mathematical modelling of convective drying of fruits: a review,” *Journal of Food Engineering*, vol. 223, pp. 152–167, 2018.
- [29] U. E. Inyang, I. O. Oboh, and B. R. Etuk, “Kinetic Models for Drying Techniques—Food Materials,” *Advances in Chemical Engineering and Science*, vol. 8, no. 2, pp. 27–48, 2018.
- [30] T. L. Thompson, R. M. Peart, and G. H. Foster, “Mathematical simulation of corn drying a new model,” *Transactions of ASAE*, vol. 11, no. 4, pp. 0582–0586, 1968.
- [31] S. Kaleemullah and R. Kailappan, “Modelling of thin-layer drying kinetics of red chillies,” *Journal of Food Engineering*, vol. 76, no. 4, pp. 531–537, 2006.
- [32] V. P. C. Mohan and P. Talukdar, “Three dimensional numerical modeling of simultaneous heat and moisture transfer in a moist object subjected to convective drying,” *International Journal of Heat and Mass Transfer*, vol. 53, no. 21–22, pp. 4638–4650, 2010.
- [33] V. P. Chandramohan, “Numerical prediction and analysis of surface transfer coefficients on moist object during heat and mass transfer application,” *Heat Transfer Engineering*, vol. 37, no. 1, pp. 53–63, 2016.
- [34] H. T. Sabarez, “Mathematical modeling of the coupled transport phenomena and color development: finish drying of trellis-dried sultanas,” *Drying Technology*, vol. 32, no. 5, pp. 578–589, 2014.
- [35] H. Ambarita and A. H. Nasution, “A numerical solution to simultaneous heat and mass transfer of convective drying of food,” *Journal of Physics: Conference Series*, vol. 1116, no. 3, article 032002, 2018.
- [36] R. Gopirajah, A. Choudhary, and C. Anandharamkrishnan, “Computational modeling of dehydration of mushroom,” *MOJ Food Processing & Technology*, vol. 6, no. 3, pp. 264–270, 2018.
- [37] R. A. Lemus-Mondaca, C. E. Zambra, A. Vega-Galvez, and N. O. Moraga, “Coupled 3D heat and mass transfer model for numerical analysis of drying process in papaya slices,” *Journal of Food Engineering*, vol. 116, no. 1, pp. 109–117, 2013.
- [38] E. Seyedabadi, M. Khojastehpour, and M. H. Abbaspour-Fard, “Convective drying simulation of banana slabs considering non-isotropic shrinkage using FEM with the arbitrary Lagrangian–Eulerian method,” *International Journal of Food Properties*, vol. 20, no. sup1, pp. S36–S49, 2017.
- [39] P. Rani and P. P. Tripathy, “Modelling of moisture migration during convective drying of pineapple slice considering non-isotropic shrinkage and variable transport properties,” *Journal of Food Science and Technology*, vol. 57, no. 10, pp. 3748–3761, 2020.
- [40] T. Defraeye and A. Radu, “Convective drying of fruit: A deeper look at the air-material interface by conjugate modeling,” *International Journal of Heat and Mass Transfer*, vol. 108, pp. 1610–1622, 2017.
- [41] M. M. Rahman, C. Kumar, M. U. H. Joardder, and M. A. Karim, “A micro-level transport model for plant-based food materials during drying,” *Chemical Engineering Science*, vol. 187, pp. 1–15, 2018.
- [42] R. Reddy, P. Ravula, D. Arepally, S. Munagala, and S. Golla, “Drying kinetics and modelling of mass transfer in thin layer convective drying of pineapple,” *Chemical Science International Journal*, vol. 19, no. 3, pp. 1–12, 2017.
- [43] R. A. Lemus-Mondaca, A. Vega-Gálvez, C. E. Zambra, and N. O. Moraga, “Modeling 3D conjugate heat and mass transfer for turbulent air drying of Chilean papaya in a direct contact dryer,” *Heat and Mass Transfer*, vol. 53, no. 1, pp. 11–24, 2017.
- [44] B. Dianda, T. S. Ky, A. Compaore, H. Guengane, S. Ouedraogo, and D. J. Bathiebo, “Modeling of tomato convective drying with COMSOL software,” *Asian Journal of Science and Technology*, vol. 10, no. 8, pp. 10021–10028, 2019.
- [45] C. Kumar, M. U. H. Joardder, T. W. Farrell, and M. A. Karim, “Multiphase porous media model for intermittent microwave convective drying (IMCD) of food,” *International Journal of Thermal Sciences*, vol. 104, pp. 304–314, 2016.
- [46] S. M. Vahidhosseini, E. Barati, and J. A. Esfahani, “Green’s function method (GFM) and mathematical solution for coupled equations of transport problem during convective drying,” *Journal of Food Engineering*, vol. 187, pp. 24–36, 2016.
- [47] Z. Guo and T. S. Zhao, “Explicit finite-difference lattice Boltzmann method for curvilinear coordinates,” *Physical Review E*, vol. 67, no. 6, p. 12, 2003.
- [48] F. Moukalled, L. Mangani, and M. Darwish, *The Finite Volume Method in Computational Fluid Dynamics: An Advanced Introduction with OpenFOAM and Matlab*, Springer International Publishing, 1st ed edition, 2016.
- [49] J. Peiró and S. Sherwin, “Finite difference, finite element and finite volume methods for partial differential equations,” in *Handbook of Materials Modeling*, pp. 1–32, Springer, 2005.
- [50] M. R. Goz, *Finite Element Method: Applications in Solids, Structures, and Heat Transfer*, CRC Press, Boca Raton, FL, 2006.
- [51] R. C. Martins, “Simple finite volumes and finite elements procedures for food quality and safety simulations,” *Journal of Food Engineering*, vol. 73, no. 4, pp. 327–338, 2006.
- [52] N. Malekjani and S. M. Jafari, “Simulation of food drying processes by computational fluid dynamics (CFD); recent advances and approaches,” *Trends in Food Science and Technology*, vol. 78, pp. 206–223, 2018.
- [53] A. G. Chilka and V. V. Ranade, “CFD modelling of almond drying in a tray dryer,” *Canadian Journal of Chemical Engineering*, vol. 97, no. 2, pp. 560–572, 2019.
- [54] R. B. Watharkar, S. Chakraborty, M. K. Hazarika, and B. Srivastava, “Mathematical modeling of drying kinetics of Bhimkol (Musa balbisiana) pulp using MATLAB,” *Agricultural Engineering International: CIGR Journal*, vol. 20, no. 2, pp. 183–189, 2018.
- [55] H. Majdi, J. A. Esfahani, and M. Mohebbi, “Optimization of convective drying by response surface methodology,” *Computers and Electronics in Agriculture*, vol. 156, pp. 574–584, 2019.
- [56] H. Majdi and J. A. Esfahani, “Energy consumption and drying time optimization of convective drying for performance improvement: response surface methodology and lattice Boltzmann method,” *Journal of Heat Transfer*, vol. 140, no. 10, pp. 1–13, 2018.
- [57] J. Chen, W. Wu, R. Cheng, Y. Jin, and Z. Liu, “Optimization of hot air drying process of corn using genetic algorithm and response surface methodology,” *International Journal of Food Properties*, vol. 23, no. 1, pp. 753–764, 2020.
- [58] A. F. K. Correia, A. C. Loro, S. Zanatta, M. H. F. Spoto, and T. M. F. S. Vieira, “Effect of temperature, time, and material thickness on the dehydration process of tomato,” *International Journal of Food Science*, vol. 2015, 7 pages, 2015.

- [59] T. J. Jamaledine and M. B. Ray, "Application of computational fluid dynamics for simulation of drying processes: a review," *Drying Technology*, vol. 28, no. 2, pp. 120–154, 2010.
- [60] E. Dogan, B. Sengorur, and R. Koklu, "Modeling biological oxygen demand of the Melen River in Turkey using an artificial neural network technique," *Journal of Environmental Management*, vol. 90, no. 2, pp. 1229–1235, 2009.
- [61] N. Karakaplan, E. Goz, E. Tosun, and M. Yuceer, "Kinetic and artificial neural network modeling techniques to predict the drying kinetics of *Mentha spicata* L.," *Journal of Food Processing & Preservation*, vol. 43, no. 10, pp. 1–10, 2019.
- [62] J. Nayak, K. Vakula, P. Dinesh, B. Naik, and D. Pelusi, "Intelligent food processing: Journey from artificial neural network to deep learning," *Computer Science Review*, vol. 38, article 100297, 2020.
- [63] T. Sarkar, M. Salauddin, S. K. Hazra, and R. Chakraborty, "Artificial neural network modelling approach of drying kinetics evolution for hot air oven, microwave, microwave convective and freeze dried pineapple," *SN Applied Sciences*, vol. 2, no. 9, pp. 1–8, 2020.
- [64] M. H. Nadian, S. Rafiee, M. Aghbashlo, S. Hosseinpour, and S. S. Mohtasebi, "Continuous real-time monitoring and neural network modeling of apple slices color changes during hot air drying," *Food and Bioproducts Processing*, vol. 94, pp. 263–274, 2015.
- [65] R. P. F. Guiné, M. J. Barroca, F. J. Gonçalves, M. Alves, S. Oliveira, and M. Mendes, "Artificial neural network modeling of the antioxidant activity and phenolic compounds of bananas submitted to different drying treatments," *Food Chemistry*, vol. 168, pp. 454–459, 2015.
- [66] D. I. Onwude, N. Hashim, R. B. Janius, N. Nawi, and K. Abdan, "Modelling the convective drying process of pumpkin (*Cucurbita moschata*) using an artificial neural network," *International Food Research Journal*, vol. 23, pp. S237–S243, 2016.
- [67] N. Ahmed, J. Singh, H. Chauhan, P. G. A. Anjum, and H. Kour, "Different drying methods : their applications and recent advances," *International Journal of Food Nutrition and Safety*, vol. 4, no. 1, pp. 34–42, 2013.
- [68] D. G. Mercer and P. Peng, *Solar drying in developing countries : possibilities and pitfalls*, International Union of Food Science and Technology, 2008.
- [69] D. Maisnam, P. Rasane, A. Dey, S. Kaur, and C. Sarma, "Recent advances in conventional drying of foods: a review," *Journal of Food Technology and Preservation*, vol. 1, no. 1, pp. 25–34, 2017.
- [70] A. Arslan, Y. Soysal, and M. Keskin, "Mathematical modeling, moisture diffusion and color quality in intermittent microwave drying of organic and conventional sweet red peppers," *AgriEngineering*, vol. 2, no. 3, pp. 393–407, 2020.