

## Research Article

# The Novel Heuristic for Data Transmission Dynamic Scheduling Problems

Hao Xu,<sup>1,2</sup> Yue Zhao,<sup>3</sup> Li-Ning Xing,<sup>3</sup> and You Zhou<sup>1,4</sup>

<sup>1</sup> College of Computer Science and Technology, Jilin University, Changchun 130012, China

<sup>2</sup> Center for Computer Fundamental Education, Jilin University, Changchun 130012, China

<sup>3</sup> Department of Management, College of Information System and Management, National University of Defense Technology, Changsha 410073, China

<sup>4</sup> Symbol Computation and Knowledge Engineer of the Ministry of Education, Jilin University, Changchun 130012, China

Correspondence should be addressed to Hao Xu; [xuhao@jlu.edu.cn](mailto:xuhao@jlu.edu.cn)

Received 20 August 2013; Revised 27 November 2013; Accepted 28 November 2013

Academic Editor: Zhenyu Huang

Copyright © 2013 Hao Xu et al. This is an open access article distributed under the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

The data transmission dynamic scheduling is a process that allocates the ground stations and available time windows to the data transmission tasks dynamically for improving the resource utilization. A novel heuristic is proposed to solve the data transmission dynamic scheduling problem. The characteristic of this heuristic is the dynamic hybridization of simple rules. Experimental results suggest that the proposed algorithm is correct, feasible, and available. The dynamic hybridization of simple rules can largely improve the efficiency of scheduling.

## 1. Introduction

With the approaching of information age, the number of communication satellites has increased constantly, and the request of satellite data transmission is also increased. Because of the cost of ground stations, the contradiction between resources and demands is more serious than before. Under the limitations of ground resources, the data transmission scheduling that shows how to properly allocate limited ground resources to meet the request of data transmission has become an important problem to be solved. The data transmission scheduling is a process that allocates the ground stations and available time windows to data transmission tasks under the certain constraints and assumed conditions [1, 2]. It is a kind of complex constraint satisfaction optimization problem and has the characteristics of time window constraint, multiresource constraint, and high confliction.

Recently, many scholars have widely investigated the data transmission scheduling problems. They proposed some reasonable scheduling models and scientific scheduling algorithms [3–5]. These models and approaches mainly focus on the static scheduling. In the actual scheduling process, the resource constraint and task attribute will be changed due

to many reasons. During the execution of scheduling plan, it needs to be adjusted dynamically to ensure the maximization of scheduling objectives.

With the consideration of actual scheduling demands, the idea of dynamic scheduling and automatic planning are proposed based on the analysis of data transmission scheduling. The mathematical model is constructed to describe the problem with unified standard. The scheduling framework is designed according to the actual scheduling process. Some basic rules and rule-based heuristics are designed according to the problem characteristics and practical operating experience. The best scheduling plan for each algorithm is obtained through the comprehensive evaluation by TOPSIS. The algorithm can be evaluated through comparing the comprehensive index of algorithms.

## 2. Data Transmission Dynamic Scheduling Problem

The data transmission dynamic scheduling is a process that dynamically allocates the ground station resources and time windows for executing the data transmission [6–9]; it needs the satellites to adjust in real time according to the situation of

data transmission. Therefore, the idea of dynamic scheduling and automatic planning are proposed based on the analysis of data transmission scheduling. This idea has omitted the link of summarizing information by the control center, which really realized the automation and real time of data transmission. The dynamic scheduling was completed via automatic planning and the initial plans were rescheduled in real time. It requires the less computing power, makes fast decision and dynamic real-time decision.

**2.1. Basic Symbols.** The basic symbols of data transmission dynamic scheduling problems can be summarized as in the following five tuples [10–12]:

$$\Theta = (T, R, C, TW, t_{\text{horizon}}). \quad (1)$$

$T = \{t_1, t_2, \dots, t_n\}$  means the task set; the task attributes are denoted as  $TA = (ID, D, P, EST, LET)$ , in which  $ID$  denotes the task identification,  $D$  denotes the duration of each task,  $P$  denotes the task priority,  $EST$  denotes the earliest start time for each task, and  $LET$  denotes the latest end time.

$R$  denotes the resource set, and the resource attributes are denoted as  $RA = (S, G)$ , in which  $S = \{S_1, S_2, \dots, S_{SN}\}$  denotes the satellite resource and  $G = \{G_1, G_2, \dots, G_{GN}\}$  denotes the ground station resource.

The main constraint of data transmission dynamic scheduling is  $C = C_t \wedge C_r \wedge C_{tw}$ , in where  $C_t$  denotes the task constraint, namely, the execution of tasks.  $C_r$  denoted the relation constraint, it is, a data transmission resource can only be allocated to one task at any time. The time constraint is represented by  $C_{tw}$ , indicating the performance of all the tasks in the given period of time.

$TW = \{tw_1, tw_2, \dots, tw_n\}$  denotes the time window set, namely, the quantity of time windows between each task and each satellite.  $t_{\text{horizon}}$  denotes the deadline of the whole scheduling process.

**2.2. Mathematical Model.** The data transmission dynamic scheduling model can be represented by the following tuples:

$$\Theta_{l+1} = (\Theta_l, \alpha_l^\ominus, DI, t_{\text{horizon}}), \quad (2)$$

in which  $\Theta_l$  denotes the initial scheduling problem  $\Theta = (T, R, C, TW, t_{\text{horizon}})$  before a new task arrives, and  $\alpha_l^\ominus$  means the initial scheduling plan.  $DI = (T^{\text{new}}, R^{\text{new}}, C^{\text{new}}, TW^{\text{new}})$  denotes the dynamic scheduling information set, representing the change of task of data transmission in scheduling process, resource, constraint condition, and time window.  $C^{\text{new}} = C_t^{\text{new}} \wedge C_r^{\text{new}} \wedge C_{tw}^{\text{new}}$  denotes the dynamic constraint set, and

$$C_t^{\text{new}}: s_i = s_i(\alpha_i^\ominus), \text{ if } (s_i + d_i \leq t), \quad (3)$$

$$\text{or } ((s_i < t), (s_i + d_i > t)), \quad i \in N,$$

$$C_r^{\text{new}}: \begin{cases} C_r^{\text{new}}(T_r) = \wedge((T_r = 0) \vee (\cup S_{SN} \neq \emptyset)), \\ C_r^{\text{new}}(T_r) = \wedge((T_r = 0) \vee (\cup Q_{r,j} \neq \emptyset)), \end{cases} \quad (4)$$

$$r = 1, 2, \dots, m,$$

$$C_{tw}^{\text{new}}: t \leq s_r \leq t_{\text{horizon}}, \quad t \leq s_r + d_r \leq t_{\text{horizon}}.$$

The first constraint indicates that, in original scheduling plan, the task dispatched or was dispatched before the available time window studied in dynamic scheduling time can no more be rescheduled.  $C_r^{\text{new}}(T_r) = \wedge((T_r = 0) \vee (\cup S_{SN} \neq \emptyset))$  indicates that it is established only if either  $T_r = 0$  or  $\cup S_{SN} \neq \emptyset$  is met, which means that there are two situations over whether the task is dispatched, and, meanwhile, the task should obtain a data transmission resource at least.

$C_r^{\text{new}}(T_r) = \wedge((T_r = 0) \vee (\cup Q_{r,j} \neq \emptyset))$  indicates that it is established only if either  $T_r = 0$  or  $\cup Q_{r,j} \neq \emptyset$  is met, which means that there are two kinds of scheduling for the task, and, meanwhile, each task can obtain the available time window under certain resource;  $Q_{r,j}$  denotes the demand variable, namely, the demand of available time window between the  $i$ th task and the  $j$ th ground station.

$C_{tw}^{\text{new}}: t \leq s_r \leq t_{\text{horizon}}, t \leq s_r + d_r \leq t_{\text{horizon}}$  denotes the dynamic time constraint, in which  $s_r$  and  $d_r$  are, respectively, the start time and the time required to finish the  $r$ th task scheduling; namely, any task of data transmission must be completed before the given deadline.

In the data transmission dynamic scheduling problem, the scheduling plan should transmit the information to destination in time as fast as possible to ensure the effectiveness [13–16]. It mainly contains the indexes of total priority of scheduling task and the task scheduling success ratio in this research. The total priority of scheduling tasks is set to reflect the validity of scheduling plan, and its formula is listed as follows:

$$SP = \sum_{i=1}^n TI_i P_i. \quad (5)$$

Here,  $TI = \{TI_1, TI_2, \dots, TI_n\}$  denotes the decision variable of tasks,  $\forall i \leq n, TI_i = \{0, 1\}$ :  $TI_i = 1$  means being scheduled, and  $TI_i = 0$  means not being scheduled. An effective scheduling plan should successfully dispatch as many tasks as possible. Hence, the task scheduling success ratio is set to reflect the validity of scheduling plan, and its formula is listed as follows:

$$TP = \frac{\sum_{i=1}^n TI_i}{N}, \quad (6)$$

in which  $N$  denotes the total number of dynamic scheduling tasks.

### 3. Heuristic Algorithms

The data transmission dynamic scheduling implements the real-time scheduling by automatic planning. The basic framework of proposed heuristic is designed according to the actual dynamic scheduling process, the basic rules of dynamic scheduling were summarized from previous planning and scheduling experience, and finally the rule-based heuristic algorithm was proposed. The basic framework of proposed heuristic is shown in Figure 1.

The essence of data transmission dynamic scheduling is, when executing the task based on initial scheduling plan, rescheduling it according to dynamic interaction information. The advantage of rule-based heuristic is being without

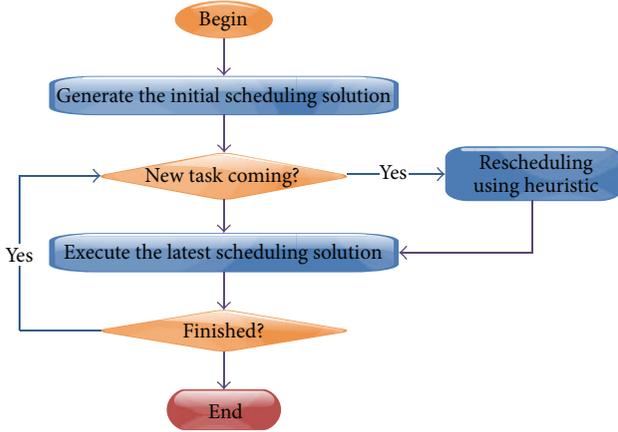


FIGURE 1: The basic framework of proposed heuristic.

plenty of computation, which has reduced the demand for allocation of computing resources in scheduling operation and avoided the combination explosion [17–21]. Only when the proper rule is selected, the corresponding scheduling strategy can be produced [22, 23]. At present, the deterministic single rule heuristic has been widely employed to the data transmission scheduling [24, 25]. In order to solve the data transmission dynamic scheduling effectively, a novel heuristic is proposed based on the existing deterministic single rule. The characteristic of this novel heuristic is the dynamic hybridization of deterministic simple rules. Since the data transmission dynamic scheduling is a kind of multiobjective problem, the TOPSIS was employed to make a comprehensive evaluation of different objectives.

**3.1. Deterministic Single Rules.** The following kinds of deterministic single rules are considered in this research work. These deterministic single rules determine the task processing sequence according to the given attribute (such as, task priority, task duration, earliest start time and latest end time etc.) firstly and then arrange each task following the previous sequence. The realization process of deterministic single rules is simple, its idea is easy to understand, and the execution speed is relatively fast.

- (1) Deterministic sequence based on the priority (DSP): it determines the task processing sequence according to the task priority (prior to sequencing the task with the large priority).
- (2) Deterministic sequence based on the duration (DSD): it determines the task processing sequence according to the duration (prior to sequencing the task with the small duration).
- (3) Deterministic sequence based on the start time (DSST): it determines the task processing sequence based on the start time (prior to sequencing the task with the small earliest start time).
- (4) Deterministic sequence based on the end time (DSET): it determines the task processing sequence

according to the end time (prior to sequencing the task with the small latest end time).

**3.2. Random Single Rules.** Four kinds of random single rules are considered in this work. These random single rules randomly determine the task processing sequence based on the certain attributes (for example, task priority, task duration, earliest start time, and latest end time etc.) firstly and then arrange each task following the previous sequence. The realization process of random single rules is simple and the obtained solution is fairly outstanding.

(1) *Random Sequence Based on the Priority (RSP).* It randomly determines the task processing sequence based on the task priority. For each task, it will be selected with the following probability:

$$\Pr_i = \frac{P_i}{\sum_{i=1}^n P_i}. \quad (7)$$

Here,  $\Pr_i$  denotes the selected probability of task  $i$ ,  $P_i$  denotes the priority of task  $i$ , and  $n$  denotes the number of tasks.

(2) *Random Sequence Based on the Duration (RSD).* This random single rule randomly determines the task processing sequence according to the duration. For each task, it will be selected with the following probability:

$$\Pr_i = \frac{D'_i}{\sum_{i=1}^n D'_i}. \quad (8)$$

Here,  $\Pr_i$  denotes the selected probability of task  $i$ , and

$$D'_i = 2 \times \max_{1 \leq i \leq n} \{D_i\} - D_i. \quad (9)$$

$D_i$  denotes the duration of task  $i$ .

(3) *Random Sequence Based on the Start Time (RSST).* It randomly determines the task processing sequence based on the start time. For each task, it will be selected with the following probability:

$$\Pr_i = \frac{EST'_i}{\sum_{i=1}^n EST'_i}. \quad (10)$$

Here,  $\Pr_i$  denotes the selected probability of task  $i$ , and

$$EST'_i = 2 \times \max_{1 \leq i \leq n} \{EST_i\} - EST_i. \quad (11)$$

$EST_i$  denotes the earliest start time of task  $i$ .

(4) *Random Sequence Based on the End Time (RSET).* It randomly determines the task processing sequence based on the end time. For each task, it will be selected with the following probability:

$$\Pr_i = \frac{LET'_i}{\sum_{i=1}^n LET'_i}. \quad (12)$$

Here,  $\Pr_i$  denotes the selected probability of task  $i$ , and

$$LET'_i = 2 \times \max_{1 \leq i \leq n} \{LET_i\} - LET_i. \quad (13)$$

$LET_i$  denotes the latest end time of task  $i$ .

TABLE 1: The Actual Validation Data Format.

Task identification	Task priority	Task execution time	Start time of visible window	End time of visible window	Ground station and antenna used for executing tasks	
92	10	33	913	946	REEF-A	REEF-B
93	5	36	915	951	GUAM-A	GUAM-B

3.3. *Random Hybrid Rules.* Based on the previous kinds of random single rules, the random hybrid rule (RHR) is proposed to the data transmission dynamic scheduling. the random hybrid rule randomly determines the task processing sequence based on the different random single rules firstly and then arranges each task following the previous sequence. The realization process of random hybrid rule is slightly complex and the obtained solution is fairly outstanding. The random hybrid rule is defined as follows:

$$\text{RHR} = \begin{cases} \text{RSP} & 0 \leq r < p_1 \\ \text{RSD} & p_1 \leq r < p_2 \\ \text{RSST} & p_2 \leq r < p_3 \\ \text{RSET} & p_3 \leq r \leq 1. \end{cases} \quad (14)$$

Here,  $r$  is a random number and  $p_1$ ,  $p_2$ , and  $p_3$  are three predefined thresholds. In the random hybrid rule, the RSP rule is selected with the probability  $p_1$ , the RSD rule is selected with the probability  $p_2 - p_1$ , the RSST rule is selected with the probability  $p_3 - p_2$ , and the TSET is selected with the probability  $1 - p_3$ . After repeatedly employing the random single rules, they will obtain multiple different solutions. In order to compare these solutions, the TOPSIS was utilized to make a comprehensive evaluation. Since the random hybrid rule has integrated many rules for scheduling, the space of feasible solution was extended and the optimum capability of algorithms was improved greatly.

## 4. Experimental Results

In this paper, the testing examples are produced based on the AFIT benchmark data which were generated by United States Air Force Academy. The AFIT benchmark data include seven contents. The task is distinguished by identification and the scheduling resources only have the ground station antenna. According to the actual demand, the task priority attribute is increased. Since the set-up time exists, the task execution time and the visible time window can be extended directly. The improved validation data are shown in Table 1. The AFIT benchmark data provided 14 groups of scheduling task data by high-low earth orbit satellites. This paper selected medium-scale low earth orbit satellites and constructed four scheduling instances with different scales.

The four instances were used to verify the nine different heuristics; their comprehensive evaluation indexes were compared based on the simulation results, as shown in Figure 2. The following conclusions can be made from experimental results. In the respect of comprehensive evaluation index, the random hybrid rule is better than the random single

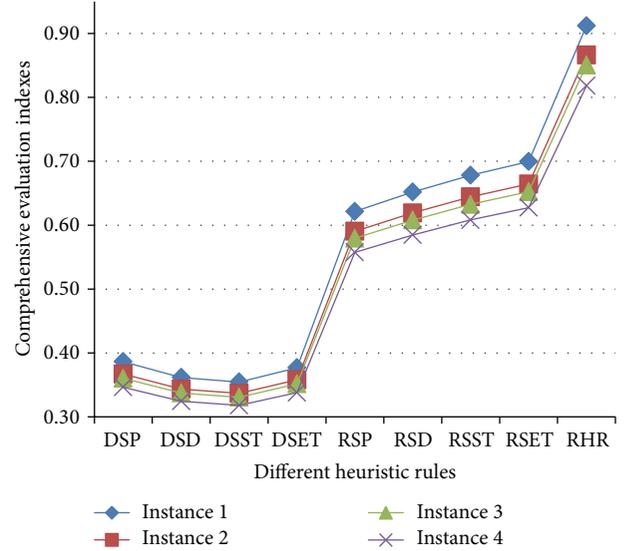


FIGURE 2: The comparison of comprehensive evaluation indexes.

rule, and random simple rule is superior to the deterministic simple rule. It is known that since the random hybrid rule has introduced the thought of random selection and summarized multiple heuristic rules for scheduling, the space of feasible solutions was extended and the optimum capability of heuristic rules was greatly improved. Generally speaking, the proposed random hybrid rule can obviously enhance the validity of dynamic scheduling and ensure the high efficiency and stability, which has a higher comprehensive performance.

## 5. Conclusions

The data transmission dynamic scheduling problem is a complex scheduling problem. In this paper, the reasonable mathematical model was established, the rule-based heuristic algorithm was designed, and TOPSIS was applied into the comprehensive evaluation. Through verifying by several groups of instances, their results of comparison indicate that the proposed algorithm is able to enhance the validity of dynamic scheduling obviously. It can also ensure the high efficiency and stability.

## Conflict of Interests

The authors declare no conflict of interests.

## Acknowledgments

The authors thank the reviewers for valuable comments and constructive suggestions. They also thank the editors for helpful suggestions. This paper is supported by the National Natural Science Foundation of China (nos. 61300147, 61202309, 71101150, 71071156, and 61203180) and the Program for New Century Excellent Talents in University.

## References

- [1] L. Barbulescu, J.-P. Watson, L. D. Whitley, and A. E. Howe, "Scheduling space-ground communications for the air force satellite control network," *Journal of Scheduling*, vol. 7, no. 1, pp. 7–34, 2004.
- [2] S. Elloumi and P. Fortemps, "A hybrid rank-based evolutionary algorithm applied to multi-mode resource-constrained project scheduling problem," *European Journal of Operational Research*, vol. 205, no. 1, pp. 31–41, 2010.
- [3] B. Nicola, F. C. Jean, D. Jacques et al., "A heuristic for the multi-satellite, multi-orbit and multi-user management of Earth observation satellites," *European Journal of Operational Research*, vol. 177, no. 2, pp. 750–762, 2005.
- [4] J.-F. Cordeau and G. Laporte, "Maximizing the value of an Earth observation satellite orbit," *Journal of the Operational Research Society*, vol. 56, no. 8, pp. 962–968, 2005.
- [5] W.-J. Xia and Z.-M. Wu, "Hybrid particle swarm optimization approach for multi-objective flexible job-shop scheduling problems," *Control and Decision*, vol. 20, no. 2, pp. 137–141, 2005.
- [6] D. C. Mattfeld and C. Bierwirth, "An efficient genetic algorithm for job shop scheduling with tardiness objectives," *European Journal of Operational Research*, vol. 155, no. 3, pp. 616–630, 2004.
- [7] Y.-A. Yang, H.-H. Fan, Z.-R. Feng, B. Wang, and Y.-J. Luo, "Simulation & realization of satellite TT&C resources scheduling based on event scheduling method," *Journal of System Simulation*, vol. 7, no. 4, pp. 982–985, 2005.
- [8] F. Yao and L. N. Xing, "Algorithm and application to scheduling problem of agile Earth observing satellites," *Disaster Advances*, vol. 5, no. 4, pp. 1112–1116, 2012.
- [9] J. F. Li and L. N. Xing, "Integrative forest fire monitoring system framework design aim to early warning tasks," *Disaster Advances*, vol. 5, no. 4, pp. 726–729, 2012.
- [10] Y. Liu, Y.-W. Chen, and Y.-J. Tan, "Modeling and algorithm for the new Tasks' arriving in multi-satellites dynamic scheduling," *System Engineering*, vol. 25, no. 4, pp. 35–41, 2005.
- [11] Y.-F. Li, X.-G. Chen, and X.-Y. Wu, "Research on the model of satellite data transmission scheduling," *Journal of National University of Defense Technology*, vol. 17, no. 9, pp. 121–125, 2007.
- [12] J. M. Wang and Y. J. Tan, "Research on heuristic algorithm for problem of multi-satellites dynamic scheduling," *Computer Engineering and Applications*, vol. 43, no. 21, pp. 21–25, 2007.
- [13] Y. Liu, *Research on dynamic rescheduling model, algorithm and its applications of imaging reconnaissance satellite scheduling problem [Ph.D. thesis]*, National University of Defense Technology, Changsha, China, 2004.
- [14] L. Xing, P. Rohlfshagen, Y. Chen, and X. Yao, "An evolutionary approach to the multidepot capacitated arc routing problem," *IEEE Transactions on Evolutionary Computation*, vol. 14, no. 3, pp. 356–374, 2010.
- [15] R. Xu and H.-P. Chen, "Optimization algorithm on batch scheduling with different release time and non-identical job sizes," *Computer Integrated Manufacturing Systems*, vol. 17, no. 9, pp. 1944–1953, 2011.
- [16] H. Yan and X. Y. Wu, "Emergency task schedule model for satellite data transmission," *Computer Engineering*, vol. 38, no. 10, pp. 31–33, 2012.
- [17] K. Sun, *Research on multi imaging satellites and ground stations joint scheduling problem based on heuristic algorithms [M.S. thesis]*, National University of Defense Technology, Changsha, China, 2008.
- [18] J.-Y. Yin, G.-C. Gu, and J. Zhao, "Dynamic scheduling algorithm for hybrid real-time tasks with precedence constraints," *Computer Integrated Manufacturing Systems*, vol. 16, no. 2, pp. 411–422, 2010.
- [19] C. Chen and L.-N. Xing, "GA-ACO for solving flexible job shop scheduling problem," *Computer Integrated Manufacturing Systems*, vol. 17, no. 3, pp. 615–621, 2011.
- [20] S.-J. Wang, "Improved contract net protocol for manufacturing tasks dynamic assignment," *Computer Integrated Manufacturing Systems*, vol. 17, no. 6, pp. 1257–1263, 2011.
- [21] Y. Zong, Q. Liu, C.-Y. Zhang, and H.-P. Zhu, "Multi-project scheduling problem with resource transfer time," *Computer Integrated Manufacturing Systems*, vol. 17, no. 9, pp. 1921–1928, 2011.
- [22] L.-N. Xing, Y.-W. Chen, and K.-W. Yang, "A novel mutation operator based on the immunity operation," *European Journal of Operational Research*, vol. 197, no. 2, pp. 830–833, 2009.
- [23] L.-N. Xing, P. Rohlfshagen, Y.-W. Chen, and X. Yao, "A hybrid ant colony optimization algorithm for the extended capacitated arc routing problem," *IEEE Transactions on Systems, Man, and Cybernetics B*, vol. 41, no. 4, pp. 1110–1123, 2011.
- [24] F. Chang, *Studies on the method of capability evaluation for ground station system resource [M.S. thesis]*, National University of Defense Technology, Changsha, China, 2005.
- [25] Y. H. Qiao, "A study for the multi-attribute decision-making method based on TOPSIS," *Technological Development of Enterprise*, vol. 25, no. 9, pp. 89–91, 2006.



# Hindawi

Submit your manuscripts at  
<http://www.hindawi.com>

