

## *Retraction*

# **Retracted: Application of Intelligent Robot Palletizer Technology in the Optimization of High-Speed Train Operation and Simulation Verification**

### **Journal of Robotics**

Received 23 January 2024; Accepted 23 January 2024; Published 24 January 2024

Copyright © 2024 Journal of Robotics. This is an open access article distributed under the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

This article has been retracted by Hindawi following an investigation undertaken by the publisher [1]. This investigation has uncovered evidence of one or more of the following indicators of systematic manipulation of the publication process:

- (1) Discrepancies in scope
- (2) Discrepancies in the description of the research reported
- (3) Discrepancies between the availability of data and the research described
- (4) Inappropriate citations
- (5) Incoherent, meaningless and/or irrelevant content included in the article
- (6) Manipulated or compromised peer review

The presence of these indicators undermines our confidence in the integrity of the article's content and we cannot, therefore, vouch for its reliability. Please note that this notice is intended solely to alert readers that the content of this article is unreliable. We have not investigated whether authors were aware of or involved in the systematic manipulation of the publication process.

Wiley and Hindawi regrets that the usual quality checks did not identify these issues before publication and have since put additional measures in place to safeguard research integrity.

We wish to credit our own Research Integrity and Research Publishing teams and anonymous and named external researchers and research integrity experts for contributing to this investigation.

The corresponding author, as the representative of all authors, has been given the opportunity to register their agreement or disagreement to this retraction. We have kept a record of any response received.

### **References**

- [1] X. Zhang, "Application of Intelligent Robot Palletizer Technology in the Optimization of High-Speed Train Operation and Simulation Verification," *Journal of Robotics*, vol. 2023, Article ID 2656636, 10 pages, 2023.

## Research Article

# Application of Intelligent Robot Palletizer Technology in the Optimization of High-Speed Train Operation and Simulation Verification

Xiaoling Zhang 

Henan Rail Transit Intelligent Safety Engineering Technology Research Center, Zhengzhou, Henan 451460, China

Correspondence should be addressed to Xiaoling Zhang; 10359@zzrvtc.edu.cn

Received 4 November 2022; Revised 6 April 2023; Accepted 27 April 2023; Published 31 May 2023

Academic Editor: Iqbal Ahmad

Copyright © 2023 Xiaoling Zhang. This is an open access article distributed under the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

With the continuous development of society and economy, energy consumption and exhaust emissions of high-speed trains have also gained more and more attention from the industry. Hence, optimizing the operation of high-speed trains is of pivotal significance to achieve optimization as required. On the basis of the intelligent robot palletizer technology, a spatial construction method and intelligent robot palletizer capable of operating through the dispatching of high-speed trains are put forward in this paper on the basis of the situation of high-speed trains assigned. The method of changing the arrival time of the trains and the order of departure are adopted to control the operation of the high-speed trains in an efficient and intelligent manner. With regard to the intervals of departure time, the overtaking of trains and other issues, a three-dimensional spatial travel route is established and used for processing. The intelligent robot palletizer is used to implement the dispatching of trains in the aspect of height. Subsequently, the minimum value method and secure network technology are used to verify that the technology of the intelligent robot palletizer is mature and reliable. Finally, a practical case analysis is carried out in this paper on some sections of the Harbin–Dalian high-speed railway to verify the accuracy and effectiveness of the method proposed in this paper. Through the comparative analysis with other methods, the advantages of the algorithm put forward in this paper can be observed.

## 1. Introduction

As society and economy continue to develop, high-speed trains are no longer a luxury but a common commodity that is available to millions of households. With this comes the issue of security, and it is vital to ensure the safety of drivers, which is the first priority in the operation of high-speed trains. Thus, from the perspective of the manufacturers, reducing the car body weight of high-speed trains can achieve the effect of energy conservation and emission reduction on the one hand; on the other hand, with the reduction of car body weight, the corresponding inertia will also be smaller. In recent years, as the studies on the operational optimization of high-speed trains have intensified and become more in-depth, the application of operationally optimized materials, lighter structures, and other measures are adopted to lower the mass of the car body on the premise

of ensuring that the structural properties of the car body remain unchanged. Both stiffness and modal indicators for the car body operation are optimized [1–4]. At the same time, the optimization of the car body operation does not mean that it has to be achieved at the cost of reduced security settings. On the one hand, high-strength steel, aluminum-magnesium alloy, and other related materials can be applied for the analysis and application in the optimization of the car body operation. On the other hand, on the premise of the existing materials and technologies, efforts are made to reduce the mass of each component as much as possible and finally achieve the goal of optimizing the vehicle mechanism operation [5, 6]. However, in the application of structure operation optimization in the high-speed trains, it is necessary to ensure that the demand of security in the event of car body collision can be met. Operation optimization of the car body is a multiparameter, complex optimization

proposition that requires constant and comprehensive testing of the body performance of trains. Efforts made to make modifications or mitigation based solely on the experiences often result in other effects that fail to meet and guaranty the demand for the performance as desired. Therefore, it is necessary to analyze the quantitative function of the structural performance of the car body so as to achieve the capacity to mitigate the car body issues and optimize the operation after multiple tests and simulation. When the actual train operation plan deviates from the planned train operation in some aspects, it can directly disrupt the overall order of train operation. In this case, the train dispatcher should adjust the train operation plan quickly so that the operation of trains can comply with the original plan as soon as possible and therefore reduce the deviation between the actual train operation plan and the planned train operation to a certain extent. In general, the deviation is measured by data such as throughput, accuracy, and so on, which is also the target for the control and adjustment in the dispatching of trains [7–9].

For the purpose of raising the comprehensive evaluation capability of all high-speed trains in the aspect of operation optimization, it is necessary to extract the features of the starting and ending points of high-speed train operation. Thus, a comprehensive evaluation method for all high-speed trains is put forward on the basis of machine image vision processing. In combination with the extraction of features related to edge contours and the detection method for determining the diagonal points, a comprehensive evaluation is carried out on the operating status of high-speed trains. The process of acquiring the operating state is verified for high-speed trains in the aspect of the edge contours in the images of the operating state acquired by the robot. At the same time, a distributed reconstructed model for the operational status information of high-speed trains is constructed by visualizing and integrating the operational status of high-speed trains based on the method of reconstructing the information on the boundary area. Through sorting out the corresponding business flow of high-speed trains during the operation, the relevant quality indicators for high-speed train are analyzed and the system is established and tested accordingly [10, 11]. On the basis of the operational state for action analysis, the LSTM model is adopted to carry out indicator screening, and the corresponding simulation experiments are performed to build a regression model, with the purpose to develop an appropriate operation plan corresponding to the quality of high-speed trains, thereby providing the corresponding decision-making basis as a reference and the support for the scientific operation of high-speed trains. For the purpose of acquiring an effective fusion of image information on the operating status of high-speed trains, a comprehensive evaluation of the routine operating status of high-speed trains can be implemented on the basis of the final results of image fusion. A linear integer programming method of the combination type is applied to create a model for the effective control of the train movement form. In this way, the ultimate goal to minimize delays and maximize the durability of the train operation can be accomplished in accordance with the plan. In addition,

a heuristic algorithm is used to identify and resolve conflicts of the functions from a certain perspective. The strategy applied is to adjust trains that are late as soon as possible before station disruptions even occur, and a relatively mixed integer programming model is developed with the purpose to reduce the value of the total weighted train delays and the number of canceled trains as much as possible and to impose the constraints continuously by ensuring a certain interval of time, station capacity, and so on. A relatively rough serial model is developed for the control of train traffic, and an algorithm with more simplified operational control is put forward accordingly. However, two relatively significant problems have not yet been solved: no specific and operational adaptation strategies have been put forward, and the computational process is highly complicated in general [12, 13].

In this paper, an effective solution method for construction at the spatial level is put forward, which mainly transforms the timing problem into three spatial regions with different dimensions. For the purpose of further increasing the speed of convergence and improving the effectiveness of the algorithm, a series of heuristic coefficients, expectation type coefficients, and dynamic control methods required for the pheromone generation evaporation coefficients of the data are explored.

## 2. Train Dispatching Model Based on the Intelligent Robot Palletizer Technology

The structure of the train dispatching based on the technology of the intelligent robot palletizer is illustrated in Figure 1 as the following [14]. In this paper, a four-degree-of-freedom intelligent robot palletizer is used, which is mainly composed of a robot base, a waist, and large and small arms, in which the robot arms can perform actions at four degrees of rotation.

With regard to the operation of high-speed train operation, it can be divided into two steps. The first step is to carry out comprehensive research and judgment of the stiffness and modal performance of high-speed trains so as to ensure the quality of the high-speed trains on the premise of achieving the optimization goals without reducing the performance. In the optimization, the replacement of car body materials is taken into consideration, which is adjusted and optimized in accordance with the production cost of car body parts and the technical level of the modern processes. For passengers and drivers, the practical simulation of driving and riding simulation is carried out, and the operation results before and after the optimization of the simulation design are compared. If the difference of the simulation results exceeds the set threshold, the security performance requirements in case of collision are not met; on the other hand, if the difference of the simulation results is within the set threshold, the security performance requirements are met [15, 16]. The process is performed until the optimization process of high-speed train operation optimization is finally accomplished.

The so-called quantitative calculation of function approximation is carried out on the basis of statistical and

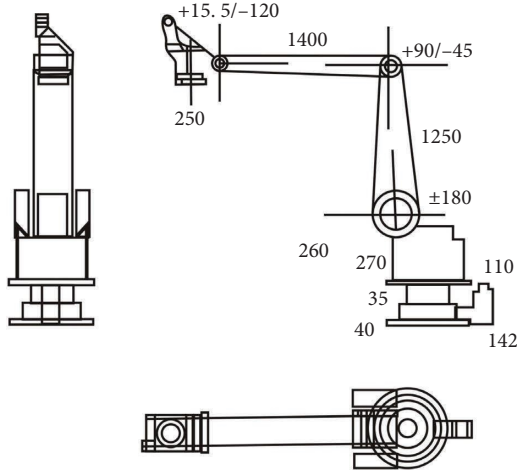


FIGURE 1: Structure diagram of robot palletizer.

numerical calculations to implement the fitting of the function across all samples on the basis of a limited number of discrete samples, that is, the process of predicting the unknown part through establishing a function expression by using the existing sample points. Taking the number of samples and function simulation into comprehensive consideration, the minimization deviation sum of squares function is selected in this paper for parameter optimization, and the details are shown in equation (1) as follows:

$$\min \sum_{k=1}^n [\hat{y}(X^{(k)}) - y(X^{(k)})]^2. \quad (1)$$

In the abovementioned equation, the number of experiments is denoted by  $n$ ,  $X$  stands for the vector of variables,  $y$  stands for the actual parameter response value, and  $\min f(x)$  stands for the predicted value.

As far as the constraint function is concerned, comprehensive consideration is made in this paper to improve the accuracy of the proposed model by increasing the sample points, and the specific constraint boundary is shown in Figure 2 as follows.

For the purpose of further ensuring that the predicted value of the response function is closer to the actual value, the predicted value of the sample space needs to be distributed on the safe side of the constraint boundary as much as possible, and the details are shown in equation (2) as follows:

$$\hat{g}(X) - g(X) \geq 0. \quad (2)$$

On the basis of equation (2) mentioned above, the corresponding constraint function is added for the optimization of the model, that is, the global approximation is carried out while ensuring the validity of the approximation boundary at the same time. The details are shown in equation (3) as follows:

$$\begin{aligned} \min \sum_{k=1}^n [\hat{g}(X^{(k)}) - g(X^{(k)})]^2, \\ \text{s.t. } \hat{g}(X^{(k)}) - g(X^{(k)}) \geq 0. \end{aligned} \quad (3)$$

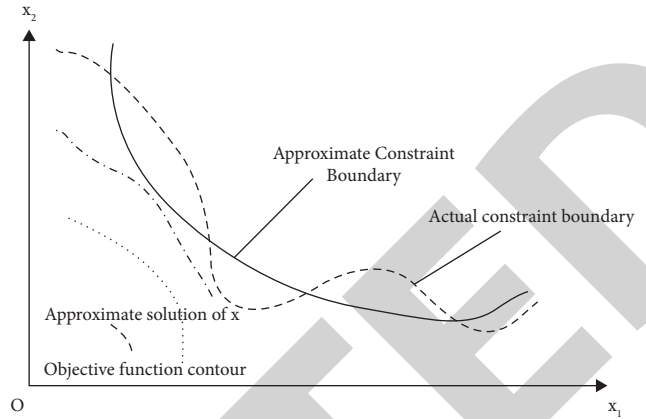


FIGURE 2: Difference in the actual/approximate constraint boundaries.

For the purpose of analyzing the starting point and the end point features of the routine operation status of high-speed trains in the operation status model, it is necessary to construct a model for acquiring the information related to the routine operation status of high-speed trains in the operation status model. In the process of acquiring the relevant operation status, the images of the routine operation status of high-speed trains obtained by the robot are verified in the edge contour. At the same time, a fusion analysis method is further used to verify the pixel points related to the routine operation sequence of high-speed trains in the operating state model on the basis of data samples with a higher dimension. The image processing model is applied to create profiles for the routine operation of high-speed trains in the operating model, and a three-dimensional geometric model of the distribution of the routine operating state of the high-speed train in the operating state model is established [17, 18]. Finally, the sequence of associated instantaneous feature distributions thus acquired is calculated according to the equation as follows:

$$Dif(C_1, C_2) = \min k(x, y). \quad (4)$$

In the abovementioned equation, the letter  $x$  and letter  $y$  stand for the sampling features of the high-speed train in the operating state mode based on the routine operating state information model, respectively, and the letter  $k$  stands for the specific value of the similar neighboring points. The mapping relationship formula for the display circuit is used to implement the relevant operating state of the high-speed train. In addition, the specific method for identifying the relevant edge profile is combined to analyze the main features of the routine operating state of high-speed trains in the operating state mode, and a specific model for the integration of the distribution of the fused features in the operation of the high-speed trains is obtained on this basis.

Through the identification of the relational data on the mapping equation between the low-dimensional space and the high-dimensional space and the computation on the basis of the variational approach provided by the Eulerian

Lagrangian equation, an image acquisition model dedicated to the routine operational state of the high-speed train operation can be established as follows [19]:

$$\frac{\partial \varphi}{\partial t} = \varphi \text{Div} (C_1, C_2) + \delta(z) \left( \nabla^2 \varphi - \text{div} \left( \frac{\nabla \varphi}{|\nabla \varphi|} \right) \right). \quad (5)$$

In equation (5) mentioned above, the symbol  $\varphi$  is used as a chunking function Heaviside to indicate the routine operating state of the high-speed trains in the operating state mode with regard to the pixel sequence distribution, and the function equation  $\delta(z) = (d/dz)H(z)$  is used to indicate the grayscale value of the pixels. Thus, the relevant analysis can be carried out on the basis of the results of data acquisition at the starting point and the ending point of smashing in the volleyball sports.

In this model, a method related to visual fusion is adopted to convert the routine operating state of the high-speed trains in the operating state model into a specific stereo model of human motion for each frame. It is assumed that the specific geometric feature vector of the routine operating state of  $w$  high-speed trains in the operating state as a whole is denoted by the symbol  $e$ , which is further used to reconstruct the distribution of feature points associated with the contours, and thereby calculating the markers for the dynamic features related to the routine operating state of all the high-speed trains in the operating state. The expression formula for the specific operation of the entropy function feature  $d_{mn}^{ij}(x, y)$  of the image block in a window with a size of  $s^2$  in the area can be obtained as follows:

$$d_{mn}^{ij}(x, y) = \begin{cases} \frac{\sum_{k=-s}^{+s} |\theta_m^{ij}(x+k, y+k) - \theta_n^{ij}(x+k, y+k)|}{g(x, y) (\partial \varphi / \partial t)}, & m \neq n. \\ 0, & m = n, \end{cases} \quad (6)$$

In equation (6) mentioned above, the letter  $m$  and letter  $n$  are used as the number of image numbers that mark the routine operating state of the high-speed trains in the operating state; the letter  $i$  and letter  $j$  stand for the relevant sequences, which are used as the specific pixel codes to indicate the routine operating state  $\theta$  of the high-speed trains in the operating state.

### 3. Application of the Intelligent Robot Palletizer Technology in the Optimization Process of High-Speed Train Operation

The visualization of spatial information can be restored to a certain extent. Subsequently, the analysis method of the profile angle for the routine operation status of the high-speed train operation status mode is further explored so as to raise the level of high-speed train skills and tactics, which has gained great attention at the same time. Both the starting point and the ending point in the analysis of the routine operating status of high-speed trains are on the basis of combining the analysis of spatial variation features and the method of three-dimensional reconstruction, as well as the visualization of the data on the routine operating status of high-speed trains [20, 21]. In accordance with the traditional mode, the beginning and the end of the routine operation of high-speed trains are analyzed based on the method of instantaneous attention extraction. The method of extracting Harris features and the method of identifying the edge contours are used to record the routine running state of the high-speed trains as a game image. In addition, the structure of the object can be adjusted to verify the angular distribution of the image points in conjunction with the relevant images of the motion environment. At the same time, the recognition of information and the capacity to synthesize the

information subsequently can be improved. However, the routine operation analysis method for the high-speed train operation status mode is relatively poorly adapted to the departure and destination points as compared to the conventional mode. As the passenger lines for the operation of trains at a high speed are set up in parallel, it is possible to ensure that in most normal operating situations and the majority of emergencies, the trains with upper and lower connections can run independently of each other. In general, only in very rare cases when a line is blocked and vice versa, the flow of traffic will limit the connection up and down to some extent. Thus, the double line can be divided into two separate lines on this basis (Figure 3).

In accordance with the specific schematic diagram provided in Figure 3 mentioned above, the algorithm programming in this paper has improved the line model to a certain extent with regard to the data mode related to high-speed railroad transmission. For example, the distance between the stations and the restricted distance are equally processed to facilitate the subsequent algorithmic search. To some extent, there is no significant difference between the distance of stations and the limit interval distance unless there are otherwise restrictions.

In this paper, the exact arrival and departure time of the traveling train at the train platform is mapped to the information of the flight path data in the three-dimensional space through the relevant method of mapping. As a typical arrangement in the analysis process, the structure diagram of certain dispatching decomposition taking the departure pattern of the high-speed runway into comprehensive consideration is obtained, and the specific train departure mode is shown in Figure 4 as follows.

Through the rapid establishment of a high-speed solution dispatching in the three-dimensional space with search



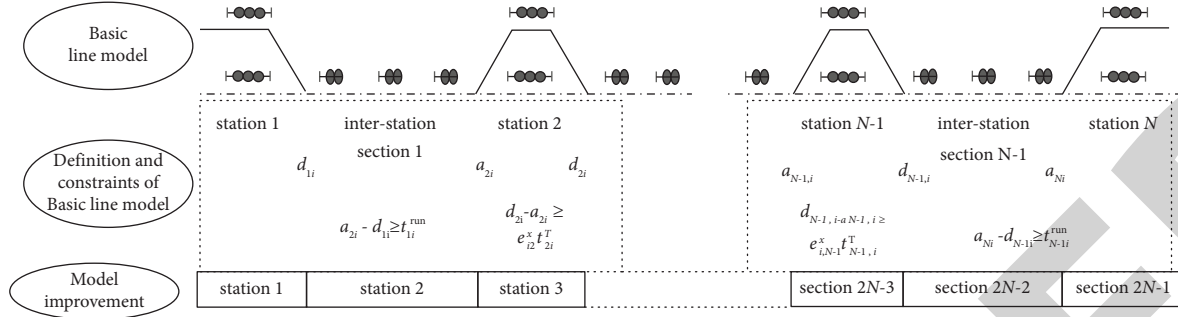


FIGURE 3: High-speed rail dispatch line model.

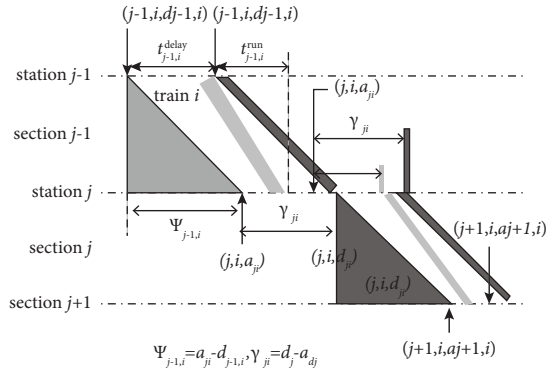


FIGURE 4: Construction of the solution space based on the high-speed rail dispatching model.

area and route path points, the problem generated in the high-speed solution dispatching can be converted into route path points to optimize a series of issues in route search. As the high-speed track for planning is a relatively limited optimization dispatching problem, the different coordinate points on the map space are not a part of a feasible solution, but rather a feasible route path point on the map thus created.

Firstly, the specific occurrence time of train  $i$  at the station  $j-1$  is identified, and the time  $t$  is contained in the interval  $[1, 1440]$ . Subsequently, through the application of certain constraints and the model information that has been acquired so far, the relevant set of generation with feasible path points is carried out for train  $i$  that has been late before it finally arrives at station  $j$ . The details are shown as follows [22]:

$$a_{ji}^a = \left\{ (j, i, t) \mid t \in [a_{ji}^-, a_{ji}^+] \right\}. \quad (7)$$

In the abovementioned set, the earliest time when train  $i$  departs from the beginning and when train  $i$  arrives late at station  $j$  is indicated by the symbol  $a_{ji}^-$ , and during the operation, the minimum running time is identified by the interval  $j-1$  as follows:

$$a_{ji}^- = \max \left\{ d_{j-1,i} + t_{j-1,i}^{\text{run}}, \max_{k \in \text{pre}(i)} (a_{jk} + I_{kij}^a) \right\}. \quad (8)$$

The set  $\text{pre}(i) \subset T$  stands for the sequence of train cars in front of train  $i$  when it arrives at station  $j$ . The interval limit between the time when train  $i$  and train  $k$  arrive at station  $j$ , respectively, is denoted by the symbol  $I_{kij}^a$ . With regard to  $a_{ji}^+$ , that is, the latest time for train  $i$  to arrive at station  $j$ , it can be specifically defined by the following operation:

$$a_{ji}^+ = d_{j-1,i} + \varphi_{j-1,i}. \quad (9)$$

At this point, train  $i$  is already running late. Hence, it has to rush so as to maintain the original schedule. As a result, the subsequent operation time of the train usually have to be shorter than the original schedule  $\varphi_{j-1,i}$  for the purpose of continuously adjusting the time and thus getting to the station at the right time. In some cases that are relatively more complicated, the upper limit of the arrival time can be extended even further, and the details are illustrated in Figure 5 as follows.

The set of grayscale feature edge pixels in the routine operating status screen of the high-speed trains is taken as the set  $a$ , and the segmentation method is combined with the feature function to detect the specific features at the starting point of the routine running operation of the high-speed trains in the operating state to some extent, so that an output value  $S = \{S_1, S_2, \dots, S_{N_A}\}$  can be acquired after effective fusion of the relevant data [23]. Finally, the expression formula is obtained after the detection as follows:

$$p_{i,j}(A) = \begin{cases} \frac{w_{i,j}S}{w_i E_m^{ij}}, & \text{if } i \neq j \text{ and } e_{i,j} \in A, \\ 0, & \text{if } i \neq j \text{ and } e_{i,j} \notin A, \\ 1 - \frac{\sum_{j, e_{i,j} \in A} w_{i,j}S}{w_i E_m^{ij}}, & \text{if } i = j. \end{cases} \quad (10)$$

In the operation state of the motion scene as a whole, the dynamic features of the specific image for the routine operation state of the high-speed trains in the operation state are denoted by the symbol  $g$ . Thus, the distribution level of the feature intensity can comply with the requirement of  $G_{\min} \sim G_{\max}$ . Then, the final fusion parameters for the routine operation state of the high-speed trains in the operation state can be obtained as follows:

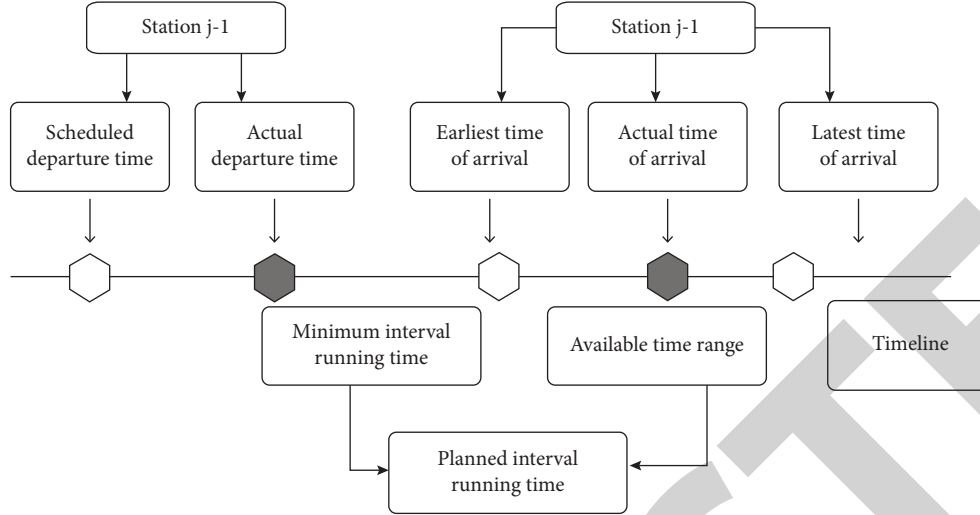


FIGURE 5: Determination of the range for the feasible train operating time.

$$w(i, j) = \frac{1}{Z(i)} \exp\left(-\frac{f(x, y)}{C(i)^2}\right). \quad (11)$$

In equation (11) mentioned above, the function  $Z(i)$  stands for the region specific to the template matching value matched to the feature function within the chunked region, which corresponds to the subregion, and the output value  $g$  corresponding to the multimodule function can be obtained as follows:

$$g = G_{\min} + (G_{\min} - G_{\max})C(i)(G). \quad (12)$$

On the basis of the matching information within the chunked area combined, the extracted starting and ending feature points  $S(k)$  related to the routine operating state can be obtained according to the following equation:

$$S(k) = \varphi \cdot S(k-1) + g(k). \quad (13)$$

Through the extensive forensic analysis performed above, we can construct the model for the routine operating status of high-speed trains in operation. At the same time, the method of information fusion in subspace can be combined to implement effective fusion of data related to the routine operating status of high-speed trains in operation. The results from the fusion of various data can be combined to extract the starting and ending features for the routine operating status of high-speed trains.

#### 4. Simulation and Analysis of the Results

In this paper, a relatively typical downstream section is selected from the Harbin–Dalian high-speed railway for the experimental verification in the relevant operating scene. This section is generally quite busy in the aspect of train movement, and once the train arrives late, the influence of delay can easily result in a state of expanded impact, leading to a series of delays for subsequent trains. Hence, it can be observed that these parts of the interval segments are highly demanding for the presence of dispatchers. In the majority

of practical cases, it is very difficult to make full use of the extra time by manual adjustment of the schedule. Therefore, with regard to this issue on the interval section, the improved algorithm proposed in this paper is more suitable for inspecting the effectiveness and carrying out the related optimization of the train group based on the dispatching algorithm [24, 25].

The operating scenes in the selected cases are composed of 8 different stations, and the experimental simulations are carried out with several trains operating at a high speed on the rail between 20:00 and 22:30. Table 1 below shows the configuration of the specific simulation scenarios, including the minimum station time, the interstation interval, and the minimum operating time within the interstation section for each station.

For the purpose of verifying the effectiveness of the proposed intelligent robot palletizer technology for high-speed train dispatching in an efficient manner, it is assumed in this paper that the train G399 has been late for 15 minutes on the northern highway of Shenyang. As the original train departure time is not excessively late, it will not lead to significant traffic disruption. The following strategy for the adaptation of the train carried out automatically is only applicable to optimal adjustment of the train operation, which can result in a series of delays and late arrival of several subsequent trains D27, D23, G8023, and so on. The results of the specific feasible operational adjustments acquired based on the algorithm are shown in Figure 6 as the follows.

In the operation diagram measured in Figure 6 mentioned above, the red dotted line stands for the original planned route of the initial delayed train, the blue fixed line stands for the actual route of the related affected train, and the other black fixed lines stand for the actual routes of the other trains. Figure 7 below shows the actual delays of each affected train.

Taking into account the advantages of the robot palletizer with intelligence as proposed in this paper, some relevant comparisons with the least dichotomous technique

TABLE 1: Configuration table for the parameters of the simulation scenarios.

Station ID	Minimum station operating time	Interstation interval	Minimum interval operating time
Shenyang North Highway Yard	1	—	—
Liouwangtun Line Station	1	1	9
West Tieling Station	1	2	4
West Kaiyuan Station	1	3	8
West Changtu Station	1	4	5
East Siping Station	1	5	10
South Gongzhuling Station	1	6	9
West Changchun Station	1	7	11

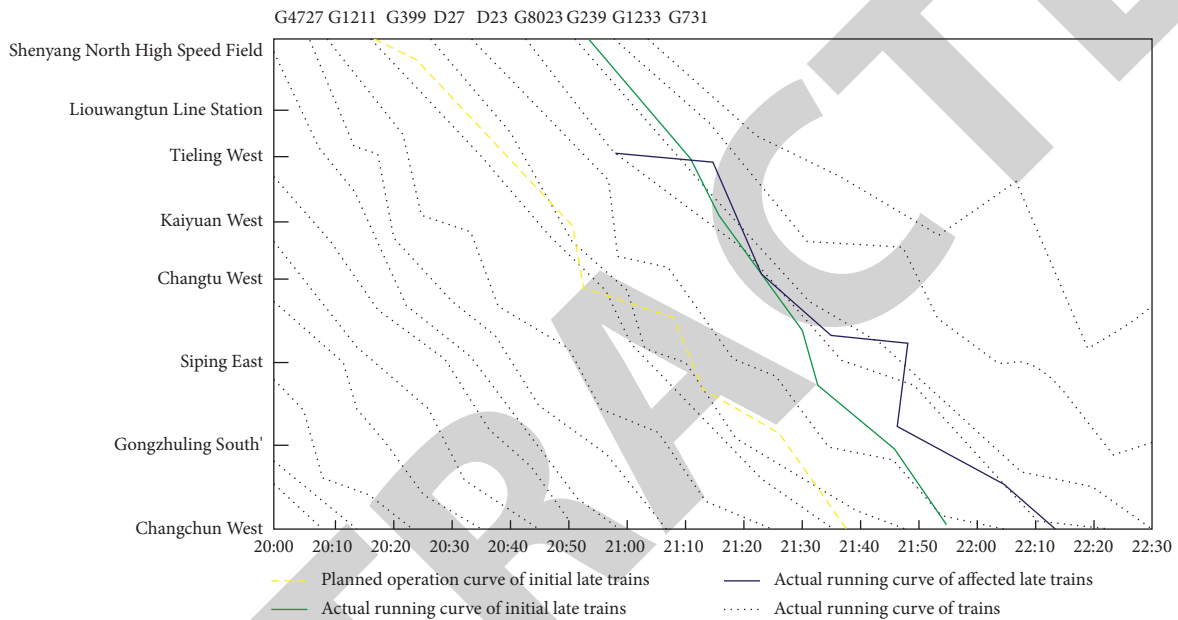


FIGURE 6: Actual running map of the train (scenario 1).

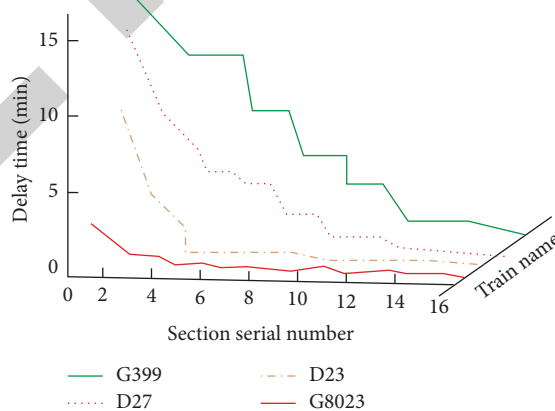


FIGURE 7: Statistics on the delay time of the affected trains (scenario 1).

(basic ACO) and the neural network technology (maximum and minimum ACO) of the robot palletizer with intelligence are carried out [26]. Since the robot palletizer with intelligence is equipped with two sets of  $\alpha - \beta$  parameters in general, the comprehensive statistical analysis of the

combination of parameters similar to  $\alpha - \beta$  can be defined as the following: the relevant combination of parameters 1:  $\alpha$  is equal to 1.3 and  $\beta$  is equal to 1.8; the other relevant combination of parameters 2:  $\alpha$  is equal to 1.1 and  $\beta$  is equal to 1.54. The other parameter values are kept essentially



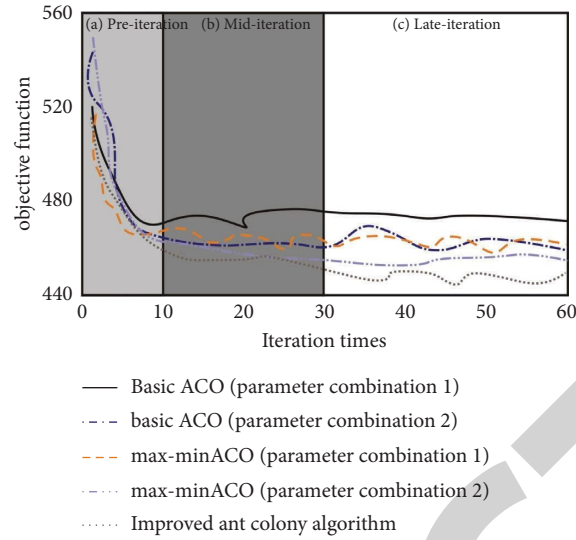


FIGURE 8: Comparison of the simulation results based on various algorithms.

TABLE 2: Comparison of the extraction time/s.

Number of experiments	Methods put forward in this paper	Method in the literature [2]	Method in the literature [3]
100	20.13	55.62	60.95
200	22.14	62.73	62.34
300	21.32	63.94	69.32
400	20.22	69.58	70.89

constant so that the two sets of parameters can correspond to the minimum dichotomy technique and the neural network technique, respectively. Each algorithm is run continuously for about 30 times to obtain the relatively average results of comparative convergence. The final results are shown in Figure 8 as the following, in which some of the results obtained after the comparison indicate that the improved algorithm can obtain relatively better convergence results with a higher efficiency in search.

For the purpose of providing further verification of the effectiveness of the method put forward in this paper, the running states of high-speed trains in operation are compared and analyzed in more details based on the method proposed in this paper, the method established in the literature [2], and the method proposed in the literature [3]. The detailed results are presented in Table 2 as follows.

In accordance with the analysis results reported in Table 2 mentioned above, it can be observed that the evaluation time for the routine operating status of high-speed trains in operation is gradually increased based on the three different methods as the number of iterations of data information increases. In addition, the evaluation time of the routine operating status of high-speed trains in operation is

relatively stable and relatively shorter by using the method put forward in this paper than the extraction time by using the traditional methods.

## 5. Conclusions

For the purpose of ensuring the reliability and security of high-speed trains without changing the original route of the trains, attention has been paid to the high standard of responsiveness in the passage of trains with regard to the continuous progress in the optimization of trains. The power of high-speed trains and the environment friendly features are enhanced by minimizing the mass of high-speed trains through reasonable and feasible design methods. The intelligent robot palletizer technology is used to carry out the optimization of the high-speed train operation in the event of collision. On the premise that the stiffness, modal, and other basic requirements are met, quantitative function analysis is carried out on the car body of the trains to optimize the body structure quality, reduce the thickness of the relevant parts, and achieve the demand for the optimization of the body mechanism operation. Through rectifying and optimizing the delayed trains based on the intelligent robot

palletizer, the operation of the delayed trains can be improved. In this way, the delay time can be calculated to develop the optimal rectification plan. Through the experiment, it is verified that the conversion and self-adjustment based on the theory that time is closely connected to space can improve the dispatching performance of the trains in an effective manner and realize the optimal deployment in the operation of trains.

## Data Availability

The data used to support the findings of this study are included within the article.

## Conflicts of Interest

The authors declare that they have no conflicts of interest.

## Acknowledgments

This research study was sponsored by the following projects—project one: Technical Service of the State Railway Administration Commission, contract no. (2019) 19 and project two: Action Plan for Innovation and Development of Higher Vocational Colleges in Henan Province-JiaoGao, project no. (2017) 895.

## References

- [1] R. Yang, Z. Xia, B. Xu, Y. Liu, L. Zeng, and Z. Chen, "Study on vibration response of surrounding environment caused by high-speed train operation," *IOP Conference Series: Earth and Environmental Science*, vol. 719, no. 4, Article ID 42041, 42112 pages, 2021.
- [2] Y. U. Cuiying, J. Xiang, S. Lin, C. Yuan, and H. Yang, "Influence of double-block ballastless track seam on high-speed train operation safety and maintenance standard research," *Journal of Railway Science and Engineering*, vol. 30, no. 9, Article ID 25902, 25915 pages, 2019.
- [3] M. Zhang and X. Zhu, "Optimization study of jinghu high-speed railway train operation diagram. Journal of Physics," *Conference Series*, vol. 10, no. 6, Article ID 15503, 15512 pages, 2019.
- [4] B. Alejandro, R. Higinio, S. H. Enrique, and C. Cristina, "Methodology for the integration of a high-speed train in maintenance 4.0," *Journal of Computational Design and Engineering*, vol. 13, no. 9, pp. 22–31, 2021.
- [5] J. Zheng, J. Zhang, E. Bjrnson, Z. Li, and B. Ai, "Cell-free massive mimo-ofdm for high-speed train communications," *Maintenance and Reliability*, vol. 62, no. 10, pp. 6436–6447, 2022.
- [6] B. Ning, H. Dong, S. Gao, T. Tang, and W. Zheng, "Distributed cooperative control of multiple high-speed trains under a moving block system by nonlinear mapping-based feedback," *Science China*, vol. 30, no. 1, pp. 2–25, 2018.
- [7] J. Liu, Z. Jiang, and H. Zhou, "Integrated operation and maintenance optimization for high-speed train fleets considering passenger flow," *Eksploatacja i Niezawodność – Maintenance and Reliability*, vol. 24, no. 2, pp. 297–305, 2022.
- [8] J. Liu, J. M. Lee, E. Strock et al., "Technology applications: use of digital health technology to enable drug development," *JCO Clinical Cancer Informatics*, vol. 2, no. 9, pp. 1–12, 2018.
- [9] L. Wang, B. Ai, Y. Niu, X. Chen, and P. Hui, "Energy-efficient power control of train-ground mmwave communication for high speed trains," *IEEE Transactions on Vehicular Technology*, vol. 68, no. 8, pp. 7704–7714, 2019.
- [10] M. Y. Zhang and H. Xiao, "The influence of strong cross wind and track irregularity coupling on high-speed train operation safety," *Railway Standard Design*, vol. 211, no. 20, pp. 171–184, 2018.
- [11] S. Duan and S. Dai, "Application of discrete firefly algorithm in high-speed train operation adjustment," *Computer Engineering and Applications*, vol. 40, no. 8, pp. 892–896, 2018.
- [12] X. J. Chen, Y. L. Wang, X. Long, H. R. Liao, and H. E. You-Quan, "High speed train operation condition monitoring and fault diagnosis," *Value Engineering*, vol. 9, no. 1, pp. 657–666, 2018.
- [13] H. Zhou, Y. Zhou, Y. Liu, and Q. Tang, "Research on high-speed train load spectrum and bridge load effect spectrum," *IOP Conference Series: Earth and Environmental Science*, vol. 719, no. 3, Article ID 32095, 122707 pages, 2021.
- [14] S. Xu, C. Chen, Z. Lin, X. Zhang, J. Dai, and L. Liu, "Review and prospect of maintenance technology for traction system of high-speed train," *Transportation Safety and Environment*, vol. 3, no. 3, pp. 236–252, 2021.
- [15] Y. Rui and R. Mou, "Research on simulation model of high-speed railway train operation plan inspection," *Application Research of Computers*, vol. 9, no. 1, pp. 657–666, 2018.
- [16] X. Z. Zhou, Q. Zhang, T. Wang, P. F. Song, Z. Cao, and P. Department, "An application research on high-speed railway train operation intelligent adjustment algorithm," *Railway Transport and Economy*, vol. 18, no. 2, pp. 97–102, 2018.
- [17] M. A. Xiu-Fei and B. H. Wang, "Research on virtual simulation experimental teaching of high speed railway train operation control system," *Modern Computer*, vol. 26, no. 36, Article ID 36732, 36753 pages, 2018.
- [18] Z. Wang, Y. Song, Z. Yin, R. Wang, and W. Zhang, "Random response analysis of axle-box bearing of a high-speed train excited by crosswinds and track irregularities," *IEEE Transactions on Vehicular Technology*, vol. 66, no. 11, Article ID 10607, 10617 pages, 2019.
- [19] D. T. Wang, F. R. Wang, and K. Huang, "A simulation model for tracking operation of high-speed railway train group based on cellular automata," *Railway Standard Design*, vol. 7, no. 5, pp. 252–268, 2018.
- [20] Q. Yu and Z. Hou, "Adaptive fuzzy iterative learning control for high-speed trains with both randomly varying operation lengths and system constraints," *IEEE Transactions on Fuzzy Systems*, A Publication of the IEEE Neural Networks Council, vol. 759, no. 2, , pp. 143–144, 2021.
- [21] L. I. Kun-Yang, H. H. Chen, J. S. Guo, and Q. Y. Wang, "Research on automatic train operation algorithm for high-speed trains based on sliding mode active disturbance rejection control," *Modern Computer*, vol. 121, no. 1, pp. 107–115, 2019.
- [22] L. I. Yu and Y. I. Tiehang, "Analysis on operation adaptability of traction motor cooling fan for high speed train on kunxiang line," *Railway Locomotive and Motor Car*, vol. 30, no. 9, Article ID 25902, 25915 pages, 2019.
- [23] C. H. Shao, L. Miao-Miao, C. C. Zou, and N. I. Shao-Quan, "A design on beijing-shanghai high-speed railway train stop schedule based on cyclic train timetable," *Railway Transport and Economy*, vol. 10, no. 6, Article ID 15503, 15512 pages, 2018.

- [24] C. Wang, S. S. Wang, P. Wang, X. J. Wang, and L. Chen, "A study on the optimization model and algorithm for the integration of high speed train operating diagram and emu utilization," *Railway Transport and Economy*, vol. 13, no. 9, pp. 22–31, 2018.
- [25] D. J. Chen, T. Gao, L. V. Miao-Miao, and W. U. Kai-Teng, "Study on optimization of train operation plans for high speed railway," *Computer Simulation*, vol. 62, no. 10, pp. 6436–6447, 1018.
- [26] M. A. Xiaona, A. Zhu, and Y. Duan, "Energy-saving operation optimization of high-speed trains using firefly algorithm," *Journal of Huaqiao University(Natural Science)*, vol. 30, no. 1, pp. 2–25, 2019.

RETRACTED