

Retraction

Retracted: Research on Intelligent Pick-Up Route Planning of a Logistics Cycle Automatic Robot

Journal of Sensors

Received 19 December 2023; Accepted 19 December 2023; Published 20 December 2023

Copyright © 2023 Journal of Sensors. This is an open access article distributed under the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

This article has been retracted by Hindawi following an investigation undertaken by the publisher [1]. This investigation has uncovered evidence of one or more of the following indicators of systematic manipulation of the publication process:

- (1) Discrepancies in scope
- (2) Discrepancies in the description of the research reported
- (3) Discrepancies between the availability of data and the research described
- (4) Inappropriate citations
- (5) Incoherent, meaningless and/or irrelevant content included in the article
- (6) Manipulated or compromised peer review

The presence of these indicators undermines our confidence in the integrity of the article's content and we cannot, therefore, vouch for its reliability. Please note that this notice is intended solely to alert readers that the content of this article is unreliable. We have not investigated whether authors were aware of or involved in the systematic manipulation of the publication process.

Wiley and Hindawi regrets that the usual quality checks did not identify these issues before publication and have since put additional measures in place to safeguard research integrity.

We wish to credit our own Research Integrity and Research Publishing teams and anonymous and named external researchers and research integrity experts for contributing to this investigation.

The corresponding author, as the representative of all authors, has been given the opportunity to register their agreement or disagreement to this retraction. We have kept a record of any response received.

References

- [1] Q. Hu and Y. Fan, "Research on Intelligent Pick-Up Route Planning of a Logistics Cycle Automatic Robot," *Journal of Sensors*, vol. 2022, Article ID 4268589, 8 pages, 2022.

Research Article

Research on Intelligent Pick-Up Route Planning of a Logistics Cycle Automatic Robot

Qinlong Hu  and Yimin Fan 

College of Management Science, Chengdu University of Technology, Chengdu, Sichuan 610059, China

Correspondence should be addressed to Yimin Fan; 20160765@ayit.edu.cn

Received 29 May 2022; Revised 28 June 2022; Accepted 7 July 2022; Published 19 July 2022

Academic Editor: Haibin Lv

Copyright © 2022 Qinlong Hu and Yimin Fan. This is an open access article distributed under the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

In order to improve the efficiency of a logistics cycle robot picking up goods, a path planning algorithm based on artificial intelligence was proposed. After analyzing the particle swarm optimization algorithm, the particle swarm optimization algorithm is optimized and improved and the path planning of a single robot is obtained. On this basis, a multipopulation particle swarm optimization (CMMPPSO) algorithm is proposed. The results show that the JMPOPSO algorithm is more accurate than the BPSO algorithm and the maximum fitness optimized by the BPSO algorithm is 1.59, while the maximum fitness optimized by the JMPOPSO algorithm is 1.98. The path optimized by the CMMPPSO algorithm based on JMPOPSO is better than that optimized by the CMMPPSO algorithm based on BPSO, shortening by about 25% and shortening the time by about 30. Simulation experiments verify the effectiveness of the CMMPPSO algorithm.

1. Introduction

Robots are widely used in industrial production and people's life. They can help people complete all kinds of hard, dangerous, and repetitive work, such as safety detection of nuclear equipment, complex medical diagnosis, glass exterior wall wiping, and assembly line operation [1]. The invention and popularization of robots have provided a strong driving force for the development of the world economy. Academician Zhao Lv once pointed out that "the birth of robots and the establishment and development of robotics are the most convincing achievements of automatic control in this century and the major achievements of human scientific and technological progress in the 20th century" [2]. The application of robots reflects the industrial automation level of a country to a certain extent [3]. With the continuous maturity and development of computer technology, intelligent control theory, VLSI, pattern recognition technology, sensor technology, and structure, robot technology has also entered a new development stage. Intellectualization and

humanization have become the main trend of the development of the robot industry in the future [4].

Based on the new herd intelligent optimization algorithm, particle swarm optimization (PSO) is a simple mathematical model, is easy to use, and requires no objective optimization function to distinguish, differentiate, and control. The algorithm can be used in most application fields that need optimization, among which the fields with great potential mainly include power system control, pattern recognition, signal processing, image classification, fuzzy controller design, and robot path planning. The improved algorithm can obtain a better path, as shown in Figure 1 for the control system of the logistics handling robot. However, the particle swarm optimization algorithm has the disadvantage of easy convergence to the local optimal solution, that is, it is prone to premature convergence. This problem has prompted scientists to optimize the animal algorithm and use it to plan the path of mobile robots. When using the particle optimization algorithm to solve the problem of mobile robot planning, in general, the best way is not the

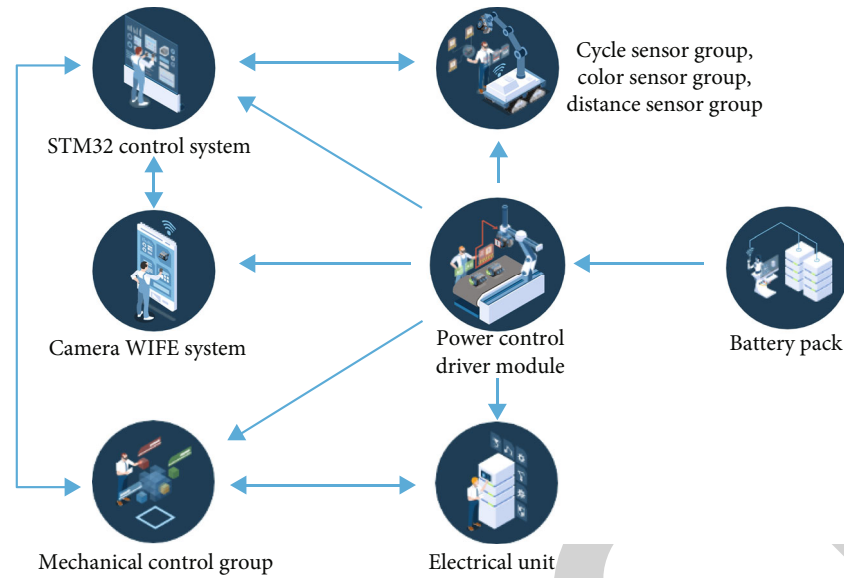


FIGURE 1: A manufacturing method of an intelligent logistics handling robot control system.

best way in the world, but the right way. Therefore, good planning is a very important part of research.

2. Literature Review

A mobile robot is a kind of robot with high intelligence, and it is also the focus and frontier field of intelligent robot research. As an important group in the robot family, mobile robots have made many remarkable achievements in the past decades [5]. Developed countries such as Europe, America, and Japan have studied mobile robot technology earlier, and the mobile robot technology of these countries represents the highest level in the world to a certain extent [6]. In 1966, the artificial intelligence center at the Stanford Research Center (ACSRC) successfully developed the world's first mobile machine—Shakey. It has certain observation ability to the environment and independent modeling ability, but it needs to use multiple large computers to control it [7]. Domestic scholars study mobile robot technology later than developed countries such as Europe and the United States, but after more than 40 years of unremitting efforts, they have also made many great achievements [8]. Zhao and others developed a new type of special robot—independent 4WD all-terrain explosive disposal robot. The independent 4WD all-terrain explosive disposal robot is mainly used in harsh environments such as wild mountains and can check, transport, and detonate suspected explosives [9]. Foroughi and others proposed the Voronoi diagram. At first, the Voronoi diagram was used to solve the proximity problem of plane points in mathematics but some scholars soon introduced it into robot path planning. In this method, the Voronoi diagram can be used to describe the networked structure of feasible areas in the robot working environment [10]. Cai and Zheng proposed robot path planning based on the grid method, which was proposed relatively early and widely used. They further tested and analyzed the reliability of applying the grid method to solve path planning problems

[11]. Zheng and Cai proposed a real-time robot path planning method based on the concept of the artificial potential field. This method can avoid collision with obstacles in real time in a complex environment. This method has been successfully applied to the cosmos system of a PUMA robot [12]. Sennan and others proved that Hopfield-type nonlinear simulation neurons are very effective for robot path planning and obstacle avoidance. From any starting position to any target position, the artificial neural network system can successfully avoid static and dynamic obstacles of arbitrary shape and quickly provide an appropriate path [13]. Kaya and others introduced the fuzzy control theory into mobile robot path planning and proposed a robot path planning method based on multiple motion instruction sets. This method uses fuzzy rules to guide the motion of the robot, avoids the disadvantage of poor real-time performance of mobile robot path planning due to large amount of calculation, and achieved good simulation results [14]. Pahnehkoei and others combined the improved genetic algorithm with the Dijkstra algorithm (DA) to optimize the robot path and designed a heuristic way to generate the initial population. As a swarm intelligence optimization algorithm, the ant colony algorithm is also widely used in robot path planning [15]. Wu and Song combined the ant colony algorithm with a probabilistic roadmap planner (PRM) to plan the robot path, which can reduce the path planning time to an acceptable range [16].

Robot navigation technology is one of the most important technologies in mobile robots. Robot navigation technology mainly includes the following three aspects: robot positioning, task planning, and path planning. Robot positioning is the key technology to realize autonomous navigation. This technology requires a mobile robot to determine its position and direction when its initial position is known or unknown. Task planning refers to the mobile robot completing some specific tasks in a specific time and space. Path planning requires the mobile robot to reach the

target position from the starting position at the least cost (such as the shortest walking path, the least walking time, and the lowest walking energy consumption). In this process, the collision between the robot and obstacles and between the robot and the robot should be avoided [17].

The research on robot path planning technology can reduce the working time of the robot, improve the working efficiency of the robot, and reduce some unnecessary wear and consumption of the robot, so as to achieve the purpose of saving resources and reducing costs [18]. In some special environments, a good robot path planning technology is particularly important, such as flood fighting and rescue, explosive disposal, rescue, and military reconnaissance. The use of good path planning technology can make the mobile robot quickly reach the designated target position. In order to save and ensure the safety of people's lives and property and win valuable time, the research on path planning technology can also reduce the uncertainty of the robot in the movement process and enhance the flexibility of the mobile robot, so as to enhance the intelligent level of the mobile robot and lay a solid foundation for the further wide use of the mobile robot in industrial production and people's life [19]. Robot path planning technology is the basis for the development of various high-performance mobile robots. Therefore, the research on robot path planning technology has very important theoretical and practical significance [20].

3. Research Methods

3.1. Particle Swarm Optimization Algorithm. The particle swarm optimization algorithm is a swarm intelligence evolutionary method proposed by Dr. Kennedy and Professor Eberhart [21, 22]. Like the genetic algorithm, evolutionary programming (EP), evolutionary strategies (ES), and other evolutionary algorithms, the algorithm is a direct search algorithm based on population evolution and does not need to rely on gradient, curvature, and other information.

In the particle swarm optimization algorithm, the calculation formula of $k + 1$ iteration of each particle i in the d dimension is as follows (1):

$$\begin{aligned} v_{id}^{(k+1)} &= v_{id}^{(k)} + c_1 \cdot \text{rand}() \cdot (p_{id}^{(k)} - x_{id}^{(k)}) + c_2 \cdot \text{rand}() \cdot (p_{gd}^{(k)} - x_{id}^{(k)}), \\ x_{id}^{(k+1)} &= x_{id}^{(k)} + v_{id}^{(k+1)}. \end{aligned} \quad (1)$$

Among them, c_1 and c_2 are called learning factors, which are used to adjust the step length of particles flying towards the optimal value of the individual position and the optimal value of the group position, respectively [2, 23]. $p_{id}^{(k)}$ represents the optimal value of individual position of the particle, $p_{gd}^{(k)}$ represents the optimal value of the group position, d ($1 \leq d \leq D$) represents the dimension of the position vector and velocity vector, and $\text{rand}()$ is a random number between (0,1).

When generating a new particle position, the constraint conditions of the particle velocity vector must also be met, as shown in formula (2):

$$\left| v_{id}^{(k+1)} \right| \leq V_{\max}. \quad (2)$$

In formula (2), V_{\max} represents the limiting constant of the velocity vector. The velocity vector constraint condition can also be expressed as equation (3):

$$\left| x_{id}^{(k+1)} - x_{id}^{(k)} \right| \leq V_{\max}. \quad (3)$$

This is also the Lipschitz condition of the dynamic system [3].

In the particle swarm optimization algorithm, the update function of the optimal value of the individual position of the particle is defined as equation (4):

$$p_{id}^{(k)} = \begin{cases} x_i^{(k)}, & f(x_i^{(k)}) \leq f(p_{id}^{(k-1)}), \\ p_{id}^{(k-1)}, & f(x_i^{(k)}) > f(p_{id}^{(k-1)}). \end{cases} \quad (4)$$

In the particle swarm optimization algorithm, the update function of the optimal position of the whole population is defined as equation (5):

$$\begin{aligned} p_{gd}^{(k)} &\in \{p_{1d}^{(k)}, p_{2d}^{(k)}, \dots, p_{md}^{(k)} \mid f(p_{id}^{(k)})\} \\ &= \min \{f(p_{1d}^{(k)}), f(p_{2d}^{(k)}), \dots, f(p_{md}^{(k)})\}, \end{aligned} \quad (5)$$

In formulas (4) and (5), $f()$ represents the fitness function value.

The steps of the particle swarm optimization algorithm are shown in Figure 2.

3.2. Path Planning of a Single Machine Robot Based on the Improved Particle Swarm Optimization (JMPOPSO) Algorithm. When using the particle optimization algorithm to improve the performance of the robot cell, the method can be estimated according to the physical function. Creating an outflow directly affects whether the algorithm can find a good way. The energy function is designed to improve the flow. For the optimization index method, the long road is the first index. Of course, other performance measures such as road safety and road smoothness should be determined. The performance force described in this paper includes three performance measures.

(1) Path length fit1

$$\begin{aligned} \text{Fit1} &= \sum_{j=0}^N |p_j p_{j+1}| = \sqrt{d + (y_s - y_1)^2} \\ &+ \sum_{j=1}^{N-1} \sqrt{d + (y_{j+1} - y_j)^2} + \sqrt{d + (y_g - y_N)^2}. \end{aligned} \quad (6)$$

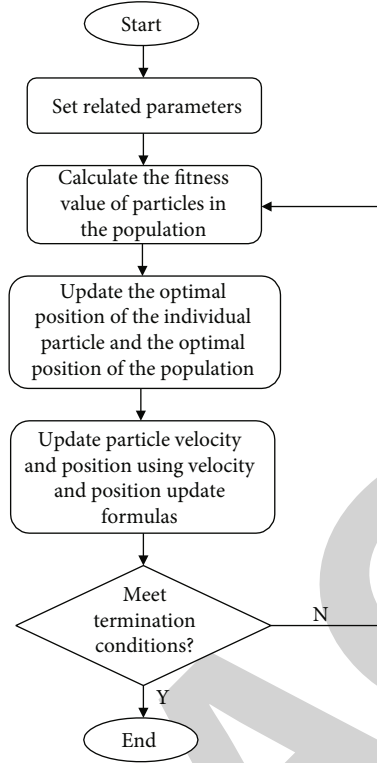


FIGURE 2: Flow chart of the particle swarm optimization algorithm.

In formula (6), $d = (x_s - x_g / N + 1)^2$ is the fixed value, which represents the length of each horizontal axis in the newly established coordinate system, $N + 1$ is the number of segments evenly divided by the vertical line, and (x_s, y_s) and (x_g, y_g) represent the coordinates of the starting point and target point in the robot path planning, respectively

(2) Path security fit2

The safety performance of the path can be expressed by the number of segments intersecting the obstacle in a complete path, as shown in equation (7).

$$\text{Fit1} = \begin{cases} n, & \text{number of sections where the path intersects the obstacle, the path is not feasible,} \\ 0, & \text{the path does not intersect with the obstacle, the path is feasible.} \end{cases} \quad (7)$$

(3) Smoothness of path fit3

The walking distance between mobile robots should be as small as possible and the walkway should be as smooth as possible. Only in this way can the wear and tear caused by the robot rotation be reduced. Therefore, as shown in equation (8), the design of the robot method must take into account the optimized method uniformity.

$$\text{Fit3} = \frac{\left(\sum_{j=0}^N \beta(l_j, l_{j+1}) \right)}{N}. \quad (8)$$

In formula (8), $\beta(l_j, l_{j+1})$ represents the included angle between two path segments l_j and l_{j+1} and N represents the

number of included angles. The greater the included angle between path segments, the smoother the optimized path.

Considering the performance indexes of the abovementioned three path optimizations, the fitness function $f_1(p)$ is designed as equation (9):

$$f_1(p) = \frac{N + 1 - \omega_2 \cdot \text{fit2} + \omega_3 \cdot \text{fit3}}{\omega_1 \cdot \text{fit1}}. \quad (9)$$

In formula (9), ω_1 , ω_2 , and ω_3 are the adjustment parameters of path length fit1, path security fit2, and path smoothness fit3, respectively, so that the three performance indexes can be unified in the order of magnitude. When

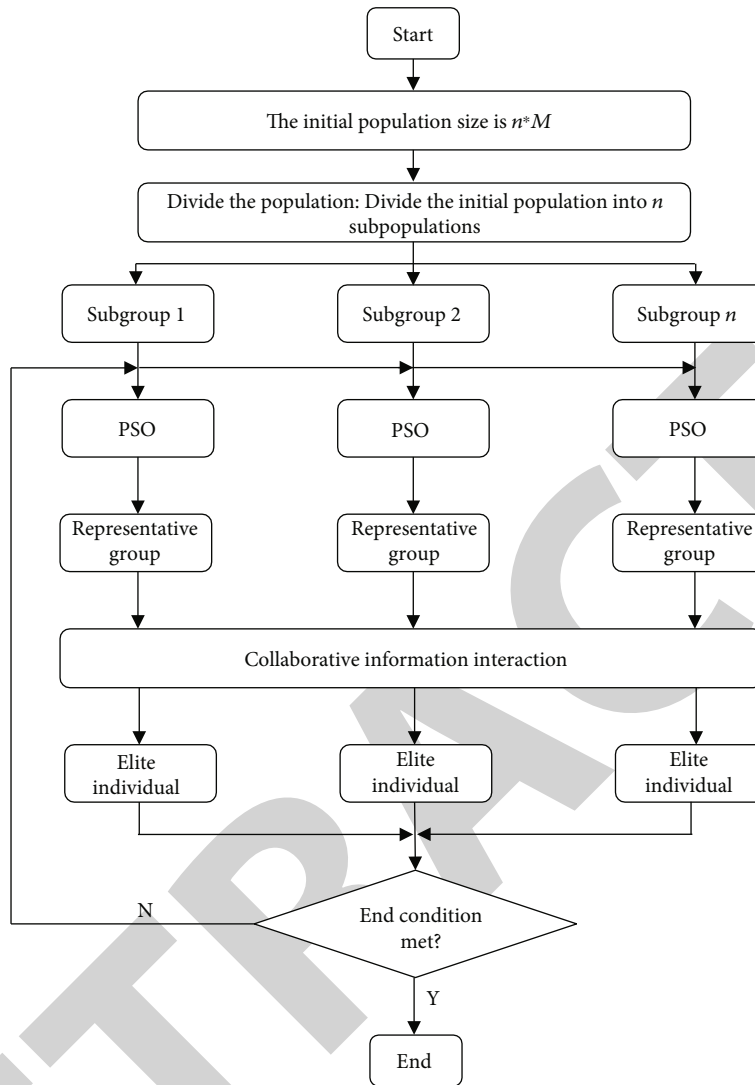


FIGURE 3: Flow chart of the CMMPPSO algorithm.

the fitness function value $f_1(p)$ is larger, the optimized solution is better, that is, the optimized path quality is better.

3.3. Multiswarm Particle Swarm Optimization (CMMPPSO) Algorithm Based on the Collaborative Mechanism. Previously, the use of single-robot planning based on particle optimization algorithms has been shown, but not the use of multirobot planning. To solve the problem of multiple robotic methods, a synergistic mechanism is integrated into the PSO algorithm and multiple public particle optimization based on the synergy (CMPPSO) algorithm is planned. Because multiple robots work in the same environment, there is a relationship of competition and cooperation between robots. Firstly, the multirobot path planning problem is decomposed into several subproblems for solution and the initial population is divided according to the number of robots. Each subpopulation corresponds to a robot's individual evolutionary optimization. Each robot is optimized separately by the corresponding subpopulation, and then, the representative individual group is selected according to the fitness evaluation function. The selected represen-

tative individual group is operated by collaborative information interaction, and the combination with the best fitness value is selected as the elite individual, so that each optimized path meets the objective constraints and outputs the final optimal combination. The flow of CMMPPSO algorithm is shown in Figure 3.

In the process of multirobot path planning, because there are multiple mobile robots in the same working environment and the starting point and target point of each robot are different, the path optimized by the algorithm may cross in the same space at the same time. When the robot moves along the optimized path, there will be a collision between the robot and the robot.

If there are two robots moving from the starting point to the starting point at the same speed, it can be judged whether there is a collision between the two robots at the same time:

$$d_{\text{cross}} = \text{cross} - \text{beg}. \quad (10)$$

In formula (10), cross represents the position of the intersection between the optimized two paths, beg is the starting

TABLE 1: Comparison of path planning performance based on the BPSO algorithm and JMPOPSO algorithm.

Algorithm	Maximum	Average value	Minimum value	Average time (S)
BPSO algorithm	1.59	1.43	1.17	7.56
JMPOPSO algorithm	1.98	1.76	1.34	9.39

point of the robot, and d_{cross} represents the distance from the starting point to the intersection of the two paths moving along the optimized path.

If the d_{cross} of the two robots are the same, it means that the two robots will collide when moving along the optimized path and the number of collisions between paths will be counted; otherwise, there will be no collision.

Here, a collision evaluation function fit4 is designed to evaluate the collision between each group of paths optimized in the multirobot system. The specific design is shown in formula (11):

$$\text{Fit4} = \begin{cases} 1, & \text{no collision between robots,} \\ 10 * \text{Num_cross}, & \text{collision between robots.} \end{cases} \quad (11)$$

In formula (11), Num_cross represents the number of collisions between each group of paths optimized in the multirobot system.

The construction of fitness function $f_1(p)$ is the same as the fitness function introduced in the previous article. The construction of fitness function $f_2(p)$ for collaborative information interaction is shown in formula (12):

$$f_2(p) = (f_{11}(p) + f_{12}(p) + \dots + f_{1i}(p) + \dots + f_{1n}(p)) \cdot \frac{1}{\text{fit4}}. \quad (12)$$

The fitness evaluation function $f_{1i}(p)$ is the same as the previously established fitness evaluation function $f_1(p)$, where $1 < i \leq n$, n is the number of robots, and fit4 is the collision evaluation function between paths of the multirobot system. In collaborative information interaction, the larger the value of fitness function $f_2(p)$, the better the representative individual of the combination and the best representative individual combination is set as the elite individual.

4. Result Analysis

4.1. Path Planning of a Single Machine Robot Based on the Improved Particle Swarm Optimization (JMPOPSO) Algorithm. In order to verify the performance of the JMPOPSO algorithm, this paper compares the JMPOPSO algorithm with the BPSO algorithm and makes 100 experiments on the two algorithms, respectively. Table 1 records the maximum, average, minimum, and average running time of the fitness optimized by the two particle swarm optimization algorithms.

As shown in Figure 4, from the comparison, we can see that the BPSO algorithm searches for a more accurate fitness value than the BPSO algorithm. The maximum fitness value

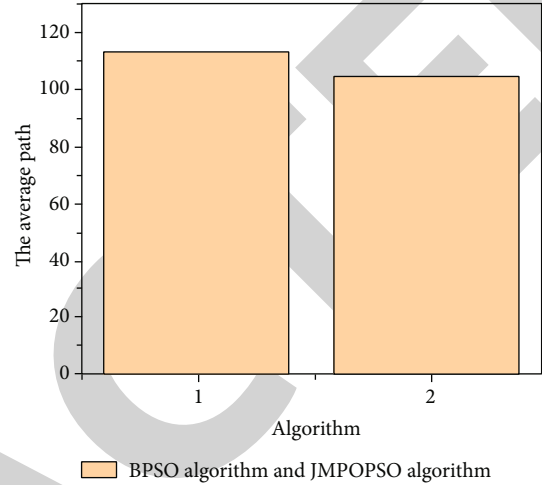


FIGURE 4: Average length of path planning based on the BPSO algorithm and JMPOPSO algorithm.

optimized by the BPSO algorithm is 1.59, while the maximum fitness value optimized by the JMPOPSO algorithm is 1.98. And in 100 experiments, the average value obtained by the JMPOPSO algorithm is higher than that of the BPSO algorithm. The average value obtained by the BPSO algorithm is 1.43, while the average value obtained by the JMPOPSO algorithm is 1.76, indicating that the JMPOPSO algorithm has stronger global search ability. The average path length of the JMPOPSO algorithm is about 7% shorter than that of the BPSO algorithm, and the running time is about 20%.

4.2. Multiswarm Particle Swarm Optimization (CMMPPSO) Algorithm Based on the Collaborative Mechanism. In order to verify the effectiveness of the algorithm, simulation experiments are carried out in this paper. Three mobile robots R1, R2, and R3 are set in the working environment, and five circular obstacles with radius $r = 2$ are set. In the simulation environment, the starting position and target position coordinates of the three mobile robots are set as shown in Table 2.

Figures 5 and 6 show the time and average path length of multirobot path planning based on the CMMPPSO algorithm based on BPSO and the CMMPPSO algorithm based on JMPOPSO, respectively.

The simulation results show that the path optimized by the CMMPPSO algorithm based on JMPOPSO is better than that optimized by the CMMPPSO algorithm based on BPSO, which is shortened by about 25% and the time is shortened by about 30%. Simulation experiments verify the effectiveness of the CMMPPSO algorithm.

TABLE 2: Setting of the starting point and target point of the mobile robot in the simulation environment.

	Robot	Starting point	Target point
Simulation environment settings	R1	S1(13,12)	T1(26,28)
	R2	S2(18,11)	T2(18,29)
	R3	S3(23,12)	T3(10,28)

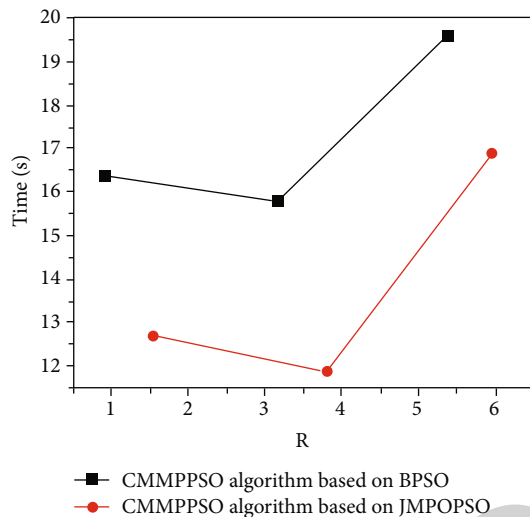


FIGURE 5: Algorithm time.

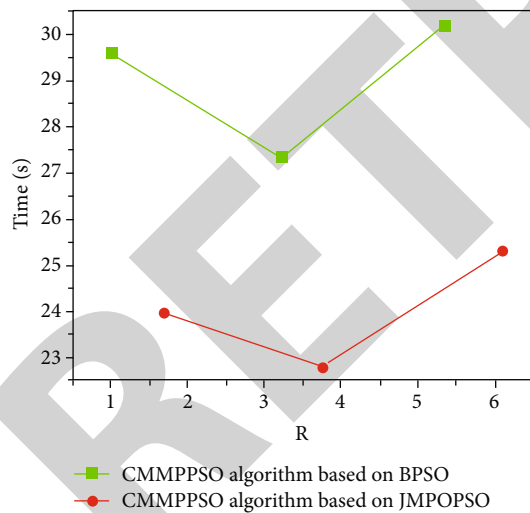


FIGURE 6: Average path length.

5. Conclusion

With in-depth study of herd intelligent technology, mobile robot planning technology has reached unprecedented heights. The particle herd optimization algorithm is a new bionic optimization algorithm. This line only focuses on improving the particle optimization algorithm, using optimization algorithms to improve the robotics process, and achieving positive results. This sentence focuses on the following issues.

First, we recommend the particle flock optimization (JMPOPSO) algorithm based on the jump mechanism and traction operation based BPSO algorithm. The JMPOPSO algorithm is more powerful in the world of search engine and integration faster.

The JMPOPSO algorithm was then used in the design of the same robotic method, with the disadvantage that it was difficult to improve the global process using the BPSO algorithm. First, the robot's office is modeled, and then, the fitness program is decided in order to improve the process. Finally, the method has been improved by the JMPOPSO algorithm based on the robust design. The simulation results show that the JMPOPSO algorithm is capable of better global research, more exploration, and better methods.

Finally, when studying the multirobot path planning problem, this paper proposes a multiswarm particle swarm optimization (CMMPPSO) algorithm based on the collaborative mechanism. In this algorithm, the multirobot path planning problem is decomposed into multiple single robot path planning problems and each subpopulation optimizes a robot separately. Select representative individuals from each subpopulation to coordinate information interaction, so as to select elite individuals as the path of multirobot system optimization. In the optimization process, not only the collision between robots and obstacles but also the collision between robots are considered and the collision evaluation function between paths is established. Simulation results show that the algorithm can better realize multirobot path planning.

Data Availability

The data used to support the findings of this study are available from the corresponding author upon request.

Conflicts of Interest

The authors declare that they have no conflicts of interest.

References

- [1] M. Shu, G. Chen, and Z. Zhang, "3d point cloud-based indoor mobile robot in 6-dof pose localization using a wi-fi-aided localization system," *Access*, vol. 9, pp. 38636–38648, 2021.
- [2] Z. Lv, Y. Han, A. K. Singh, G. Manogaran, and H. Lv, "Trustworthiness in industrial IoT systems based on artificial intelligence," *IEEE Transactions on Industrial Informatics*, vol. 17, no. 2, pp. 1496–1504, 2021.
- [3] Z. Lv, W. Kong, X. Zhang, D. Jiang, H. Lv, and X. Lu, "Intelligent security planning for regional distributed energy Internet," *IEEE Transactions on Industrial Informatics*, vol. 16, no. 5, pp. 3540–3547, 2020.
- [4] P. Singh, A. Nandanwar, L. Behera, N. K. Verma, and S. Nahavandi, "Uncertainty compensator and fault estimator-based exponential supertwisting sliding-mode controller for a mobile robot," *IEEE Transactions on Cybernetics*, vol. 99, pp. 1–14, 2021.
- [5] M. Ou, H. Sun, Z. Zhang, and S. Gu, "Fixed-time trajectory tracking control for nonholonomic mobile robot based on

- visual servoing,” *Nonlinear Dynamics*, vol. 108, no. 1, pp. 251–263, 2022.
- [6] S. Liu, S. Li, L. Pang, J. Hu, and X. Zhang, “Autonomous exploration and map construction of a mobile robot based on the tghm algorithm,” *Sensors*, vol. 20, no. 2, p. 490, 2020.
- [7] X. Zhou, Y. Li, and W. Liang, “CNN-RNN based intelligent recommendation for online medical pre-diagnosis support,” *IEEE/ACM Transactions on Computational Biology and Bioinformatics*, vol. 18, no. 3, pp. 912–921, 2021.
- [8] X. Zhou, W. Liang, K. Wang, R. Huang, and Q. Jin, “Academic influence aware and multidimensional network analysis for research collaboration navigation based on scholarly big data,” *IEEE Transactions on Emerging Topics in Computing*, vol. 9, no. 1, pp. 246–257, 2021.
- [9] X. Zhao, B. Tao, and H. Ding, “Multi-mobile robot cluster system for robot machining of large-scale workpieces,” *IEEE/ASME Transactions on Mechatronics*, vol. 27, no. 1, pp. 561–571, 2021.
- [10] F. Foroughi, Z. Chen, and J. Wang, “A cnn-based system for mobile robot navigation in indoor environments via visual localization with a small dataset,” *World Electric Vehicle Journal*, vol. 12, no. 3, pp. 122–134, 2021.
- [11] Z. Cai and X. Zheng, “A private and efficient mechanism for data uploading in smart cyber-physical systems,” *IEEE Transactions on Network Science and Engineering (TNSE)*, vol. 7, no. 2, pp. 766–775, 2020.
- [12] X. Zheng and Z. Cai, “Privacy-preserved data sharing towards multiple parties in industrial IoTs,” *IEEE Journal on Selected Areas in Communications (JSAC)*, vol. 38, no. 5, pp. 968–979, 2020.
- [13] S. Sennan, S. Ramasubbareddy, S. Balasubramaniam, A. Nayyar, and N. A. Hikal, “T2fl-pso: type-2 fuzzy logic-based particle swarm optimization algorithm used to maximize the lifetime of Internet of things,” *IEEE Access*, vol. 9, pp. 63966–63979, 2021.
- [14] S. Kaya, A. Gümüü, B. B. Aydılek, Z. H. Karaizmeli, and M. E. Tenekeci, “Solution for flow shop scheduling problems using chaotic hybrid firefly and particle swarm optimization algorithm with improved local search,” *Soft Computing*, vol. 25, no. 10, pp. 7143–7154, 2021.
- [15] S. M. A. Pahnehkolaei, A. Alfi, and J. A. T. Machado, “Convergence boundaries of complex-order particle swarm optimization algorithm with weak stagnation: dynamical analysis,” *Nonlinear Dynamics*, vol. 106, no. 1, pp. 725–743, 2021.
- [16] Y. Wu and Q. Song, “Improved particle swarm optimization algorithm in power system network reconfiguration,” *Mathematical Problems in Engineering*, vol. 2021, 10 pages, 2021.
- [17] Z. Liu, Z. Qin, P. Zhu, and H. Li, “An adaptive switchover hybrid particle swarm optimization algorithm with local search strategy for constrained optimization problems,” *Engineering Applications of Artificial Intelligence*, vol. 95, no. 10, article 103771, 2020.
- [18] P. Lakshminarayana and T. V. Sureshkumar, “Automatic generation and optimization of test case using hybrid cuckoo search and bee colony algorithm,” *Journal of Intelligent Systems*, vol. 30, no. 1, pp. 59–72, 2021.
- [19] W. Zhao, G. Liu, S. Wang, M. Gao, and D. Lv, “Real-time estimation of gps-bds inter-system biases: an improved particle swarm optimization algorithm,” *Remote Sensing*, vol. 13, no. 16, p. 3214, 2021.
- [20] L. Wang, X. Jin, and G. Xu, “Particle swarm optimization algorithm with dynamic inertia factors for inversion of fault parameters,” *Wuhan Daxue Xuebao (Xinxi Kexue Ban)/Geomatics and Information Science of Wuhan University*, vol. 46, no. 4, pp. 510–519, 2021.
- [21] O. A. Wahab, A. Mourad, H. Otrok, and T. Taleb, “Federated machine learning: survey, multi-level classification, desirable criteria and future directions in communication and networking systems,” *IEEE Communications Surveys & Tutorials*, vol. 23, no. 2, pp. 1342–1397, 2021.
- [22] H. Sami, A. Mourad, and W. El Haj, “Vehicular-OBUs-as-onDemand-fogs: resource and context aware deployment of containerized micro-services,” *In the IEEE/ACM Transactions on Networking*, vol. 28, no. 2, pp. 778–790, 2020.
- [23] J. Li, S. Jin, C. Wang, J. Xue, and X. Wang, “Weld line recognition and path planning with spherical tank inspection robots,” *Journal of Field Robotics*, vol. 39, no. 2, pp. 131–152, 2022.