

Corrigendum

Corrigendum to “Effects of the Splitter Blade on the Performance of a Pump-Turbine in Pump Mode”

Guidong Li , Yang Wang, Puyu Cao, Jinfeng Zhang, and Jieyun Mao

National Research Center of Pumps, Jiangsu University, Zhenjiang 212013, Jiangsu, China

Correspondence should be addressed to Guidong Li; liguidong1201@163.com

Received 5 February 2019; Accepted 10 February 2019; Published 4 March 2019

Copyright © 2019 Guidong Li et al. This is an open access article distributed under the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

In the article titled “Effects of the Splitter Blade on the Performance of a Pump-Turbine in Pump Mode” [1], the tags of two flow rates in Figure 5 should be reversed. The corrected figure is shown below.

References

- [1] G. Li, Y. Wang, P. Cao, J. Zhang, and J. Mao, “Effects of the Splitter blade on the performance of a pump-turbine in pump mode,” *Mathematical Problems in Engineering*, vol. 2018, Article ID 2403179, 10 pages, 2018.



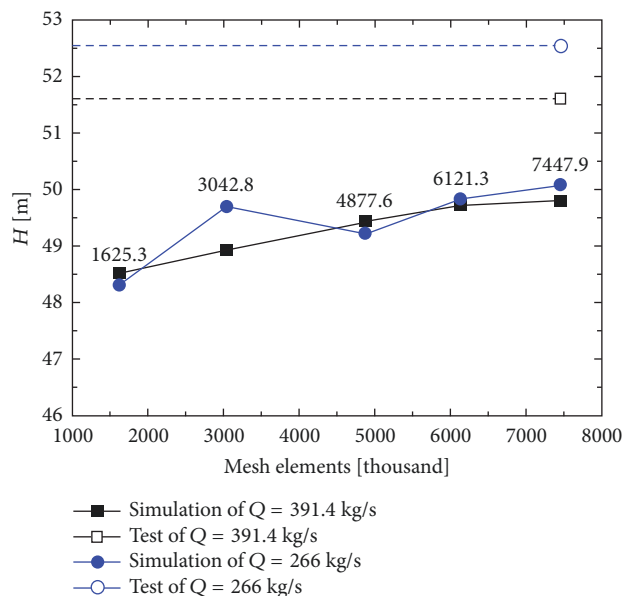


FIGURE 5: Mesh independence analysis at two flow rates.

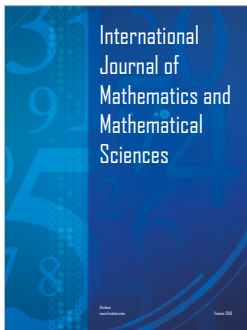

Hindawi

Submit your manuscripts at
www.hindawi.com

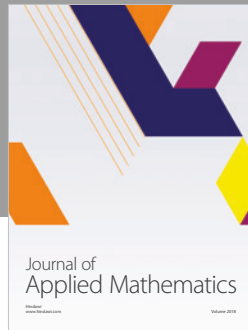