

Research Article

Low Density Solvent-Based Dispersive Liquid-Liquid Microextraction for the Determination of Synthetic Antioxidants in Beverages by High-Performance Liquid Chromatography

Hasan Çabuk and Mustafa Köktürk

Department of Chemistry, Faculty of Arts and Sciences, Bülent Ecevit University, 67100 Zonguldak, Turkey

Correspondence should be addressed to Hasan Çabuk; cabukhasan@hotmail.com

Received 25 April 2013; Accepted 5 June 2013

Academic Editors: C. Pistos, A. Sabarudin, A. Welle, and F. Zhang

Copyright © 2013 H. Çabuk and M. Köktürk. This is an open access article distributed under the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

A simple and efficient method was established for the determination of synthetic antioxidants in beverages by using dispersive liquid-liquid microextraction combined with high-performance liquid chromatography with ultraviolet detection. Butylated hydroxy toluene, butylated hydroxy anisole, and tert-butylhydroquinone were the antioxidants evaluated. Experimental parameters including extraction solvent, dispersive solvent, pH of sample solution, salt concentration, and extraction time were optimized. Under optimal conditions, the extraction recoveries ranged from 53 to 96%. Good linearity was observed by the square of correlation coefficients ranging from 0.9975 to 0.9997. The relative standard deviations ranged from 1.0 to 5.2% for all of the analytes. Limits of detection ranged from 0.85 to 2.73 ng mL⁻¹. The method was successfully applied for determination of synthetic antioxidants in undiluted beverage samples with satisfactory recoveries.

1. Introduction

Antioxidants are widely used as preservatives in food and cosmetics to prolong the shelf life by protecting them against deterioration caused by oxidation [1]. Most of the commonly used antioxidants are synthetic compounds such as butylated hydroxy toluene (BHT), butylated hydroxy anisole (BHA), tert-butylhydroquinone (TBHQ), and propyl gallate (PG) because of their chemical stability, low cost, and availability [2]. In several countries, the use of these antioxidants is regulated by various legislating authorities such as European Union Directives and Regulations, the FDA in the United States, Food Standards Australia New Zealand for Australia and New Zealand, and Joint FAO/WHO Expert Committee on Food Additives [3]. According to Turkish Food Codex, in compliance with European Union Directives, the antioxidants mentioned above are permitted for use, individually or in combination, in oils, fats, and lipid containing foods usually at concentrations up to 100–200 µg g⁻¹, while their usage in beverages has been banned [4]. Although they ultimately play an important role in protecting product

quality and safety, excess antioxidants added to food might cause a loss of nutrients and even produce toxic effects [5, 6]. Consequently, the analytical monitoring of these compounds in foods is of considerable importance.

A variety of analytical methods for determining synthetic antioxidants in food, drugs, and cosmetics have been reported to date. The methods include high-performance liquid chromatography (HPLC) [6–10], gas chromatography [1, 2, 11], and micellar electrokinetic chromatography [5, 12]. HPLC with UV detection was the most common determination technique, following an adequate sample preparation step [3]. In general, extraction techniques such as extraction with solvents [7, 13, 14] and solid phase extraction (SPE) [1, 15] are used to clean up and preconcentrate the synthetic antioxidants. However, the methods previously reported usually involve large quantities of organic solvents in liquid solvent extraction and in the elution process of SPE. Recently, dispersive liquid-liquid microextraction (DLLME) has been introduced as a novel sample preparation technique, which provides high enrichment factors together with a significant reduction of organic solvent consumption as well

as extraction time [16]. The basic principle of this method is the dispersion of extraction solvent assisted with a disperser solvent within an aqueous solution that generates a very high contact area between the aqueous phase and the extraction solvent [17]. Since its introduction, it has fast become one of the most popular analytical sample preparation techniques because of its advantages such as simplicity, rapidity, and low consumption of solvents and reagents. To date, DLLME has been applied for the analysis of various organic and inorganic pollutants in aqueous samples [18–22], and even in solid samples after an adequate pretreatment [23–25].

The aim of the present study is to assess the suitability of DLLME technique combined with HPLC-UV for the determination of three synthetic antioxidants (BHA, BHT, and TBHQ). The factors affecting the microextraction efficiency were studied in details and the optimal conditions were established. The analytical performance and possible application of the method in beverage samples were investigated. Although DLLME has been applied for the determination of BHA and BHT [9], to the best of our knowledge, this is the first reported application of DLLME for the extraction and preconcentration of TBHQ from an aqueous sample matrix.

2. Experimental

2.1. Reagents and Solutions. All of the reagents used in the experiments were of analytical grade. Butylated hydroxy toluene (BHT) was purchased from Supelco (Bellefonte, PA, USA). Butylated hydroxy anisole (BHA) and tert-butylhydroquinone (TBHQ) were obtained from Sigma-Aldrich (Steinheim, Germany). Anhydrous Na_2SO_4 and HPLC grade acetonitrile were also obtained from Sigma-Aldrich (Steinheim, Germany). Acetone, methanol, 1-octanol, and 1-decanol were purchased from Merck (Darmstadt, Germany). Water was purified with a Direct-Q3 water purification system (Millipore, Bedford, MA, USA).

The stock solutions of the antioxidants ($1000 \mu\text{g mL}^{-1}$) were prepared by dissolving each individual standard of antioxidants in acetonitrile and stored at 4°C . Working solutions were obtained by appropriate dilution of the stock standard solutions.

Tap water samples were collected from our laboratory and analyzed without any previous treatment or filtration. Several types of marketed beverage samples including mineral water, cherry juice, apple juice, and mixed fruit juice were purchased from local supermarkets. The beverage samples were filtered through a $0.45 \mu\text{m}$ filter and 5 mL portions were subjected to DLLME method without dilution before and after spiking with antioxidants at different concentrations.

2.2. Instrumentation and Chromatographic Conditions. The chromatographic analysis was performed by Thermo Finnigan HPLC system (San Jose, CA, USA) consisting of a PI1000 pump, a AS3000 automatic injector system, a SCM 1000 degasser, and a UV1000 UV detector. The system was controlled by a Spectra System Controller SN 4000 and a software package ChromQuest 4.0. Separation was performed by means of a Phenomenex Max-RP column ($250 \times 4.6 \text{ mm i.d.}$,

$4.0 \mu\text{m}$) protected by a C18 guard column ($4 \times 3 \text{ mm i.d.}$, Phenomenex). A gradient elution program was optimized by using the mobile phases of acetonitrile and distilled deionized water (0.1% trifluoroacetic acid). The separation was performed at room temperature with a constant flow rate of 1.3 mL min^{-1} by employing the elution program as follows: 0–5 min acetonitrile water 75 : 25 (v/v) and then a linear gradient elution from 75% acetonitrile at 5 min to 100% acetonitrile at 20 min, followed by isocratic elution with acetonitrile for 5 min. Finally, 10 min was necessary in reestablishing the initial conditions. To obtain better sensitivity, detection wavelength was checked experimentally with a series of injections of standard solution at 270, 280, and 290 nm wavelengths. The detector response for the studied compounds was the highest at 280 nm. Therefore, 280 nm wavelength was selected for further analysis.

2.3. Dispersive Liquid-Liquid Microextraction Procedure. 5.0 mL of standard solution (containing 500 ng mL^{-1} of each antioxidant) or real beverage sample, previously adjusted to pH 6, was transferred into a 10 mL glass test tube. Subsequently, 0.3 g NaCl was added and the tube was shaken to dissolve NaCl. 1.0 mL methanol (as disperser) containing $90 \mu\text{L}$ 1-octanol (as extraction solvent) was rapidly injected into the solution using a 1 mL syringe (Hamilton, Bonaduz, Switzerland). In this step, the extraction solvent was dispersed into the aqueous sample as very fine droplets and a cloudy solution was formed in the glass test tube. The mixture was shaken gently for a few seconds and then centrifuged for 5 min at 4000 rpm (Nuve NF 615, Ankara, Turkey). Organic solvent (1-octanol) was accumulated on the surface of aqueous phase as a small drop. After this process, a technique developed in our previous study was used for the simple and easy separation of a low density organic solvent [26]. Briefly, the organic solvent together with some little aqueous phase was pipetted by using a disposable glass Pasteur pipette. Next, the flow of the aqueous phase was stopped by successively dipping the capillary tip of the pipette into anhydrous Na_2SO_4 . The upper organic layer was then removed with a $100 \mu\text{L}$ microsyringe and $20 \mu\text{L}$ of this solution was injected into the HPLC by using an automatic injector.

2.4. Calculation of Enrichment Factor and Extraction Recovery. Equations (1) and (2) were applied for the calculation of enrichment factor (EF) and extraction recovery (ER), respectively. Consider the following:

$$\text{EF} = \frac{C_{\text{col}}}{C_o}, \quad (1)$$

where C_{col} and C_o were the concentration of analyte in the collected phase and the initial concentration of analyte in the sample solution, respectively. C_{col} was calculated from the calibration graphs of antioxidant standard solutions in

the concentration range of $0.1\text{--}200\ \mu\text{g mL}^{-1}$. Consider the following:

$$\text{ER} = \frac{(C_{\text{col}} \cdot V_{\text{col}})}{(C_o \cdot V_{\text{aq}})} \times 100 = \text{EF} \times \left(\frac{V_{\text{col}}}{V_{\text{aq}}} \right) \times 100, \quad (2)$$

where V_{col} and V_{aq} were the volume of the collected phase and the volume of the sample solution, respectively.

3. Results and Discussion

In order to obtain the maximal extraction efficiency, various parameters that affect the DLLME performance and efficiency, such as the kind and the volume of the extraction and the disperser solvents, the ionic strength, pH of the aqueous samples, and the extraction time were investigated in detail. These parameters were investigated and, then, the optimal conditions were selected. All the experiments were performed in triplicate and the concentration of antioxidants in the spiked ultrapure water samples was $500\ \text{ng mL}^{-1}$.

3.1. Selection of Extraction and Dispersive Solvent. Selection of an appropriate extraction solvent is of great importance in a DLLME process. The solvent should have good chromatographic behavior under the selected HPLC conditions, higher/lower density than water, high capability to extract the interesting analytes, and low solubility in water. 1-octanol (density, $0.82\ \text{g/mL}$) and 1-decanol (density, $0.83\ \text{g/mL}$) were tested for the extraction of selected antioxidants from aqueous sample. Figure 1 shows the effect of extraction solvent type on the extraction efficiency. The experiments were carried out by using $1\ \text{mL}$ of acetonitrile containing $50\ \mu\text{L}$ of extraction solvent. Under these experimental conditions, the volumes of the collected phase were 46 ± 1 for 1-decanol and 43 ± 2 for 1-octanol. The results indicated that the organic solvents exhibited similar extraction efficiencies for analytes, but 1-octanol has slightly higher extraction recoveries (33–71%) in comparison with 1-decanol. Therefore, 1-octanol was selected as the extraction solvent in the subsequent experiment.

In the DLLME, the miscibility of the extraction solvent with the aqueous sample is the main criterion for selecting the disperser solvent. The disperser solvent should be soluble in the extraction solvent and miscible in the water, thus, enabling the formation of fine droplets of the extraction solvent in the aqueous phase [27]. Therefore, acetonitrile, methanol, and acetone were tested as disperser solvents and the effect of these solvents on the performance of DLLME was investigated. A series of sample solutions were examined using $1\ \text{mL}$ of each of the disperser solvents containing $50\ \mu\text{L}$ of 1-octanol (Figure 1). Extraction recoveries of each antioxidant ranged between 33 and 73% for acetonitrile, 33 and 90% for methanol, and 37 and 80% for acetone. It was clear that the best extraction efficiency was obtained when methanol was used as a disperser solvent. Hence, the subsequent experiments were performed using methanol as the disperser solvent.

3.2. Effect of Volumes of Extraction and Dispersive Solvent. Optimization of volumes of the extracting solvent and the dispersing solvent is a further step in development of a DLLME procedure. Both of these volumes can influence formation of dispersion and thus have to be optimized. In order to study the effect of extraction solvent volume on the extraction efficiency, different volumes of 1-octanol ($40\text{--}100\ \mu\text{L}$ in $10\ \mu\text{L}$ intervals) and a constant volume of dispersive solvent (methanol, $1\ \text{mL}$) were tested. By increasing the volume of the extraction solvent (1-octanol) from 40 to $100\ \mu\text{L}$, the volume of the collected phase increased from 30 to $96\ \mu\text{L}$. It was observed (Figure 2) that the extraction recoveries were increased by increasing the 1-octanol volume up to $90\ \mu\text{L}$ for TBHQ, BHA, and BHT from 14, 34, and 31% to 42, 97, and 79%, respectively. Extraction recoveries were almost constant above $90\ \mu\text{L}$. The enrichment factor of the analytes decreased by increasing the volume of 1-octanol, which was an expected result due to dilution of the extracted analytes in the extraction solvent at higher volumes. Therefore, $90\ \mu\text{L}$ of 1-octanol was selected in order to obtain high recoveries and relatively high enrichment factors.

The effect of the dispersive solvent volume was tested for five volumes of methanol ($0.50, 0.75, 1.00, 1.25$, and $1.50\ \text{mL}$). The extracting solvent volume was kept constant at $90\ \mu\text{L}$. The results are presented in Figure 3. It was observed that there was no considerable change in the recovery of most antioxidants by increasing the volume of methanol from 0.50 to $1.50\ \text{mL}$. The prevailing view in the literature is that the cloudy state is not fully formed at low volumes of the dispersive solvent, whereas at higher volumes the solubility of the analytes in aqueous samples increases; therefore, the extraction efficiencies decrease [16, 19, 28]. Consequently, $1.00\ \text{mL}$ was chosen as the optimum volume of the dispersive solvent.

3.3. Effect of pH. Sample pH is another important parameter that might affect the extraction efficiency, because the analytes will be present at different forms at different pH conditions. A series of experiments were performed to investigate the effect of pH on the DLLME of antioxidants by adjusting the pH of the samples over the range of $3\text{--}10$ with $0.1\ \text{mol L}^{-1}\ \text{NaH}_2\text{PO}_4$ and drop by drop addition of $0.1\ \text{mol L}^{-1}\ \text{HCl}$ or $0.1\ \text{mol L}^{-1}\ \text{NaOH}$. It is well known that the pH of the sample solution should be lower than pK_a of the analytes for keeping analytes in their undissociated forms. TBHQ, BHA, and BHT have pK_a values higher than 10 [1]. As shown in Figure 4, the extraction recovery of TBHQ remained nearly constant over the pH range from 3.0 to 6.0 , but significantly decreased as the pH increased from 6.0 to 10.0 . For BHA and BHT, no obvious variation in extraction recoveries was observed until the pH was raised to 10 . The maximum extraction efficiency of DLLME was achieved at pH value of 6.0 , in which the analytes are completely in their molecular form. Hence, the pH of the sample solution was adjusted to 6.0 for subsequent extractions.

3.4. Effect of Ionic Strength. Generally, adding a salt decreases the solubility of analytes in the aqueous phase and enhances

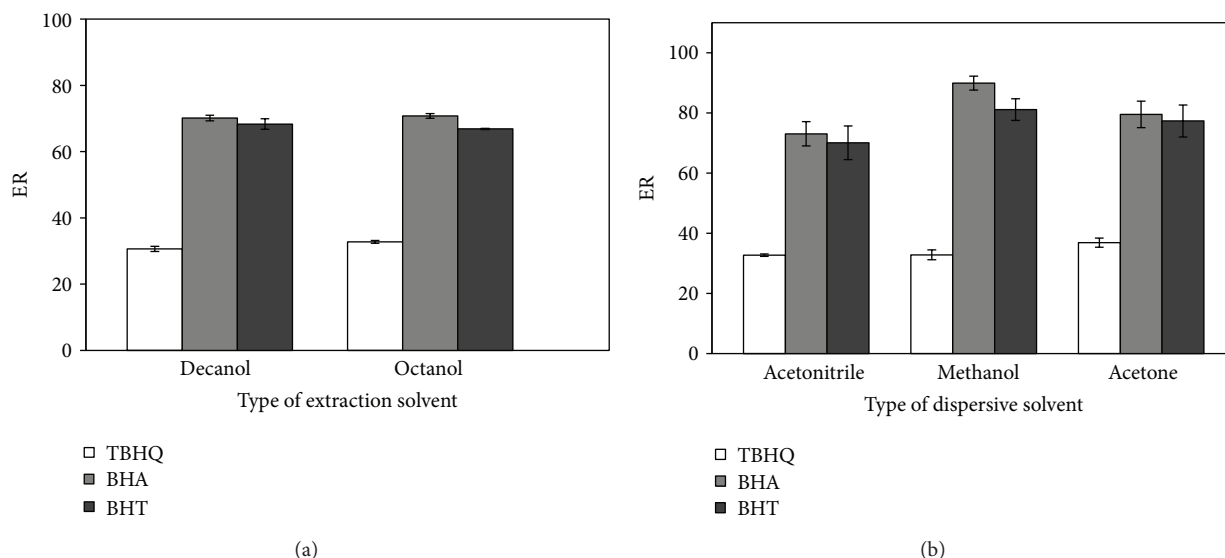


FIGURE 1: Effect of type of extraction (a) and dispersive solvent (b). Extraction solvent volume, 50 μL ; dispersive solvent volume, 1 mL; sample volume, 5 mL; spiked concentration, 500 ng mL^{-1} .

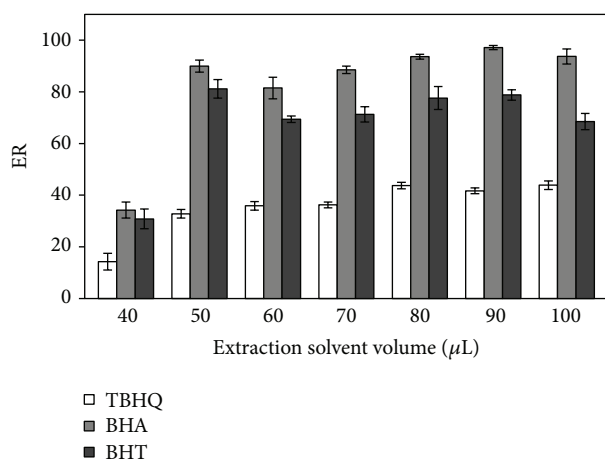


FIGURE 2: Effect of volume of extraction solvent. Dispersive solvent volume, 1 mL; sample volume, 5 mL; spiked concentration, 500 ng mL^{-1} .

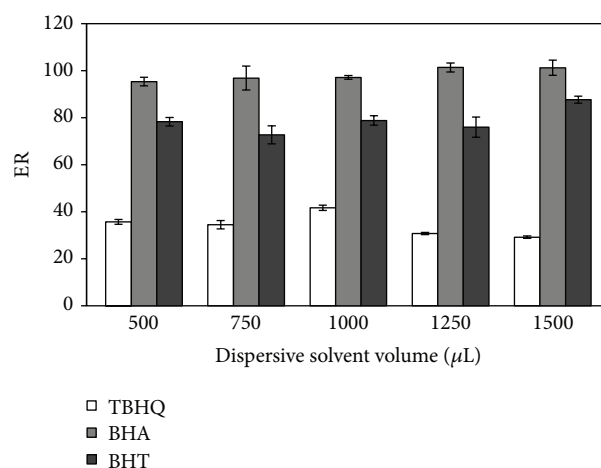


FIGURE 3: Effect of volume of dispersive solvent. Extraction solvent volume, 90 μL ; sample volume, 5 mL; spiked concentration, 500 ng mL^{-1} .

their extraction into the organic phase [29]. To assess the influence of ionic strength on extraction efficiency of DLLME, a series of experiments were performed by increasing NaCl concentration in the range of 0–10% (w/v) at an interval of 2% in the sample solution. With the increase of the content of NaCl from 0 to 6%, no significant effect on extraction efficiency was observed (Figure 5). Further increase of salt concentration up to 10% caused a gradual decrease in the extraction recovery of BHT. At 6% NaCl concentration, extraction efficiency of the analytes reached its maximum level; thus, subsequent experiments were carried out in the presence of 6% NaCl.

3.5. Effect of Extraction Time. The effects of the extraction time on DLLME of the analytes were investigated. After

the addition of the mixture of 1-octanol and methanol, the sample solution was shaken by a vortex mixer for a series of extraction times in the range of 0–10 min with constant experimental conditions. The experimental results are presented in Figure 6. The results demonstrated that the extraction time had no significant effect on extraction efficiency. It was revealed that transfer of analytes from aqueous phase to extraction solvent was very fast due to the considerably large surface area between the aqueous phase and the extraction solvent. This is the most important advantage of DLLME technique [16, 17]. Thereby, additional extraction time was not required. The mixture was shaken gently for a few seconds prior to centrifugation.

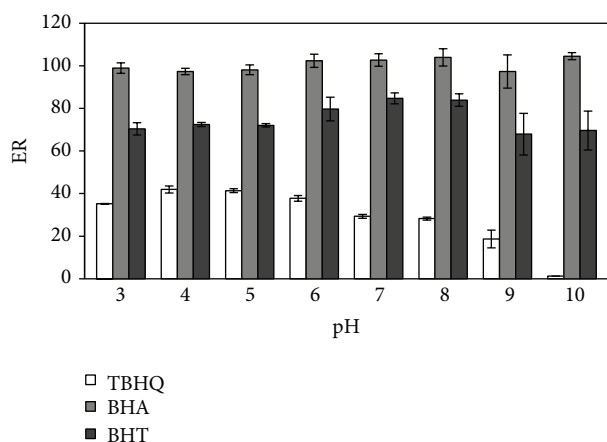


FIGURE 4: Effect of pH. Extraction solvent volume, 90 μL ; dispersive solvent volume, 1 mL; sample volume, 5 mL; spiked concentration, 500 ng mL^{-1} .

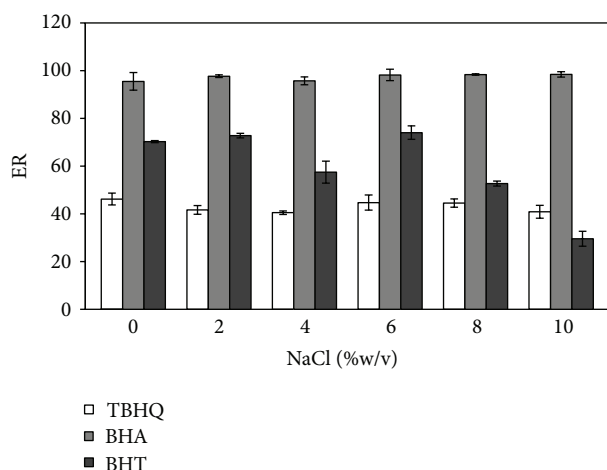


FIGURE 5: Effect of ionic strength. Extraction solvent volume, 90 μL ; dispersive solvent volume, 1 mL; pH, 6; sample volume, 5 mL; spiked concentration, 500 ng mL^{-1} .

3.6. Analytical Performance of the Proposed Method. The proposed method was evaluated under the optimized condition for the linear range, limits of detection (LOD), limits of quantification (LOQ), repeatability, enrichment factor, and extraction recovery. The results are summarized in Table 1. Linearity was observed in the ranges of 0.05–1 $\mu\text{g mL}^{-1}$ for BHT and 0.005–1 $\mu\text{g mL}^{-1}$ for TBHQ and BHA, with the square of correlation coefficients (R^2) ranging from 0.9975 to 0.9997. The limits of detection (LOD), based on a signal-to-noise ratio (S/N) of 3, ranged from 0.85 to 2.73 ng mL^{-1} . The repeatability was studied for three replicate analyses of the spiked samples at a concentration level of 0.5 $\mu\text{g mL}^{-1}$ of each antioxidant. The relative standard deviations (RSDs) were satisfactory, ranging from 1.0% to 5.2% for all compounds, showing the good repeatability of the method. The enrichment factors and extraction recoveries were ranged between 31 and 55 and 53 and 96%, respectively.

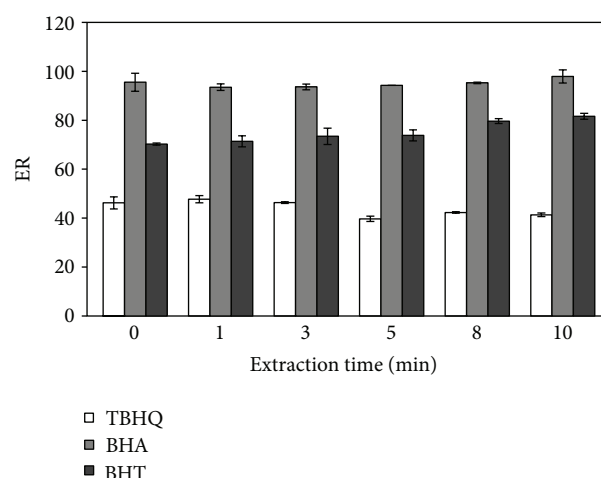


FIGURE 6: Effect of the extraction time. Extraction solvent volume, 90 μL ; dispersive solvent volume, 1 mL; pH, 6; ionic strength, 6% (NaCl, w/v); sample volume, 5 mL; spiked concentration, 500 ng mL^{-1} .

3.7. Comparison of the Proposed DLLME Method with Other Methods. The efficiency of the proposed DLLME method was compared with the previously reported methods employed for the determination of antioxidants in aqueous samples. The considered parameters were sample volume, extraction time, linear range, limits of detection, and relative standard deviation. The details of the comparison are summarized in Table 2. In respect of other methods, the proposed method has a very short extraction time due to the large surface area formed between the extraction solvent and the sample solution. The proposed method has LOD better than or comparable with those of other extraction methods. It should be noted that in some of the techniques mentioned [14, 15], large volume water samples were used which inherently increased sensitivity. The proposed method also gives better or similar performance among all the other parameters compared. By considering the results, this method proved to be a rapid, sensitive, repeatable, and easy to use technique in the determination of antioxidants in aqueous samples.

3.8. Sample Analysis. The proposed analytical method was applied to determine three synthetic antioxidants in beverage samples. Different matrices of samples were studied including tap water, mineral water, cherry juice, apple juice, and mixed fruit juice. Recovery experiments were performed at spiked concentration levels of 50 and 250 ng mL^{-1} by adding the standard solution into the undiluted beverage samples. For each sample, the extraction was repeated three times. Relative recoveries and relative standard deviations were calculated and listed in Table 3. The results indicated that the samples were free of antioxidants. As can be seen, recoveries were in the range of 78–102% for all analytes in the spiked samples indicating that the real water matrices had almost little effect on the extraction efficiency, and the method could be used for the determination of synthetic antioxidants in beverages. Figure 7 shows typical chromatograms of the mineral water

TABLE 1: Analytical performance of the proposed method for the determination of antioxidants.

Analyte	LR ^a ($\mu\text{g mL}^{-1}$)	R ^{2b}	LOD ^c (ng mL^{-1})	LOQ ^d (ng mL^{-1})	RSD ^e (%)	EF \pm SD ^f	ER% \pm SD ^g
TBHQ	0.005–1	0.9980	0.85	2.82	1.0	31 \pm 1	53 \pm 1
BHA	0.005–1	0.9997	1.67	5.56	2.2	55 \pm 2	96 \pm 3
BHT	0.05–1	0.9975	2.73	9.09	5.2	40 \pm 3	70 \pm 5

^aLinear range.^bSquare of correlation coefficient.^cLimits of detection ($S/N = 3$).^dLimits of quantification ($S/N = 10$).^eRelative standard deviation ($C = 0.5 \mu\text{g mL}^{-1}$, $n = 3$).^fMean enrichment factor \pm standard deviation ($n = 3$).^gMean extraction recovery \pm standard deviation ($n = 3$).

TABLE 2: Comparison of the proposed DLLME method with other methods used in determination of antioxidants.

Method	Sample	Volume	Analytes	Extraction time (min)	LR ($\mu\text{g L}^{-1}$)	R ²	LOD (ng mL^{-1})	RSD (%)	Ref.
SPME-GC-MS ^a	Drinking water	15 mL	BHT	30 min	12.8–64.0	0.998	4.2	7–14	[30]
SPE-GC-MS ^b	River water	5 L	BHT	—	—	—	0.001	6	[15]
O-CLLE-GC-MS ^c	Effluent samples	40 L	BHA	<23 min	0.025–1	0.994	0.01	19.7	[14]
			BHT		0.0125–0.5	0.993	0.008	34.3	
SPE-GC-MS	Aqueous samples	200 mL	TBHQ	—	2–2000	0.996	0.03	2	[1]
			BHA		2–2000	0.994	0.8	3	
			BHT		2–2000	0.997	0.2	4	
DLLME-HPLC-UV ^d	Fruit juice	40 mL	BHA	10 min	10–2500	0.9993	2.5	2.7	[9]
			BHT		2–2500	0.9989	0.9	4.2	
DLLME-HPLC-UV	Beverages	5 mL	TBHQ	<1 min	5–1000	0.9980	0.85	1.0	This study
			BHA		5–1000	0.9997	1.67	2.2	
			BHT		50–1000	0.9975	2.73	5.2	

^aSolid-phase microextraction-gas chromatography-mass spectrometry.^bSolid-phase extraction-gas chromatography-mass spectrometry.^cOnline continuous liquid-liquid extraction-gas chromatography-mass spectrometry.^dDispersive liquid-liquid microextraction high-performance liquid chromatography-ultraviolet detection.

TABLE 3: Spiked recoveries of antioxidants in beverage samples by the proposed method.

Sample	Added (ng/mL)	TBHQ		BHA		BHT	
		Found \pm SD (ng/mL)	RR (%)	Found \pm SD (ng/mL)	RR (%)	Found \pm SD (ng/mL)	RR (%)
Tap water	50	47.3 \pm 2.2	95	47.8 \pm 1.3	96	44.3 \pm 4.6	89
	250	237.7 \pm 9.8	95	244.1 \pm 8.3	98	245.8 \pm 4.8	99
Mineral water	50	50.9 \pm 1.2	102	50.1 \pm 2.5	100	49.2 \pm 1.3	98
	250	240.8 \pm 2.7	96	241.4 \pm 6.0	97	247.1 \pm 12.3	99
Cherry juice	50	47.7 \pm 3.0	95	39.9 \pm 2.9	80	43.4 \pm 2.4	87
	250	254.5 \pm 8.9	102	241.6 \pm 6.8	97	240.9 \pm 6.7	96
Apple juice	50	44.2 \pm 2.4	88	46.2 \pm 1.5	92	46.8 \pm 2.9	94
	250	213.4 \pm 10.2	85	233.8 \pm 11.6	94	241.7 \pm 8.1	97
Mixed fruit juice	50	39.1 \pm 2.5	78	46.1 \pm 1.1	92	43.8 \pm 2.6	88
	250	205.6 \pm 8.8	82	240.3 \pm 6.9	96	244.4 \pm 7.7	98

RR: relative recovery.

SD: standard deviation ($n = 3$).

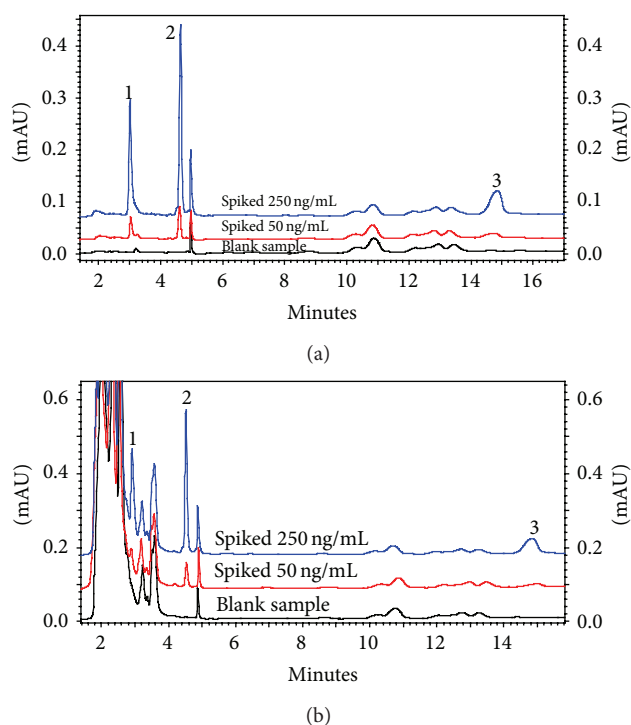


FIGURE 7: HPLC-UV chromatograms of antioxidants at the concentration levels of 50 and 250 ng mL⁻¹ in mineral water (a) and cherry juice sample (b) before and after spiking. Extraction solvent volume (1-octanol), 90 μ L; dispersive solvent volume (methanol), 1 mL; pH, 6; ionic strength, 6% (NaCl, w/v); sample volume, 5 mL. Peak assignment: (1) TBHQ, (2) BHA, (3) BHT.

and cherry juice samples spiked at the concentration levels of 50 and 250 ng mL⁻¹ after DLLME.

4. Conclusions

In the present study, a DLLME technique combined with HPLC-UV has been proposed for the rapid and sensitive determination of three synthetic antioxidants (TBHQ, BHA, and BHT) in beverage samples. The proposed method yielded acceptable relative recoveries (78–102%) and good repeatabilities (1.0–5.2%). Moreover, high sensitivity with LODs between 0.85 and 2.73 ng mL⁻¹ was achieved by using a sample volume of only 5.0 mL. Based on these advances, the proposed method could be used for monitoring as well as controlling the synthetic antioxidants in aqueous food samples.

Acknowledgment

The author wishes to thank the Bülent Ecevit University (2012-10-03-08) for the opportunity and support to carry out this research.

References

- [1] R. Rodil, J. B. Quintana, G. Basaglia, M. C. Pietrogrande, and R. Cela, "Determination of synthetic phenolic antioxidants and their metabolites in water samples by downscaled solid-phase extraction, silylation and gas chromatography-mass spectrometry," *Journal of Chromatography A*, vol. 1217, no. 41, pp. 6428–6435, 2010.
- [2] M.-H. Yang, H.-J. Lin, and Y.-M. Choong, "A rapid gas chromatographic method for direct determination of BHA, BHT and TBHQ in edible oils and fats," *Food Research International*, vol. 35, no. 7, pp. 627–633, 2002.
- [3] C. André, I. Castanheira, J. M. Cruz, P. Paseiro, and A. Sanches-Silva, "Analytical strategies to evaluate antioxidants in food: a review," *Trends in Food Science and Technology*, vol. 21, no. 5, pp. 229–246, 2010.
- [4] Turkish Food Codex, "Ministry of Food Agriculture and Livestock," Republic of Turkey, Publication No: 2011/ 28157, 2011.
- [5] Y. Guan, Q. Chu, L. Fu, T. Wu, and J. Ye, "Determination of phenolic antioxidants by micellar electrokinetic capillary chromatography with electrochemical detection," *Food Chemistry*, vol. 94, no. 1, pp. 157–162, 2006.
- [6] B. Saad, Y. Y. Sing, M. A. Nawi et al., "Determination of synthetic phenolic antioxidants in food items using reversed-phase HPLC," *Food Chemistry*, vol. 105, no. 1, pp. 389–394, 2007.
- [7] C. Perrin and L. Meyer, "Quantification of synthetic phenolic antioxidants in dry foods by reversed-phase HPLC with photodiode array detection," *Food Chemistry*, vol. 77, no. 1, pp. 93–100, 2002.
- [8] D. Pattono, L. M. Battaglini, A. Barberio et al., "Presence of synthetic antioxidants in organic and conventional milk," *Food Chemistry*, vol. 115, no. 1, pp. 285–289, 2009.
- [9] P. Biparva, M. Ehsani, and M. R. Hadjmohammadi, "Dispersive liquid-liquid microextraction using extraction solvents lighter than water combined with high performance liquid chromatography for determination of synthetic antioxidants in fruit juice samples," *Journal of Food Composition and Analysis*, vol. 27, pp. 87–94, 2012.
- [10] J. Y. Wang, H. L. Wu, Y. Chen et al., "Fast analysis of synthetic antioxidants in edible vegetable oil using trilinear component modeling of liquid chromatography-diode array detection data," *Journal of Chromatography A*, vol. 1264, pp. 63–71, 2012.
- [11] M. Ding and J. Zou, "Rapid micropreparation procedure for the gas chromatographic-mass spectrometric determination of BHT, BHA and TBHQ in edible oils," *Food Chemistry*, vol. 131, no. 3, pp. 1051–1055, 2012.
- [12] M. M. Delgado-Zamarreño, I. González-Maza, A. Sánchez-Pérez, and R. Carabias Martínez, "Analysis of synthetic phenolic antioxidants in edible oils by micellar electrokinetic capillary chromatography," *Food Chemistry*, vol. 100, no. 4, pp. 1722–1727, 2007.
- [13] O. Pinho, I. M. P. L. V. O. Ferreira, M. B. P. P. Oliveira, and M. A. Ferreira, "Quantification of synthetic phenolic antioxidants in liver pates," *Food Chemistry*, vol. 68, no. 3, pp. 353–357, 2000.
- [14] M. A. Soliman, J. A. Pedersen, and I. H. Suffet, "Rapid gas chromatography-mass spectrometry screening method for human pharmaceuticals, hormones, antioxidants and plasticizers in water," *Journal of Chromatography A*, vol. 1029, no. 1-2, pp. 223–237, 2004.
- [15] E. Fries and W. Püttmann, "Analysis of the antioxidant butylated hydroxytoluene (BHT) in water by means of solid phase

- extraction combined with GC/MS," *Water Research*, vol. 36, no. 9, pp. 2319–2327, 2002.
- [16] M. Rezaee, Y. Assadi, M.-R. Milani Hosseini, E. Aghaee, F. Ahmadi, and S. Berijani, "Determination of organic compounds in water using dispersive liquid-liquid microextraction," *Journal of Chromatography A*, vol. 1116, no. 1-2, pp. 1–9, 2006.
 - [17] S. S. Caldas, F. P. Costa, and E. G. Primel, "Validation of method for determination of different classes of pesticides in aqueous samples by dispersive liquid-liquid microextraction with liquid chromatography-tandem mass spectrometric detection," *Analytica Chimica Acta*, vol. 665, no. 1, pp. 55–62, 2010.
 - [18] M. B. Melwanki and M.-R. Fuh, "Partitioned dispersive liquid-liquid microextraction. An approach for polar organic compounds extraction from aqueous samples," *Journal of Chromatography A*, vol. 1207, no. 1-2, pp. 24–28, 2008.
 - [19] M. A. Farajzadeh, M. Bahram, and M. R. Vardast, "Optimization of dispersive liquid-liquid microextraction of Co(II) and Fe(III) as their oxinate chelates and analysis by HPLC: application for the simultaneous determination of Co(II) and Fe(III) in water samples," *Journal of Separation Science*, vol. 32, no. 23-24, pp. 4200–4212, 2009.
 - [20] H. R. Sobhi, A. Kashtiaray, H. Farahani, and M. R. Farahani, "Quantitation of antioxidants in water samples using ionic liquid dispersive liquid-liquid microextraction followed by high-performance liquid chromatography-ultraviolet detection," *Journal of Separation Science*, vol. 34, no. 1, pp. 77–82, 2011.
 - [21] D. Han, H. Yan, and K. H. Row, "Ionic liquid-based dispersive liquid-liquid microextraction for sensitive determination of aromatic amines in environmental water," *Journal of Separation Science*, vol. 34, no. 10, pp. 1184–1189, 2011.
 - [22] T. A. Kokya, K. Farhadi, and A. A. Kalhori, "Optimized dispersive liquid-liquid microextraction and determination of sorbic acid and benzoic acid in beverage samples by gas chromatography," *Food Analytical Methods*, vol. 5, no. 3, pp. 351–358, 2012.
 - [23] M. Asensio-Ramos, J. Hernández-Borges, T. M. Borges-Miquel, and M. Á. Rodríguez-Delgado, "Ionic liquid-dispersive liquid-liquid microextraction for the simultaneous determination of pesticides and metabolites in soils using high-performance liquid chromatography and fluorescence detection," *Journal of Chromatography A*, vol. 1218, no. 30, pp. 4808–4816, 2011.
 - [24] X. Lin, X. Chen, X. Huo, Z. Yu, K. Bi, and Q. Li, "Dispersive liquid-liquid microextraction coupled with high-performance liquid chromatography-diode array detection for the determination of N-methyl carbamate pesticides in vegetables," *Journal of Separation Science*, vol. 34, no. 2, pp. 202–209, 2011.
 - [25] H. Wang, H. Yan, and J. Qiao, "Miniaturized matrix solid-phase dispersion combined with ultrasound-assisted dispersive liquid-liquid microextraction for the determination of three pyrethroids in soil," *Journal of Separation Science*, vol. 35, no. 2, pp. 292–298, 2012.
 - [26] H. Çabuk, M. Akyüz, and Ş. Ata, "A simple solvent collection technique for a dispersive liquid-liquid microextraction of parabens from aqueous samples using low-density organic solvent," *Journal of Separation Science*, vol. 35, pp. 2645–2652, 2012.
 - [27] A. V. Herrera-Herrera, M. Asensio-Ramos, J. Hernández-Borges, and M. Á. Rodríguez-Delgado, "Dispersive liquid-liquid microextraction for determination of organic analytes," *Trends in Analytical Chemistry*, vol. 29, no. 7, pp. 728–751, 2010.
 - [28] T.-Y. Chou, S.-L. Lin, and M.-R. Fuh, "Determination of phenylurea herbicides in aqueous samples using partitioned dispersive liquid-liquid microextraction," *Talanta*, vol. 80, no. 2, pp. 493–498, 2009.
 - [29] M. A. Farajzadeh, D. Djozan, and P. Khorram, "Development of a new dispersive liquid-liquid microextraction method in a narrow-bore tube for preconcentration of triazole pesticides from aqueous samples," *Analytica Chimica Acta*, vol. 713, pp. 70–78, 2012.
 - [30] N. B. Tombesi and H. Freije, "Application of solid-phase microextraction combined with gas chromatography-mass spectrometry to the determination of butylated hydroxytoluene in bottled drinking water," *Journal of Chromatography A*, vol. 963, no. 1-2, pp. 179–183, 2002.

