

Review Article

Green Communication for Next-Generation Wireless Systems: Optimization Strategies, Challenges, Solutions, and Future Aspects

Rajkumar Singh Rathore,¹ Suman Sangwan,¹ Omprakash Kaiwartya ,² and Geetika Aggarwal²

¹*Department of Computer Science and Engineering, Deenbandhu Chhotu Ram University of Science and Technology, Murthal, Sonapat, Haryana 131039, India*

²*School of Science and Technology, Nottingham Trent University, Nottingham NG11 8NS, UK*

Correspondence should be addressed to Omprakash Kaiwartya; omprakash.kaiwartya@ntu.ac.uk

Received 2 February 2021; Revised 9 April 2021; Accepted 3 May 2021; Published 25 May 2021

Academic Editor: Juan C. Cano

Copyright © 2021 Rajkumar Singh Rathore et al. This is an open access article distributed under the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Wireless sensor networks (WSNs) have emerged as a backbone technology for the wireless communication era. The demand for WSN is rapidly increasing due to their major role in various applications with a wider deployment and omnipresent nature. The WSN is rapidly integrated into a large number of applications such as industrial, security, monitoring, tracking, and applications in home automation. The widespread use in many different areas attracts research interest in WSNs. Therefore, researchers are taking initiatives in exploring innovation day by day particularly towards the Internet of Things (IoT). But, WSN is having lots of challenging issues that need to be addressed, and the inherent characteristics of WSN severely affect the performance. Energy constraints are one of the primary issues that require urgent attention from the research community. Optimal energy optimization strategies are needed to counter the issue of energy constraints. Although one of the most appropriate schemes for handling energy constraints issues is the appropriate energy harvesting technique, the optimal energy optimization strategies should be coupled together for effectively utilizing the harvested energy. In this high-level systematic and taxonomical survey, we have organized the energy optimization strategies for EH-WSNs into eleven factors, namely, radio optimization schemes, optimizing the energy harvesting process, data reduction schemes, schemes based on cross-layer optimization, schemes based on cross-layer optimization, sleep/wake-up policies, schemes based on load balancing, schemes based on optimization of power requirement, optimization of communication mechanism, schemes based on optimization of battery operations, mobility-based schemes, and finally energy balancing schemes. We have also prepared the summarized view of various protocols/algorithms with their remarkable details. This systematic and taxonomy survey also provides a progressive detailed overview and classification of various optimization challenges for the EH-WSNs that require attention from the researcher followed by a survey of corresponding solutions for corresponding optimization issues. Further, this systematic and taxonomical survey also provides a deep analysis of various emerging energy harvesting technologies in the last twenty years of the era.

1. Introduction

The current era is the witness of many emerging technological advancements including the Internet of Things (IoT), cloud computing along with wireless sensor networks, and further integration of these emerging technologies for collecting and deep analysis of monitored information [1–3].

Also, this analyzed factual information is needed for enhancing the efficiency of the particular industrial system by ensuring optimal resource consumption. Moreover, for monitoring various events pertaining to home/office, human activities, health, defense, agriculture, and industries, etc., wireless sensor networks are utilized extensively [4, 5]. In extreme circumstances, sensor nodes are remotely deployed

in harsh environmental conditions with the limited capacity of the battery for particular monitoring applications in which long operational periods are needed even years or decades and battery power depletes regularly with the course of time, and in these undesirable situations, it is impossible to provide battery replacement facility or recharging activity; therefore, energy efficiency is considered a major challenging issue for sensor nodes [6, 7].

To amicably handle the energy scarcity issue of sensor nodes, there is a need for an alternative energy source to compensate for the energy requirement in case of battery drain out [8, 9]. One of the best resolutions to this issue is the use of an energy harvesting technique in which energy from natural sources available in the environment is transformed into power to resuscitate the batteries [10, 11]. The new advancements in energy harvesting techniques for WSNs have become a prominent research field. But, in the case of energy harvesting, the energy output may be insufficient due to streaky and spatial variations, and some mechanisms are needed for effective utilization of the harvested energy; further, these mechanisms are collectively termed as energy optimization strategies [12, 13].

The energy harvesting wireless sensor networks (EH-WSNs) are having a large number of challenging issues based on their inherent characteristics, and these issues have a direct impact on the performance [14]. In this article, we will discuss the various challenging issues and corresponding suggested solutions in the subsequent sections, although our main focus is on energy efficiency. It is a noteworthy fact that although a large number of research have been completed and others are still going on with a proposal for enhancing energy efficiency, energy optimization has become an evergreen research challenge for EH-WSNs [15]. For EH-WSNs, there is a need for some planned mechanism known as energy optimization strategies for optimum energy consumption in a sensor node by managing energy efficiently. There exist a large number of literature focusing on energy management schemes in the last two decades; the reason is obvious; for optimal performance of WSN, there is a need for energy optimization. The ultimate aim of energy optimization strategies is to manage the energy in the network for increasing the lifetime of tiny sensor nodes, and the network remains operational perennially. Special attention is needed for managing the energy optimization issue for sensor nodes [16].

This systematic and taxonomical survey focused on discussing the energy optimization strategies for EH-WSNs. There are certain specific reasons behind this. The energy optimization strategies in EH-WSN help in achieving the desired balance between processing and transmission of data. By effectively utilizing the optimization strategies, the optimum performance can be achieved in EH-WSNs with the existence of prevailing various limitations. The term optimization in mathematical form can be defined as discovering the minimum or maximum for a particular defined function based on multiple constraints. For an optimization problem, a feasible solution is developed with the help of multiple values that satisfies all the prevailing constraints. The ultimate aim of a well-defined optimization technique is to care-

fully observe the feasible solutions and then proposing the optimum solution. Considering the EH-WSNs scenario with multisource energy harvesters, the design of power management circuits can be optimized for enhancing the overall efficiency. One of the most appropriate schemes for handling energy constraints issues of WSNs is the energy harvesting technique, and the proper optimization of EH technologies and devices is needed; further, the optimal energy optimization strategies should be coupled together for effectively utilizing the harvested energy.

1.1. A Distinctive Approach and Motivation. In this article, we have done an extensive study for classifying the energy optimization strategies for EH-WSNs; the uniqueness in this research that distinguishes this work from others is the in-depth classification of energy optimization strategies for EH-WSNs by covering all possible aspects. Also, in this article, different energy optimization strategies have been discussed consisting of various algorithms along with further details of improvements in the coming future.

Although, there exist a large number of literature on energy management issue that mostly focus on a particular area and discuss energy management by considering only particular perspective and they do not concentrate on other areas affecting energy utilization in EH-WSNs, and we have tried our best to overcome this drawback of existing pieces of literature and try to cover as many as possible all perspectives in this article. We hope that the energy optimization strategies discussed in this article with a wide view definitely help the researchers working on this area to understand the key pillars of the energy optimization framework. Further, this article also provides space to explore new possibilities for energy efficiency in the field of EH-WSNs.

1.2. Salient Contributions towards Findings. In this systematic review article, we have conducted a detailed study of energy optimization issues in EH-WSNs. The detailed study helps in finding the facts (research gaps) in the existing review papers and guides the authors to write a systematic review article covering all aspects related to energy optimization for EH-WSNs.

The major contribution of this systematic review article can be pointed out as follows:

- (1) This systematic review article explains the energy optimization strategies for EH-WSNs by considering eleven factors, namely, radio optimization schemes, optimizing the energy harvesting process, data reduction schemes, schemes based on cross-layer optimization, sleep/wake-up policies, schemes based on load balancing, schemes based on optimization of power requirement, optimization of communication mechanism, schemes based on optimization of battery operations, mobility-based schemes, and finally energy balancing schemes. The ultimate aim is to discuss the energy optimization schemes for EH-WSNs with a diversified view covering all possible areas having the sharp vision that affected the energy consumption in the network

- (2) Furthermore, this systematic review article provides the pointwise precise overview of various key pieces of literature in the last twenty years covering especially duty cycle schemes, MAC protocols, opportunistic routing schemes considering geographic characteristics, cluster-based routing, and also energy balancing schemes with key attributes
- (3) Next, this systematic review article provides complete coverage of challenging issues for formulating the optimization problems for EH-WSNs and also describes the solutions to optimization problems in the form of popular algorithms
- (4) Further, this systematic review article provides the paradigm shift for energy harvesting technologies considering the twenty years of an era starting from the year 2000 to 2020 and also describing the next-generation technologies and future of energy harvesting techniques

We have structured this systematic review article as per the following: Section 1 comprises the brief introduction of WSNs, the need and role of energy harvesting techniques, and WSNs with energy harvesting techniques (EH-WSNs), and in the last, this section describes the need of energy optimization strategies for EH-WSNs. Section 2 provides a deep insight into the adopted research methodology. In Section 3, this article provides details about the energy harvesting techniques with corresponding sources of energy. In Section 4, this article provides the classification of energy optimization strategies with a broad view by covering multiple factors; also, the precise tabular representations of duty cycle schemes with key attributes, MAC protocols, opportunistic routing schemes considering geographic characteristics, key features of clustering approaches, and also energy balancing schemes are illustrated. The optimization problems with the respective solutions for EH-WSNs are provided in Section 5. Also, a paradigm shift for energy harvesting technologies along with the future of energy harvesting techniques for WSNs and further research directions is provided in Section 6. In Section 7, this review article provides a conclusion.

2. A Deep Insight into the Adopted Research Methodology

This systematic review article focuses on the energy optimization strategies for EH-WSNs with a broad view by covering all possible factors that affected the energy efficiency in EH-WSNs.

There exist a large number of literature with a focus on performance enhancement for EH-WSNs; further, it should be noted that researchers have already put lots of efforts towards proposing various strategies for EH-WSNs for enhancing the performance by covering the energy scarcity issue. We would like to highlight a few pieces of literature as [17–20]. We have tried our best level to select the appropriate literature for conducting the detailed study for collecting facts and thereby designing this systematic review article.

We have selected the era starting from 2000 to 2020 for selecting the appropriate good literature with good citations. Articles published in different journals/conferences have been studied for collecting the facts about energy optimization. Figure 1 illustrates the number of literature considered yearwise.

We have adopted a structured research methodology consisting of six major steps as depicted in Figure 2. In this systematic review article, we have structured the research into six major steps:

In step 1, we select the potential research questions, and further, we understand the need of exploring the research questions; next, we define the research objectives corresponding to potential research questions. Further, in step 2, we prepare the new database consisting of high-quality research papers from three already existing databases, namely, Web of Science, SCI/SCIE, and Scopus databases, and next, we conduct an extensive research study which leads to further retrieval of data for formulating systematic research design. Furthermore, in step 3, we prepare the summarized solutions corresponding to research questions with the help of an analyzed literature review. Next, in step 4, we perform the quality assessment activities for verifying the facts and figures which we have collected from the newly constructed database. This step is very important because this systematic review article will provide significant information to researchers working on the energy optimization issues of EH-WSNs. Moreover, in step 5, we prepare the summary of outcomes after analyzing the literature in the newly constructed database. Besides, in step 6, we mark the corresponding references.

The newly constructed database consists of various literature, and we have considered three major parameters while considering the particular literature for this systematic review and three parameters are the articles that should focus on our primary objective, i.e., energy efficiency, the journal in which literature has been published that should be peer-reviewed, and next, the selected literature that should have appropriate citations.

Initially, we have selected 610 pieces of literature. After the analysis we have further selected 305 pieces of literature out of the database of 610 pieces of literature. Again, we perform further analysis and select 178 pieces of literature out of 305 pieces of literature previously selected.

3. Energy Harvesting Techniques with Corresponding Sources of Energy

The major issue that has a severe impact on the performance of WSNs is the evergreen energy scarcity issue that needs to be handled with a focused approach. Traditionally, sensor nodes are operating with limited capacity batteries and batteries are having their limitations such as leakages of current, breakdown issues, and limited energy density issues. Also, the sensor nodes energy profile is regularly depleted with the time; thereby, sensor node is not able to provide the assigned duties especially in longer duration, but there exist many applications which require a much higher lifespan of sensor nodes ranging from months to several years, so in

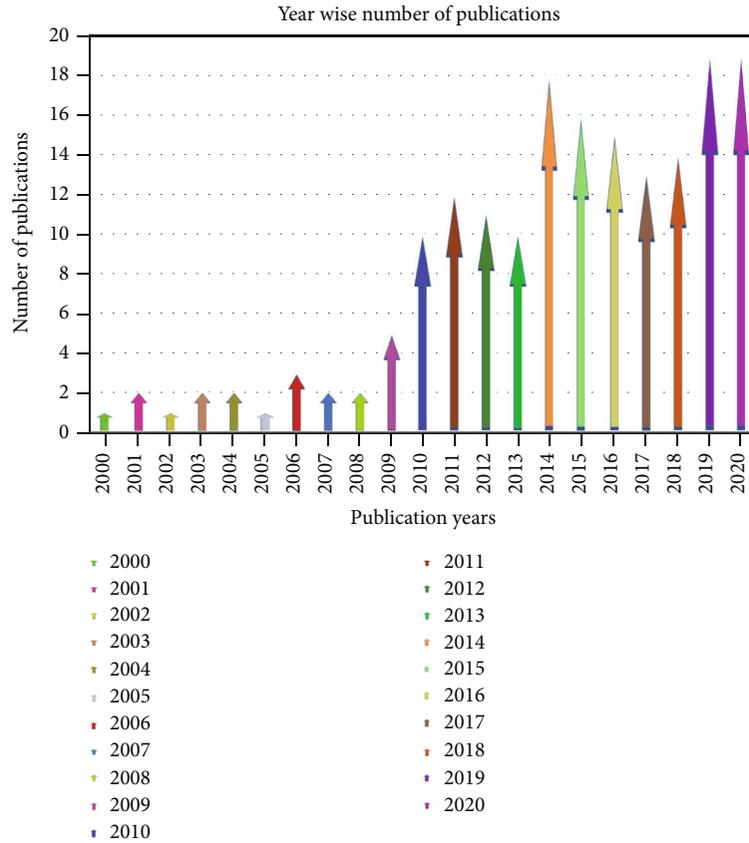


FIGURE 1: Yearwise number of literature considered for maintaining the database.

these emergencies, there exist only two usual solutions in terms of replacing the batteries or harvesting the energy to fill the gap that arises due to depleted energy. Also, battery replacement is sometimes not possible especially in cases of difficult remote deployment. So, the most general solution for enhancing the life of sensor nodes is by providing a regular power supply and further this is possible by utilizing the energy harvesting mechanism and this scheme enables the sensor nodes to work continuously without interruption, since, in most cases, sensor nodes need a continuous power supply. Further, Figure 3 describes the different types of energy harvesting mechanisms with different energy types available for harvesting and Table 1 illustrates the power density of various energy harvesting schemes.

Next, we are trying to illustrate the brief description with relevant references as per the following.

Mechanical energy harvesting [21, 22] is defined as the method in which energy conversion from mechanical to electrical occurs. The harvester consists of the spring-mounted mass component installed inside, and the mechanical energy from displacements and oscillations is converted into electrical energy. This entire process utilized mechanical stress, vibrations, rotational movements of waste, fluid, force, and high-pressure motors. There exist three forms of mechanical energy harvesting, namely, electromagnetic, electrostatic, and piezoelectric. In the piezoelectric energy harvesting method [23, 24], the two factors play a major role such as the use of piezoelectric material and the piezoelectric effect.

Here, the piezoelectric material is strained, and further, energy from vibrations, pressure, and force is converted to electrical energy. The electrostatic energy harvesting mechanism [25] utilized the principle in which energy conversion occurs from mechanical to electrical with the capacitance change. Here, the key factor is changing the capacitance of a varying capacitor which is depending on the vibrations. Next, the popular law of electromagnetic induction which is known as Faraday's law is used in the electromagnetic energy harvesting mechanism [26, 27]. Here, the electromagnetic harvester utilizes the inductive spring-mass system which is the backbone of this type of harvesting system. The stationary magnet creates the magnetic field, and further, movement of magnetic material via the magnetic field induces the voltage. Now, energy conversion takes place from mechanical energy to electrical energy.

Photovoltaic energy harvesting is defined as the method in which conversion of photons to electrical energy occurs, and here, photons are coming from sources such as artificial or solar light. In this harvesting mechanism, photovoltaic cells are exploited. Here, at the P-N junction, an electrical field is formed [28]. The solar energy harvesting mechanism is illustrated in Figure 4.

Thermal energy harvesting [29] can be implemented in two ways as pyroelectric and thermoelectric energy harvesting. Further, thermoelectric energy harvesting consists of power generators that are used for electrical energy generation based on the Seebeck effect and known as thermoelectric

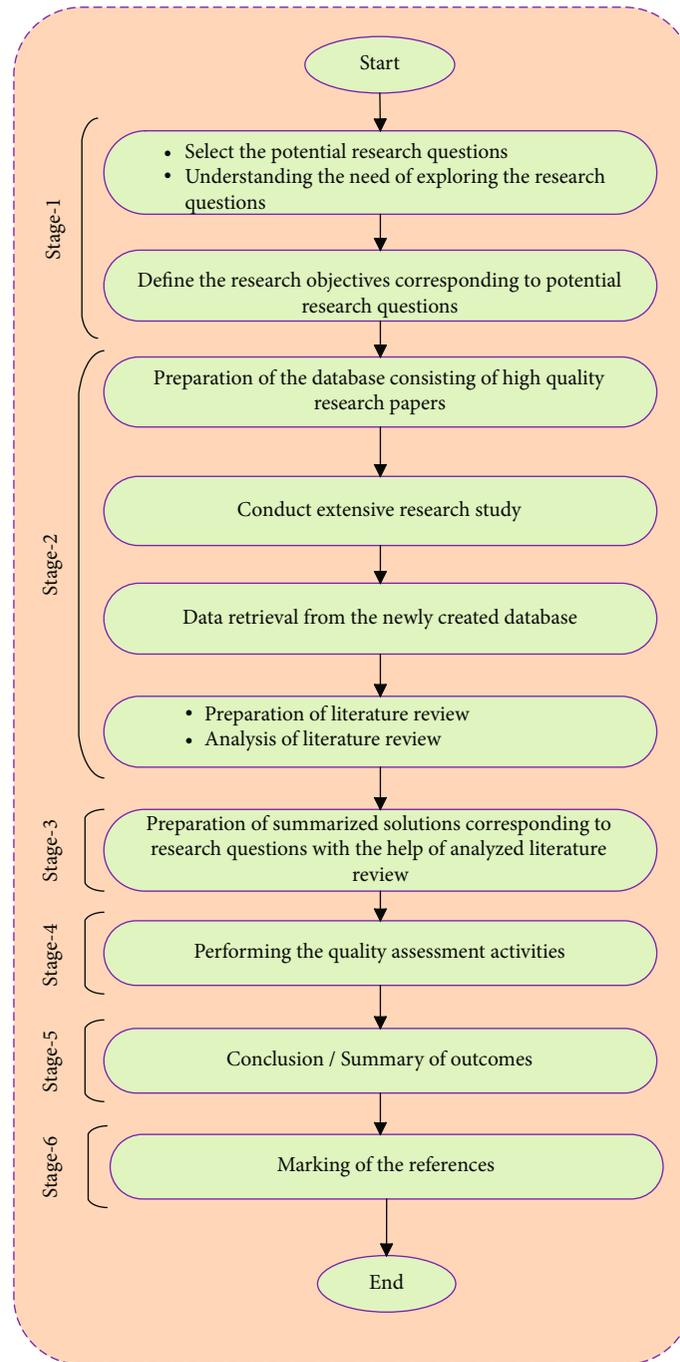


FIGURE 2: Structured research methodology with six major steps.

power generators. The thermopile is the main element of a thermoelectric power generator. Further, two dissimilar conductors' arrays are used in the formation of the thermopile [30]. Pyroelectric energy harvesting is defined as the method in which voltage is generated by cooling or heating the pyroelectric materials. The basic core element of pyroelectric energy harvesting is the pyroelectric material's crystal structure, and due to change in temperature, atom location in crystal structure changes and which further results in producing the voltage. Pyroelectric materials require time-varying changes in the temperature as compared with ther-

moelectric energy harvesting in which temperature gradient is needed [31].

Wireless energy harvesting exists in two major forms such as resonant and RF energy harvesting. Further, RF energy harvesting consists of a rectifying antenna or rectenna which is used for converting electromagnetic waves into electrical energy. In the RF energy harvesting mechanism, there are two sources from which energy can be harvested either through RF power or through electromagnetic signals with a specific wavelength. Further, sources, namely, microwaves, cell phones, broadcasting of television and radio, and Wi-Fi,

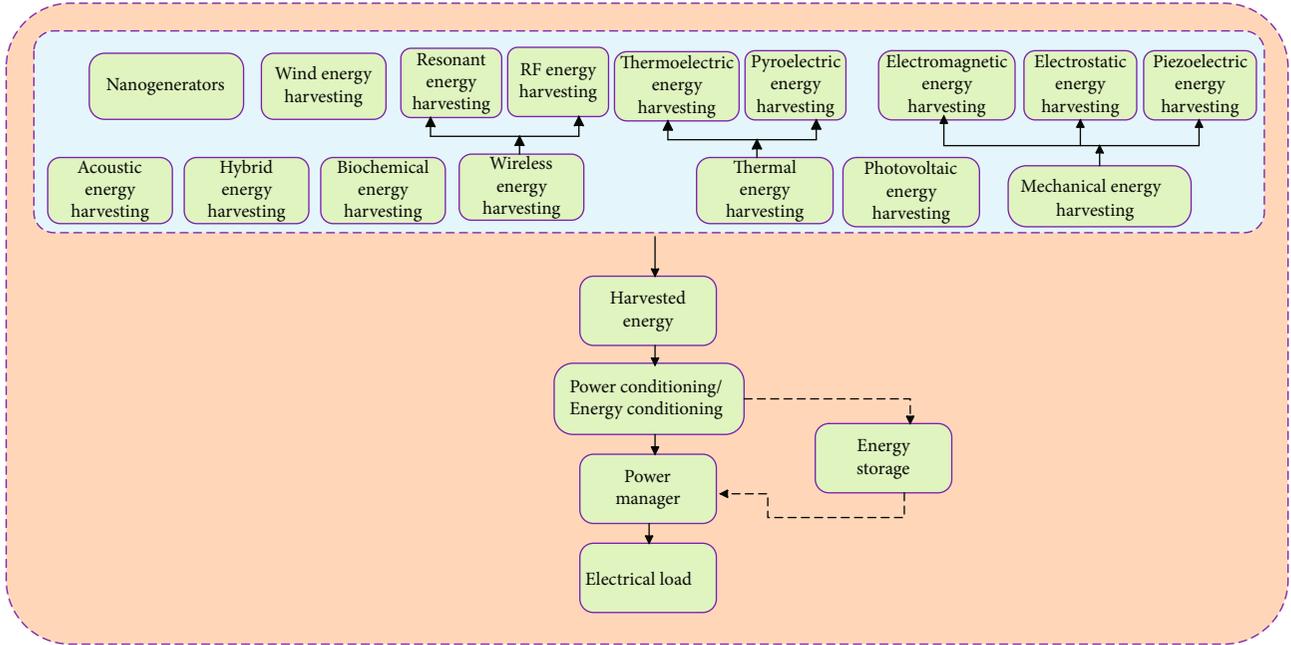


FIGURE 3: Energy harvesting techniques with corresponding sources of energy.

TABLE 1: Power density of various energy harvesting schemes [14].

Source of energy	Classification	Energy harvesting methodology	Power density
Mechanical energy	Motion	Electromechanical	$330 \mu\text{W}/\text{cm}^3$
	Acoustic noise	Piezoelectric	$960 \text{nW}/\text{cm}^3$
	Hydro & flow of wind		$16.2 \mu\text{W}/\text{cm}^3$
Thermal energy	Heat from body	Thermoelectric	$40 \mu\text{W}/\text{cm}^2$
Energy from radiation	Solar energy	Solar cells	(Indoor) $<10 \mu\text{W}/\text{cm}^2$ (Outdoor) $15 \mu\text{W}/\text{cm}^2$
	RF	Electromagnetic conversion	(GSM) $0.1 \mu\text{W}/\text{cm}^2$ (Wi-Fi) $0.01 \mu\text{W}/\text{cm}^2$

are considered as ambient RF power. Resonant energy harvesting or resonant inductive coupling can be defined as the method of transmitting and accumulating electrical energy specifically between the two coils. There exist two coils named primary and secondary coil; further, an inductive transformer is attached to a primary coil. At the same frequency, these two coils are resonant. Next, through the air, power is sent to a specified device that is attached to a secondary coil. The magnetic flux is produced by the primary coil which is time-varying in nature, and further, voltage is induced whenever that magnetic flux crosses the secondary coil [32]. RF energy harvesting is depicted in Figure 5.

Wind energy harvesting is defined as the method in which the conversion of energy from airflow or wind energy to electrical energy occurs. In wind energy harvesting, a specified-sized wind turbine is used. Further, the wind turbine exploited the linear motion due to wind for the generation of electrical power [33]. Wind energy harvesting is explained in Figure 6.

Biochemical energy harvesting is defined as the method in which electrochemical reactions are used for the conver-

sion of endogenous substances and oxygen to electrical energy [34].

Acoustic energy harvesting is defined as the method in which a resonator or transducer is used for the conversion of acoustic waves to electrical power [35]. Acoustic energy harvesting is illustrated in Figure 7.

Hybrid energy harvesting is defined as the method of combining any harvesting technologies and further concurrently using this hybrid model on a single platform. The concept of hybrid energy harvesting is illustrated in Figure 8.

In the current era of IoT, nanoenergy-based technology is booming which is known as nanogenerators. Further, nanogenerators are having the capability of harvesting energy from the surroundings and efficiently utilizing that harvested energy for facilitating the tiny sensors and other portable electronic devices. In a more general way, we can define the nanogenerators as the energy harvesting device for generating electrical energy from ambient mechanical energy. The nanogenerators are classified into four major categories such as piezoelectric nanogenerators (PENGs), triboelectric nanogenerators (TENGs), thermoelectric generator (TEGs), and

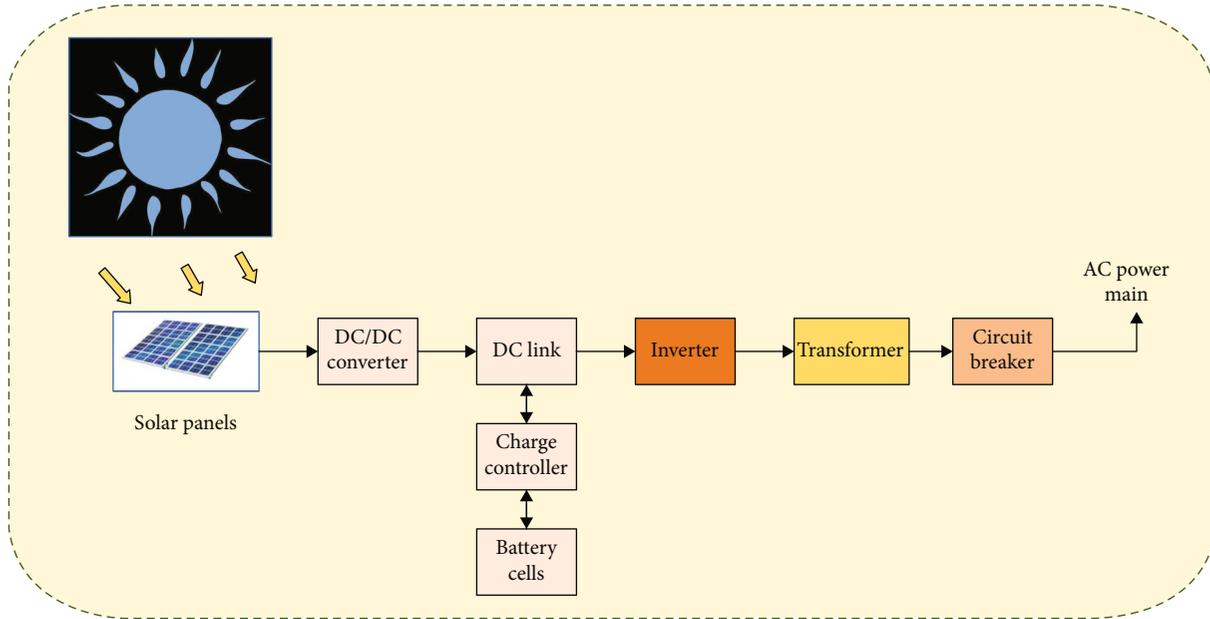


FIGURE 4: Solar energy harvesting mechanism.

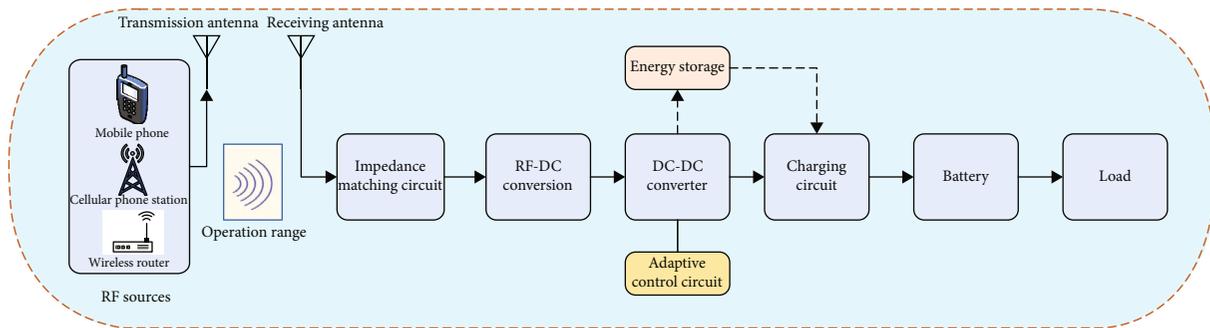


FIGURE 5: RF energy harvesting mechanism.

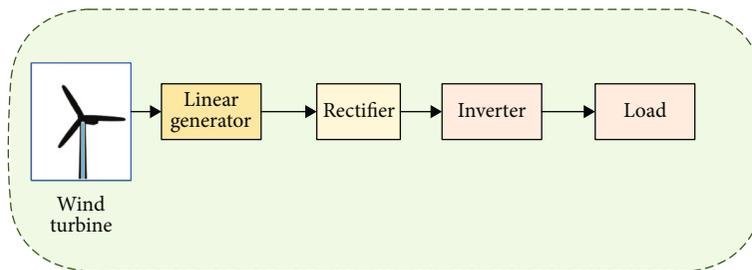


FIGURE 6: Wind energy harvesting mechanism.

pyroelectric nanogenerators (PyENGs) which are based on piezoelectric, triboelectric, thermoelectric, and pyroelectric effects, respectively. Further, piezoelectric nanogenerators (PENGs) are based on the piezoelectric effect. Next, the mechanism of triboelectrification, as well as electrostatic induction, is utilized in triboelectric nanogenerators (TENGs). Whenever the two dissimilar materials are brought into contact, then the charge is generated on the surface; this complete mechanism is known as triboelectrification; on the

other hand, in the electrostatic induction mechanism, the flow of electrons from one electrode to another electrode through an external load causes an electricity generation. Furthermore, thermoelectric generators (TEGs) utilized the phenomenon of converting the temperature difference into electric voltage. Besides, pyroelectric nanogenerators (PyENGs) utilized nanosized pyroelectric materials for converting thermal energy to electrical energy; therefore, pyroelectric nanogenerators (PyENGs) are considered as

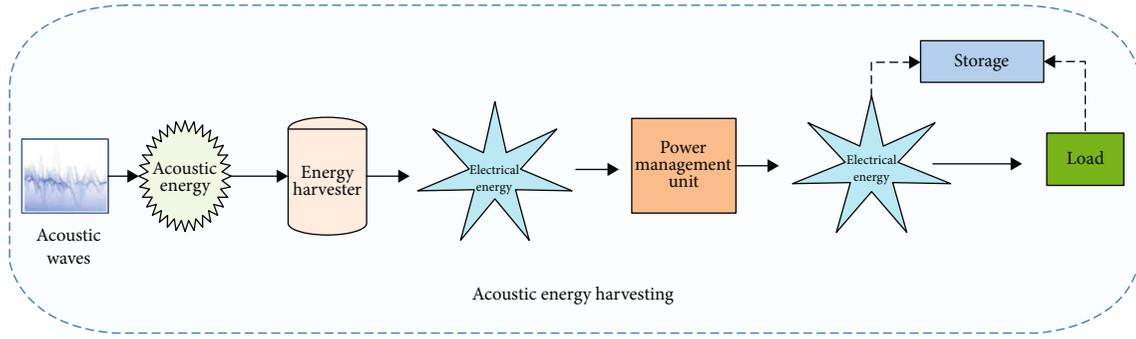


FIGURE 7: Acoustic energy harvesting mechanism.

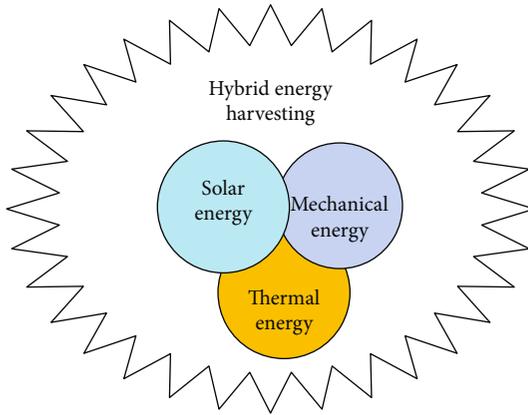


FIGURE 8: The concept of hybrid energy harvesting mechanism.

futuristic energy harvesting devices with enormous capability [36, 37].

Furthermore, in the case of a linear and rotatory generator for energy harvesting [38, 39], the motion of the wave provides irregular mechanical energy. Further, this form of mechanical energy is needed to convert into regular mechanical motion. Next, there exist two types of motions, namely, linear or rotational. The rotational motion is dedicated for driving a turbine, and then, the rotating electrical generator is driven. But the linear motion is responsible for driving a linear electrical generator. Figure 9 illustrates the role of linear generator in converting ocean wave energy to electrical energy.

In the energy harvesting mechanism, there exists specific hardware which is known as an energy harvester and it is responsible for converting the environmental energy to electrical energy. Further, there is a need for efficient conversion of harvested energy to electrical energy and then appropriately conditioned by the power management circuit to an appropriate form then energy is stored in the energy storage elements, and finally, electrical energy can be utilized either for energizing the batteries or directly providing the supply to the load.

3.1. Role of Energy Harvesting Techniques in WSNs. The energy harvesting techniques have played a significant role in uplifting the overall performance of WSNs. The summary

of key benefits is elaborated in a pointwise fashion in the following section.

- (1) The energy harvesting technique in WSN provides an alternative source of energy to sensor nodes (SNs) by utilizing the harvested energy from the environment, and in this way, this technique plays a major role in reducing the dependency on battery power. One of the main research areas in the field of WSN is energy efficiency, and various mechanisms have been developed to reduce the power consumption of SNs. The harvested energy may be used sufficiently for sensor node operation and further this technique can eliminate the use of the battery
- (2) WSN is specially deployed in risky environments for sensing particular events in which regular access to sensor nodes is very difficult or even not possible after deployment; here, a continuous power supply is needed for the sensor node's operation and this is only possible by utilizing energy harvesting technology in WSN. Sensor nodes can operate continuously by utilizing harvested energy from natural sources from environments
- (3) WSN is deployed with the aim for long-term uninterrupted monitoring of a particular event, and this is the primary goal of any already deployed WSN. The energy harvesting technique can fulfill this aim by providing a continuous supply of energy to sensor nodes till the harvested energy is available from the environment; with this technique, sensor nodes can perform their basic tasks for decades
- (4) Traditional WSNs are suffering from the high cost of maintenance. In these WSNs, the maintenance mechanisms consist of replacing a large number of batteries in due time and also regular visits to sites for checking the health of batteries. This maintenance cost can be significantly reduced by using energy harvesting techniques. No regular visits are needed in the case of EH-WSNs; also, energy harvesting eliminates the general need for batteries, and therefore, in this technique, the costs of maintenance are significantly decreased

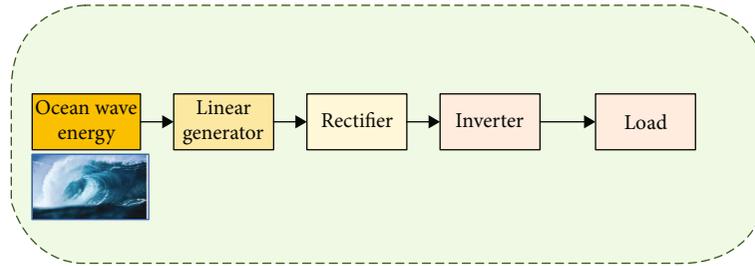


FIGURE 9: Ocean wave energy converted to electrical energy.

- (5) The overall average cost of installation for WSN having an energy harvesting mechanism is low as compared with traditional WSN, although there is a need for harvester circuits and other hardware devices that add a particular cost to the installation. The overhead in the installation is also low in the case of EH-WSN

4. Classification of Energy Optimization Strategies for EH-WSNs

In traditional WSN, the remotely deployed energy constraint sensor nodes (SNs) require optimal energy optimization strategies for efficient utilization of capabilities of WSNs. Generally, traditional sensor nodes (SNs) are powered by limited capacity batteries that are attached to SNs and the use of SNs are particularly useful in an isolated and remote area, but the limited energy capabilities of SNs affected the performance in these remote areas. Further, in harsh challenging environmental conditions, it is very difficult or impossible to replace the batteries or energizing the batteries. Therefore, WSNs, which are powered by conventional batteries, are not able to provide long-lasting performance. The issue of the limited capacity of battery power has shifted the attention of researchers towards finding alternate sources of energy to energize the SNs by harvesting ambient energy. Therefore, the life span of WSN can be enhanced by utilizing the emerging technologies known as energy harvesting schemes, and further, energy optimization strategies can be used to effectively utilize the energy harvesting techniques. Also, these mechanisms achieve balance in the energy for the overall network.

The uniqueness in this systematic survey is that we have considered the two views while conducting the survey, first considering the current enhancements in energy optimization strategies while in parallel comparing with the traditional approaches for handling energy scarcity issues. This overall systematic survey broadly consists of two branches, namely, energy harvesting techniques coupled with energy optimization strategies for efficiently utilizing the harvested energy.

The aim of conducting the survey about energy optimization strategies is to handle the challenging issue of energy scarcity, and in this way, we can keep the sensor nodes alive making the network more operational and efficient. It must be noted that in this systematic survey, we have studied the internal design details of the protocol with energy-saving

capabilities for understanding the limitations with abilities in dealing with the system with energy harvesting characteristics.

The role of energy optimization schemes for EH-WSNs is eventually to save energy which is considered as the primary issue for the EH-WSNs for achieving the specified objective. Extensive deep studies have been conducted for the classification of energy optimization schemes for EH-WSNs in the following categories by considering eleven factors, namely, radio optimization schemes, optimizing the energy harvesting process, data reduction schemes, schemes based on cross-layer optimization, sleep/wake-up policies, schemes based on load balancing, schemes based on optimization of power requirement, optimization of communication mechanism, schemes based on optimization of battery operations, mobility-based schemes, and finally energy balancing schemes. The ultimate aim is to discuss the energy optimization schemes for EH-WSNs for achieving energy efficiency by decreasing energy consumption and also achieving energy balance among sensor nodes. Figure 10 depicts the deep classification of energy optimization schemes for EH-WSNs.

4.1. Radio Optimization Schemes. Radio optimization schemes are further divided into three categories such as schemes based on power control in transmission, cooperative communication schemes, and also modulation optimization schemes. A brief discussion about all these schemes is provided below.

In WSN, one of the main units in which heavy energy consumption occurs is the radio module. Therefore, some power control mechanism is needed for transmission. In the adaptive transmission power control framework, a separate model representing the relationship between power needed for particular transmission and corresponding quality of the link is built by the separate node for their neighbors. Further, these models help in maintaining link quality over a period of time dynamically with the help of a feedback-based algorithm for power control in transmission [40].

Next, for designing optimal WSN, optimization of energy is a crucial factor that needs to be carefully addressed. Also, in WSN, the energy consumption part in the circuit module as compared with actual energy consumption that occurs in the transmission part may not be negligible, and further, both these parts need to be recorded separately. Therefore, the general optimization techniques for energy may not be sufficient in the case of WSN, which are responsible for reducing the energy in the transmission process. Also, it has been

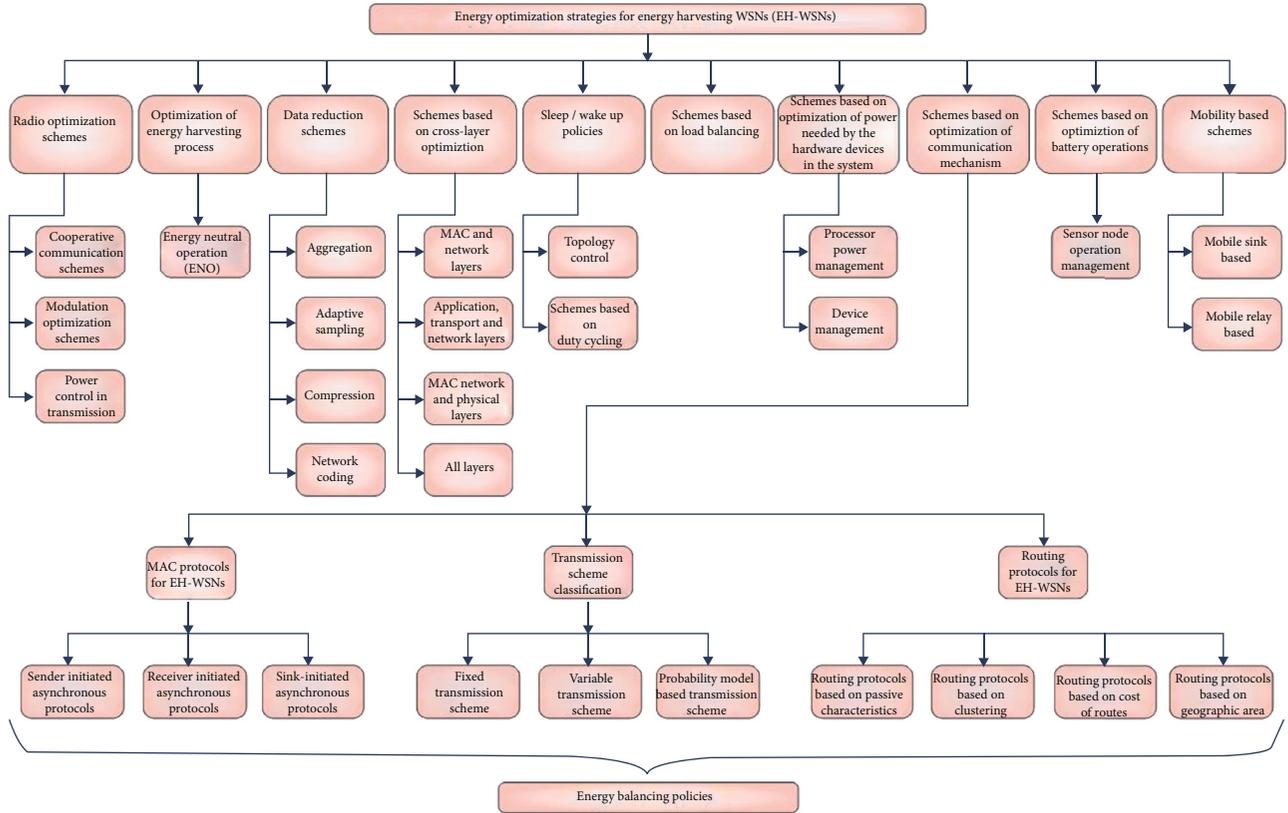


FIGURE 10: Deep classification of energy optimization schemes for EH-WSNs.

proved in the literature that two prominent factors, namely, energy consumption and delay in transmission, can be minimized under the cooperative environment among the sensor nodes in WSN for transmitting and/or receiving information [41, 42].

Next, it should be noted that in communication link with point-to-point connection and for applications having shorter distance, one traditional fact that higher transmission duration results in minimum energy consumption may be false if energy consumption in circuit module is significantly considered. Also, the transmission time should be maximum in order to minimize the energy requirement in the transmission process. Further, there is a need of optimizing the transmission time for overall minimizing the total energy consumption in WSN [43, 44].

4.2. Optimization of Energy Harvesting Process. The research area towards the energy harvesting techniques is getting much higher attention by the researcher currently, and lots of research is going on exploring the optimal use of energy harvesting technique. The research activities on energy harvesting area can be broadly categorized into two categories such as optimal design and development of energy harvesting framework, and next category deals with efficiently storing the generated charge and this is possible only by proficiently designed capable electronic circuits. The microelectronic devices used in the harvesting process need to be optimized for reducing the overall energy consumption in the system. There exist a large number of literature discussing the opti-

mization of energy harvesting mechanism; we are highlighting a few of the literature as follows.

Buchli et al. [45] have presented a unique scheme for dynamically adjusting the performance level of the system by designing an efficient power subsystem, and in this way, uninterrupted energy-neutral operation can be achieved in solar EH-WSNs. Next, Reis et al. [46] have discussed about the need of optimizing the extraction circuits for efficient utilization of the energy harvesting mechanism. Further, Tai and Zuo [47] have conducted a two-variable optimization analysis for deriving the exact optimization conditions for maximum power. Furthermore, Cai and Harne [48] have proposed an optimal optimization framework at the system level, particularly for a nonlinear vibration energy harvester. Besides, Fouad [49] has discussed the important role of the rectifier in energy harvesting applications and proposed an efficient CMOS rectifier.

4.3. Data Reduction Schemes. The data reduction schemes can be further classified as schemes based on aggregation, compression, adaptive sampling, and also network coding. A brief discussion about all these schemes is provided below.

In WSN, one of the ways to save energy is by efficiently handling the transmitted data. The aim of data aggregation schemes is to collect the sensitive data from the sensor nodes in the network and further sent it to the base station with lower data latency. Environment monitoring requires fresh data, and therefore, data latency is playing a crucial role in various monitoring applications [50]. It is a very tedious step

or even impossible to access all original data after performing the aggregation function. The success of gaining original data depends on the type of aggregation function. There are two approaches, namely, lossy and lossless. In the lossless approach, there exists a high possibility of gaining the original data without error. For selecting a particular approach, various factors need to be evaluated such as application area, rate of data transmission, and network characteristics [51].

Further, the data samples should be minimum for energy conservation schemes. The impact of reduced data samples also results in the decrement of the total number of communications and thereby maintaining energy efficiency. Further, spatiotemporal correlations can be utilized for reducing the data samples and such type of scheme is known as adaptive sampling. Here, a joint approach covering the features of both temporal and spatial correlations can be used to minimize the total amount of data that is needed to be acquired [52]. Furthermore, in WSN, the number of transmissions can be further reduced by using the characteristics of multiple data packets coding scheme. This mechanism results in a reduced number of transmissions because multiple data packet coding occurs within a single transmission [53].

4.4. Schemes Based on Cross-Layer Optimization. The cross-layer optimization schemes can be further classified as MAC and network layers; application, transport, and network layers; MAC, network, and physical layers; and finally all layers. A brief discussion about all these schemes is provided as follows.

Bouabdallah et al. [54] have presented a joint cross-layer framework considering MAC and network layers. For enhancing the lifetime of the network, energy-efficient protocols are needed. They proposed the scheme for traffic balancing at the network layer, and further, they proposed another scheme for controlling the retry limit of retransmissions at the MAC layer. In the proposed framework, energy efficiency is achieved by controlling the retry limit and thereby contributing towards enhancing the lifetime of the network.

You and Liu [55] have formulated a problem for maximizing the lifespan of the network which is known as a cross-layer problem. The counterpart of the formulated cross-layer problem can be decomposed into several individual subproblems such as problem for the application layer with the focus on improving the lifetime, problem for transport layer with the focus on controlling the source rate, and problem for network layer with the focus on optimizing the routing efficiency. Further, the subgradient methods are used for solving the dual problem.

Lee et al. [56] have presented a cross-layer optimization framework for improving system performance. Further, they suggested that this joint optimization framework efficiently handles the communications especially in the case of delay-constraint applications. The mechanism of the proposed cross-layer optimization framework can be illustrated with consideration of different individual protocol layers such as MAC layer for power allocation, network layer for optimal routing, and physical layer for energy management.

Phan et al. [57] have presented a cross-layer design in the form of an optimization problem with two stages. The first

stage of the optimization problem is dedicated for maximizing the total number of admitted sensor nodes. Further, the second stage is aimed at enhancing the network lifetime. Therefore, this cross-layer design is covering all layers. Next, they have also shown that the optimization problem having only one stage with a compact and precise mathematical framework can be derived from the two-stage optimization problem.

4.5. Sleep/Wake-Up Policies. The sleep/wake-up policies can be further classified as schemes based on topology control and also schemes based on duty cycling schemes. A brief discussion about topology control schemes is provided as follows.

Topology control framework is aimed at maintaining efficient connectivity or coverage in WSN. In this framework, each sensor node dynamically adjusts the power for optimal transmission. Also, each sensor node selects the appropriate neighboring sensor nodes set for direct communication. All these steps in the topology control framework contribute towards the conservation of energy at each sensor node and consequently enhance the network lifetime.

The optimal deployment of WSN requires careful handling of two crucial factors, namely, network coverage and connectivity. Further, area monitoring applications need proper coverage of networks with efficient connectivity; therefore, the success of area monitoring applications primarily depends on these two prominent factors. Also, there may exist a probability of coverage area redundancy issue and this redundancy should be minimum for optimal resource utilization by the resource constraints sensor nodes in the WSN [58]. Next, the cooperative topology control framework has been presented in [59] and this framework is a distributed topology control scheme with the objective of maximizing the overall lifetime of the network.

Next, a detailed review for duty cycling schemes is provided in tabular form as described in Table 2.

4.6. Schemes Based on Load Balancing. A brief discussion about various schemes based on load balancing is provided below.

Liu et al. [92] present various strategies for enhancing the performance of EH-WSNs with a focus on three areas, namely, efficient scheduling, energy-efficient relaying, and finally optimizing the medium access control layer protocols. Next, Cai et al. [93] have presented a new routing algorithm for EH-WSNs in which the flow of load is maximized under the life span of the network; also, in this framework, energy consumption is balanced for prolonging the lifetime of the network. Here, residual energy is considered as a prominent factor for updating the transmission capacity between any two particular sensor nodes. Further, Wu et al. [94] have proposed an efficient energy-balanced routing framework that is based on an autonomous load regulating scheme for rechargeable WSN. In this framework, significant steps are taken to control the relay radius, and consequently, nodes become capable of adjusting their load. Furthermore, Chai and Zeng [95] have presented a routing scheme for EH-WSNs with efficient load balancing characteristics. This

TABLE 2: A detailed review of duty cycling schemes for EH-WSNs.

Year	Author and reference details	Metric used for evaluating performance	Bullet points	Future research directions
2004	Kansal et al. [60]	Latency factor	<ul style="list-style-type: none"> (i) An analytically tractable characterization model is proposed. (ii) Also, a harvesting theory is proposed. (iii) Further, a solar energy harvesting circuit is proposed. (iv) Furthermore, environment-aware tasking methods are proposed. 	(i) The future research directions may include the steps for finding the appropriate framework consisting of estimation for the source characterization parameters with multiple energy harvesting techniques.
2006	Hsu et al. [61]	Utilization of energy	<ul style="list-style-type: none"> (i) An adaptive duty cycling algorithm is presented. (ii) In the proposed framework, the available energy is used for adjusting the duty cycle of sensor nodes. 	(i) Future work may include extending the proposed methods to exploit different power scaling frameworks, namely, dynamic voltage scaling (DVS), submodule power switching (SPS), and the use of multiple low power modes (MLPM).
2007	Moser et al. [62]	Violation of deadline	<ul style="list-style-type: none"> (i) An energy-driven scheduling scenario is presented. (ii) The energy variability characterization curves (EVCC) have been introduced in this article. 	<ul style="list-style-type: none"> (i) Future work may include extension towards multihop networks. (ii) Need for distributed energy management solutions.
2010	Lee et al. [63]	Throughput	<ul style="list-style-type: none"> (i) A duty cycling scheme is presented with awareness about the harvesting mechanism. (ii) In the proposed framework, the sleep time is adjusted dynamically. 	<ul style="list-style-type: none"> (i) Future work may include extending the works towards the multihop data delivery scheme. (ii) Further, future research directions include efforts towards the in-depth analysis of the energy harvesting process for transmission strategies.
	Li et al. [64]	Packet delivery ratio	<ul style="list-style-type: none"> (i) The scheduling problem is defined in terms of a partially observable Markov decision process. (ii) This article also presents that the formulated scheduling problem can be portioned as Markov decision process (MDP). 	<ul style="list-style-type: none"> (i) The simulations are based on a single group consisting of the source node, relay, and destination node. Future work may include an extension towards considering multiple groups. (ii) Future work may also include some more performance evaluation metrics.
2011	Ghor et al. [65]	Energy storage capacity & deadline miss rate	<ul style="list-style-type: none"> (i) An online scheduling mechanism is presented which is known as the earliest deadline with an energy guarantee (EDeg). (ii) Further online scheduling mechanism characterizes various objectives such as the source of energy, energy storage, energy consumption, and total time. 	(i) Future work may include the extension towards expanding the applicability of the scheduling framework by incorporating various techniques, namely, voltage scaling, frequency scaling, and dynamic power management, and then measuring the effectiveness of the proposed scheme.
	Audet et al. [66]	Violation rate of energy & battery charge level	<ul style="list-style-type: none"> (i) In this article, two scheduling algorithms have been presented, namely, smooth to average method (STAM) and smooth to full utilization (STFU). (ii) Further, these two scheduling algorithms are energy-aware and reduce the task violation likelihood. 	(i) The future work may include an extension towards evaluating the proposed scheme by incorporating the data acquisition application.
2012	Györke and Pataki [67]	Energy consumption	(i) This article suggests that a scheduling system with prediction capability should be used in	(i) The future research work may include the work towards performing the real-life testing of our assumptions.

TABLE 2: Continued.

Year	Author and reference details	Metric used for evaluating performance	Bullet points	Future research directions
			dynamically determining the sensors' measurement timing. (ii) This framework must have previous information about factors such as environment, sensors, experiments, and also about future prediction. (i) This article proposes an efficient energy management framework for enhancing QoS. (ii) The framework consists of dual steps, an offline step, and an online step. (iii) Next, prediction with frame-based energy harvesting is used for determining the appropriate QoS level in an offline step.	(ii) Further, our future research directions will refine the scheduling framework to generate more accurate outputs with fewer energy consumptions. (i) This article utilized the window-based QoS model in which deadline misses are handled by specific distribution patterns. (ii) Future work may include considering random/general distribution patterns for the window-based QoS model. (i) The future work may include an extension towards improving prediction quality. (ii) The future work will focus on the global information consisting of cloud cover or snow warnings that can be used for enhancing the accuracy in long-term prediction.
	Kooti et al. [68]	Violation count for QoS		
	Renner and Turau [69]	Root mean square error (RMSE)	(i) This article proposes the framework for replacing the static scheme for enhancing the effectiveness of existing forecasting algorithms.	
	Akgün and Aykın [70]	Life span of network	(i) This article proposes a framework for enhancing the life span of the network. (ii) In this framework, the scheduling scheme based on TDMA has been modified, and in this modified scheduling scheme, members will request a time slot based on their energy prediction. (iii) Next, the cluster heads will be responsible for assigning particular slots to members. (i) This article presents a framework for estimating the state of charge for a battery of sensor node by considering the two points (1) the current flow in the battery and (2) the battery voltage is used as a measure of absolute state of charge. (ii) Further, this article shows that appropriate prediction of the state of charge can be used for adaptively scheduling for operations having energy-neutral characteristics for multiple applications of sensor nodes.	(i) The future work may include the extension towards simulating the system in other simulation platforms such as NS3 and then assessing the system performance. (ii) The future research direction also considers other energy sources such as vibration or pressure and comparing our framework with MAC protocols other than LEACH.
2013	Sommer et al. [71]	State of charge for battery	(i) This article proposes a scheme for the scheduling of the dynamic reconfiguration for a sensor node. (ii) Further, this scheduling framework considers various factors such as statistical information on tasks and	(i) The future research direction may include efforts towards improving the prediction efficiency by incorporating some advanced methods such as recurrent neural networks or other alternatives. (i) The future work will explore other communication mechanisms that will be more energy-efficient in an energy harvesting environment.
	Li et al. [72]	Consumption of energy and time		

TABLE 2: Continued.

Year	Author and reference details	Metric used for evaluating performance	Bullet points	Future research directions
			available energy under an energy harvesting environment.	
	Chetto [73]	Energy and time constraints	(i) This article proposes a semionline scheduling algorithm that is based on the earliest deadline first methodology. (ii) Further, this framework depends on two specific factors such as energy demand and slack energy.	(i) The future work may include an extension towards incorporating fixed priority environments in the proposed framework. (ii) Next, extension towards supporting dynamic voltage and frequency selection technology. (iii) Furthermore, the extension towards considering the smallest harvester etc.
2014	Castagnetti [74]	Packet reception ratio & energy efficiency	(i) This article proposes the power management framework for EH-WSNs. (ii) Next, the proposed framework utilized two factors, namely, optimization of duty cycle and power control in transmission.	(i) The future work may include extension towards considering various adaptation methodologies, namely, adaptive modulation and coding for improving the performance and energy efficiency.
	Li et al. [75]	Total number of executed tasks	(i) This article proposes the task scheduling scheme utilizing prediction data, and further, this framework is based on weather forecasts in EH-WSNs.	(i) The future work may include extension towards exploring the advantages of weather forecasting data for longer scheduling.
	Liu et al. [76]	Energy utilization & deadline miss rate (DMR)	(i) In this article, an intratask scheduling scheme is presented for the storage-less and converter-less channels. (ii) Next, this framework utilizes neural network training.	(i) The future work may include extension towards utilizing the learning automata in place of the neural network and then assessing the system performance.
2015	Zhang et al. [77]	Total number of ready tasks & deadline miss rate (DMR)	(i) This article proposes the scheduling algorithm utilizing the neural network for determining the appropriate scheduling pattern, the optimal size of the capacitor, and finally queue of tasks for improving the deadline miss rate.	(i) The future work may include extension towards utilizing other alternatives in place of ANN such as learning automata for further enhancing the deadline miss rate.
	Ali [78]	Lifetime of battery & consumption of power	(i) This article proposes the event-driven duty cycling framework for reducing the power consumption of the roadside unit which are having self-powered capabilities.	(i) The future work may include extension towards modifying the proposed framework by including few more factors, such as the weather conditions, for enhancing the performance of the distributed power management scheme.
2016	Gomez et al. [79]	Efficiency of system	(i) This article proposes an efficient energy management unit to maintain power supply especially in those circumstances in which the harvested power is not sufficient for smooth system operation.	(i) In the proposed work, optimal-sized buffer is used and the future work may include the variable-sized buffer and then measuring the system efficiency.
	Zhang et al. [80]	Efficiency in energy utilization & deadline miss ratio (DMR)	(i) This article proposes a new scheduling framework. (ii) Next, this framework consists of various key attributes such as power prediction, task priorities are defined	(i) The future work may include extension towards exploring the scheduling framework with different energy sources such as thermal,

TABLE 2: Continued.

Year	Author and reference details	Metric used for evaluating performance	Bullet points	Future research directions
			by using an artificial neural network, and finally an algorithm for selecting the task.	wireless, and vibration and also some hybrid approaches.
	Oueis et al. [81]	Harvested energy, battery residual energy, and battery level variation	(i) This article discusses the effect of photovoltaic energy harvesting on the duty cycle of sensor nodes in both scenarios outdoor and indoor.	(i) The future work may include extension towards evaluating and comparing several other performance metrics such as end-to-end delay and packet delivery ratio.
	Housseyni et al. [82]	Success ratio for deadline	(i) This article proposes a new scheduling framework for a sporadic task model. (ii) Next, an energy-efficient offline task assignment heuristic is generated by the proposed framework.	(i) The future work may include an extension towards exploring the proposed framework in which arrival times are characterized with probabilistic distributions.
	Maeda et al. [83]	End-to-end delay, total number of packets sent to base station (sink) per cycle, and the fairness index for the node position	(i) This article proposes a task scheduling scheme in which data is periodically collected from the sensor nodes.	(i) In this article, line topology is used for simulating the sensor network and future work may include extension towards adopting other topology and then measuring the performance of the system.
2017	Sanchez et al. [84]	Final remaining energy of sensor node	(i) The energy management strategy is based on a hybrid dynamical system approach. (ii) The combination of continuous physical processes results in the hybrid nature; on the other hand, change in the functioning modes results in the discrete concept.	(i) In the current work, the sensor nodes' energy is modeled using a specific representation named as a hybrid dynamical systems representation; future work may include modeling the energy with other representations and then measuring the performance.
	Huang et al. [85]	Optimal expected rewards	(i) This article proposes a scheduling policy for EH-WSNs based on the threshold value. (ii) In this framework, limited memory is needed for storing optimal threshold values at the sensor node for carrying out energy management activity.	(i) The future work may include an extension towards utilizing Markov channels for energy harvesting systems. (ii) In this scenario, the system state will be represented by data packets, energy, and the state of the wireless channel.
2018	Bengheni et al. [86]	Mean latency, throughput, and packet delivery ratio (PDR)	(i) This article proposes the enhanced energy management scheme in EH-WSNs. (ii) Further, this framework utilizes receiver-initiated communication. (iii) Next, a policy based on the energy threshold is used for controlling the active/sleep periods.	(i) Future work may include extension towards considering other performance metrics such as average energy consumption and network lifetime.
	Anagnostou et al. [87]	Rate of execution and energy efficiency	(i) This article proposes a hardware scheduling framework that is power-aware. (ii) Next, this framework also observes harvesting power. (iii) Further, the available energy along with the software module is used to dynamically activating the other system modules.	(i) Future work may include extension towards using the dynamic schedulers and also supporting the interruptible tasks.
	Galmés and Escolar [88]	Energy consumption	(i) This article discusses solar energy harvesting-based WSN for monitoring	(i) Future work may include extension towards using other software (with

TABLE 2: Continued.

Year	Author and reference details	Metric used for evaluating performance	Bullet points	Future research directions
	Cui [89]	Mean relative error, and root mean square error	<p>the environment.</p> <p>(ii) In this article, an analytical approach is used for enforcing the duty cycle.</p> <p>(i) This article proposes the solar energy prediction method which is based on long short-term memory recurrent neural network.</p> <p>(ii) Also, a predictive task scheduling framework is proposed based on the prediction of energy available for improving the overall performance of the WSN.</p>	<p>corresponding hardware) platforms.</p> <p>(ii) Next, geographic latitude and meteorological conditions of the deployment should be used for refining the energy harvesting model.</p> <p>(i) Future work may include extension towards using other alternatives in prediction such as gated recurrent unit (GRU) and bidirectional LSTM (bi-LSTM) and then measuring the performance.</p>
2019	Sommer et al. [90]	Average tracking error	<p>(i) In this article, a scheduling framework is presented which is having awareness about energy and mobility for achieving long-term tracking.</p> <p>(ii) This framework calculates the virtual energy budget for forecasting energy.</p>	<p>(i) The future work may include extension towards incorporating some more advanced algorithms or some hybrid approach consisting of several methods for efficiently predicting energy harvesting.</p>
2020	Zhang et al. [91]	Common active time (CAT)	<p>(i) This article discusses the stochastic duty cycling problem and studies it under three cases (offline, online, and correlated stochastic duty cycling) to maximize utilization efficiency. Also, an offline algorithm is designed for the offline case with optimal performance.</p>	<p>(i) The point-to-point model can be extended to the networked case, such as multihop networks, where each device may have more than one neighbor. In multihop networks, the different pairs of neighboring nodes can be assigned with different periods by the coloring technique.</p>

framework can handle real-time traffic efficiently by providing optimal routes.

4.7. Schemes Based on Optimization of Power for the Hardware Devices. Schemes based on optimization of power can be further classified into two categories such as processor power management and device management. A brief discussion about these schemes is provided below.

The rapid development in the IC fabrication technology and current innovations in semiconductor technology results in a tremendous transformation in the field of high-performance computing such as starting from the development of single-core architecture to multicore architecture with homogeneous characteristics and then multicore architecture with heterogeneous and dynamic reconfigurable characteristics. This rapid development further imposes a challenge in terms of increment in power density as well as heat dissipation and consequently affected the system reliability and availability. Currently, research is going on achieving high performance with low power consumption. Nagalakshmi and Gomathi [96] have presented various effective techniques for overall reducing the power dissipation in multicore processing architecture. Further, there is an urgent need to handle power management issues for designing effi-

cient microprocessors in current scenarios of high-performance computing. The ultimate goal is to maximize the performance of the processor with low power consumption. The role of power management techniques is to maintain the balance between higher performance and power consumption with aggressive thermal effects. Next, Attia et al. [97] have explored the various schemes for managing the power in multicore processing architecture.

The designing of an electronic system should be harvesting-aware from two perspectives such as the hardware and software perspectives for achieving optimal performance in the energy harvesting environment. Also, the efficiency of the harvesting system can be enhanced by utilizing a proper power management framework with harvesting-aware characteristics. Further, an efficient power management framework will enable the harvesting system to operate uninterruptedly and achieve the expected objectives. One of the prominent operating modes is the energy-neutral mode that can provide assurance about longer system operation [98]. Further, an efficient and proper functional power management framework is the need of the hour in the current high-performance demanding environments for an energy harvesting device. The harvested energy is stored in the energy storage element until enough energy is currently

available to enable the sensor nodes to complete the desired task [99].

4.8. Schemes Based on Optimization of Communication Mechanism. Schemes based on optimization of communication mechanism can be further classified into three major categories, namely, MAC protocols for EH-WSNs, transmission schemes classification, and also routing protocols for EH-WSNs. A brief discussion about all these schemes is provided below.

4.8.1. MAC Protocols for EH-WSNs. These are further categorized into three categories such as sender-initiated asynchronous protocols, receiver-initiated asynchronous protocols, and also sink-initiated asynchronous protocols. Tables 3–5 are used to briefly describe each respective category clearly as follows.

(1) *Sender-Initiated Asynchronous Protocols.* Three MAC protocols are described in this category in Table 3, and these include EL-MAC [100], RF-MAC [101], and also DeepSleep [102].

(2) *Receiver-Initiated Asynchronous Protocols.* Six MAC protocols are described in this category in Table 4, and these include ODMAC [103], EH-MAC [104], QAEE-MAC [105], ERI-MAC [106], LEB-MAC [92], and also ED-CR and ED-PIR MAC [107].

(3) *Sink-Initiated Asynchronous Protocols.* Four MAC protocols are described in this category in Table 5, and these include PP-MAC [108], MTPP-MAC [109], RF-AASP [110], and also AH-MAC [111].

4.8.2. Transmission Schemes Classification. Transmission schemes are divided into three categories, namely, fixed transmission schemes, variable transmission schemes, and also probability model-based transmission schemes. These schemes are briefly described below.

(1) *Fixed Transmission Schemes.* Reddy and Murthy [112] have effectively addressed the power management issue in EH-WSNs. They have proposed the framework that is based on the approach of energy-neutral for managing the power efficiency issues in communication and therefore enhancing the utility of sensor nodes that are utilizing the harvested energy. The designing of this framework clearly incorporates three factors such as fixed power consumption in the circuits, inefficiencies of battery, and finally storage capacity.

(2) *Variable Transmission Schemes.* The energy harvesting mechanism is considered as the prominent solution for sustained WSNs. In EH-WSNs, two important factors need to be considered while designing the optimal transmission policies such as the mechanism of energy refreshing and the storage constraints for rechargeable batteries. Tutuncuoglu and Yener [113] have tried to address these issues with optimum solutions. The proposed framework specifically tried to determine the transmission policy that enhances the data

transmission rate in a bounded timeline. Finally, the proposed framework determined the optimum transmission policies with constraints such as the mechanism of energy refreshing and the storage constraints for rechargeable batteries. The mechanism of energy refreshing considers the model having discrete packets for energy arrivals. Next, the energy harvesting technique usually suffers from two vibrant issues such as instability and random behavior in harvested energy and these two issues need to be tackled efficiently since these issues cause temporal death of sensor nodes and thereby making a negative impact on the quality of service and overall performance starts degrading. Tang and Tan [114] have proposed the framework which considers the case of temporal death and analyzes the behavior of energy harvesting devices for data transmission characteristics, and further, the proposed framework determines the optimal transmission policy.

(3) *Probability Model-Based Transmission Schemes.* Berbakov et al. [115] have presented the approach for determining the optimal joint transmission scheme in a particular scenario consisting of two sensor nodes in which one is battery operated and another one is operated purely based on the harvested energy. Also, in this framework, the common message is transmitted to the base station cooperatively. The ultimate aim is to find the optimal joint transmission scheme for maximizing the throughput with the bounded deadline. Next, Michelusi et al. [116] have proposed an approach for handling the issue of uncertainty in estimating the state of charge for rechargeable batteries since it is almost impractical or very costly to accurately estimate the state of charge for the rechargeable battery. Also, the proposed approach noted the impact of deficient information about the state of charge on WSNs.

4.8.3. Routing Protocols for EH-WSNs. The energy scarcity issue of sensor nodes is an evergreen research area for both traditional WSNs and also for EH-WSNs. In the case of traditional WSNs, sensor nodes operated with limited capacity battery usually start struggling for providing optimum performance after specified time duration, and as a result, the performance of the network starts degrading, and there is a need for efficient utilization and management of harvested energy in case of EH-WSNs. Therefore, the energy issue is considered as a primary factor in designing routing protocols for both traditional WSNs and for EH-WSNs. Further, routing protocols for EH-WSNs are divided into four major categories, namely, routing protocols based on the cost of routes, based on passive characteristics, based on geographic area, and also based on clustering. These are briefly described as follows.

(1) *Routing Protocols Based on Cost of Routes.* Pais et al. [117] have presented a newly designed function reflecting cost-benefit for EH-WSNs. Their research work consists of the main innovation in terms of a new routing cost metric. Further, this routing cost metric is utilized for prolonging the lifetime of the sensor network. Next, Martinez et al. [118] have proposed an efficient framework for selecting the routes.

TABLE 3: Sender-initiated asynchronous protocols.

Year	Author and reference details	Proposed MAC protocol	Metric used for evaluating the performance	Hops count	Bullet points	Future research directions
2014	Kim et al. [100]	EL-MAC	Throughput, and energy efficiency	Single hop	(i) A new MAC protocol has been presented for EH-WSNs which is known as MAC protocol with consideration of the different levels of energy. (ii) The energy efficiency as well as higher throughput has been ensured in the proposed framework. (iii) The proposed framework also provides a strategy for efficient sensing by giving the highest priority to users having a lower energy level for ensuring the communication opportunity.	(i) Future research directions may consider the work towards the evaluation of the proposed scheme under different energy harvesting environments.
	Naderi et al. [101]	RF-MAC	Harvested energy and throughput	Multihop	(i) A new MAC protocol has been presented for EH-WSNs which is known as radiofrequency energy transferring MAC. (ii) The proposed MAC protocol is optimizing the sensor node's energy delivery. (iii) The proposed framework reduces the disruption in the communication mechanism.	(i) Future research directions may consider the work towards enhancing the optimization of spectrum selection mechanism by using some advanced efficient optimization technique.
2015	Lin et al. [102]	DeepSleep	Energy efficiency, application layer loss rate, and outage probability	Single hop	(i) A new MAC protocol has been presented for EH-WSNs which is known as DeepSleep MAC. (ii) The proposed MAC protocol is significantly reducing the collision probability, outage probability, and also application layer loss rate; on the other hand, energy efficiency has been increased. (iii) The proposed framework considered fairness in the access mechanism during the design step.	(i) Future research directions may consider the work towards formulation of complex optimization problem concerning to relationship among multiple parameters which are part of the proposed framework. (ii) Next, multiple sleep probability values may be considered for applying to various devices for guaranteeing the packet delay time. (iii) Further, the energy harvesting 802.11ah devices may be explored for analyzing the design space.

Special emphasis has been given to the amount of the wastage of network energy which is generally not considered in the previous literature while selecting the appropriate routes. The main source of this network energy wastage is due to overcharging of limited capacity batteries in the network, and this is the main innovation in this framework. Therefore, this framework achieves higher levels of residual energy by reducing energy consumption.

(2) *Routing Protocols Based on Passive Characteristics.* The routing protocols based on passive characteristics utilize the past information about the network and do not actively consider the current state of the network for constructing the routing tables. Further, Kollias and Nikolaidis [119] have implemented a seasonally aware routing protocol. In this routing protocol, two factors are considered for the construction of routing tables such as solar energy harvesting rates

and information about the several routes created in the past years. These passively attributed routing protocols are having an advantage in the specific scenario in which they reduce the wastage of energy in routes establishment overhead in the network, but on the other side, if a particular sensor node dies, then these protocols unable to recover it due to their passive nature.

(3) *Routing Protocols Based on Geographic Area.* Jumira et al. [120] have proposed an efficient geographic routing scheme for EH-WSNs. The salient features of this energy-efficient beaconless geographic routing consist of loop-free nature with minimum communication overhead and stateless, and also, this routing does not require any prior knowledge about the neighborhood for communication. Further, the mechanism of this routing framework is different from other geographic routing and it started by first sending the data

TABLE 4: Receiver-initiated asynchronous protocols.

Year	Author and reference details	Proposed MAC protocol	Metric used for evaluating the performance	Hops count	Bullet points	Future research directions
2011	Fafoutis and Dragoni [103]	ODMAC	Ratio of harvested energy and consumed energy, average delay, average sensing period, and load balancing	Single hop	(i) A new MAC protocol has been presented for EH-WSNs which is known as on-demand MAC. (ii) The proposed MAC protocol is capable to support a separate duty cycle for sensor nodes having different energy levels.	(i) Future research directions may consider the work towards using the retransmission mechanism and further consideration of the lossy environment for its evaluation. (ii) Next, future research directions may consider the work towards handling hidden node problems by utilizing the CTS/RTS scheme.
2012	Eu and Tan [104]	EH-MAC	Network capacity, fairness, and throughput	Multihop	(i) A new MAC protocol has been presented for EH-WSNs which is known as EH-MAC. (ii) The proposed MAC protocol has utilized probabilistic polling for reducing the collisions among data packets. (iii) Also, in the proposed framework, polling packets are dynamically adjusted for reducing interference.	(i) Future research directions may consider the extension towards using an advanced scheme for energy management with some smart scheme for collision resolution among the packets.
	Kim et al. [105]	QAEE-MAC	Delay and total energy saving	Single hop	(i) A new MAC protocol has been presented for EH-WSNs which is known as quality-of-service-aware energy-efficient priority-based MAC. (ii) The receiver node's energy consumption has been significantly minimized by adjusting its wake-up duration as per the energy profile.	(i) Future research directions may consider the extension towards using some advanced metric for duty cycle evaluation such as the expected number of duty cycle wake-ups and using the concept of the dynamic and heterogeneous duty cycle.
	Nguyen et al. [106]	ERI-MAC	Delivery latency and energy efficiency	Single hop	(i) A new MAC protocol has been presented for EH-WSNs which is known as energy-harvested receiver-initiated MAC. (ii) The proposed framework utilized the queueing scheme for adjusting the sensor node operation.	(i) Future research directions may consider the extension towards using various harvesting models and then analyzing the effects on ERI-MAC. (ii) Next, future research directions may consider the work towards extending the packet concatenation scheme.
2014	Liu et al. [92]	LEB-MAC	End-to-end delay, sender duty cycle, delivery ratio, collision ratio, and fairness index	Single hop	(i) A new MAC protocol has been presented for EH-WSNs which is known as load and energy balancing MAC. (ii) The proposed scheme utilized the fuzzy control technique for determining the duty cycles of sensor nodes.	(i) Future research directions may consider the extension towards using other techniques for determining the duty cycles of sensor nodes such as probabilistic controller, approximation algorithm, and nonlinear function controller in place of fuzzy control technique.
	Varghese Rao [107]	ED-CR MAC & ED-PIR MAC	End-to-end delay, energy consumption, and packet delivery ratio	Multihop	(i) Two new MAC protocols have been presented for EH-WSNs. The first MAC scheme utilized exponential decision along with the current state of residual energy	(i) Future research directions may consider the extension towards using some other advanced approaches for duty cycle adjustment and then measuring

TABLE 4: Continued.

Year	Author and reference details	Proposed MAC protocol	Metric used for evaluating the performance	Hops count	Bullet points	Future research directions
					and the second scheme utilized exponential decision along with increment in residual energy prospectively. (ii) The first proposed scheme utilized the dynamic approach with consideration of the current state of residual energy for duty cycle adjustment step. Further, the second proposed scheme attains energy efficiency by minimizing the duty cycle off time.	the performance under different harvesting models.

TABLE 5: Sink-initiated asynchronous protocols.

Year	Author and reference details	Proposed MAC protocol	Metric used for evaluating the performance	Hops count	Bullet points	Future research directions
2011	Eu et al. [108]	PP-MAC	Throughput, fairness, and interarrival times	Single hop	(i) A new MAC protocol has been presented for EH-WSNs which is known as probabilistic polling MAC. (ii) The proposed framework considers the unpredictable behavior of the energy harvesting mechanism for achieving optimal performance.	(i) Future research directions may consider the work towards developing and evaluating the MAC protocol for multihop scenarios.
	Fujii and Seah [109]	MTPP-MAC	Scalability, throughput, and fairness	Multihop	(i) A new MAC protocol has been presented for EH-WSNs which is known as multitier probabilistic polling MAC. (ii) The proposed framework utilizes the multitier probabilistic polling scheme for optimal delivery of data in EH-WSNs.	(i) Future research directions may consider the work towards considering other energy harvesting environments since the current proposed scheme utilizes the solar energy harvesting environment.
2016	Nguyen et al. [110]	RF-AASP	Energy efficiency, delay, and throughput	Single hop	(i) A new MAC protocol has been presented for EH-WSNs which is known as RF-adaptive active sleep period MAC. (ii) The proposed framework reduces the network contention level and enhances the harvested energy thereby achieving energy efficiency.	(i) Future research directions may consider the work towards considering other energy harvesting environments since the current proposed scheme utilizes the RF energy harvesting environment.
2017	Al-Sulaifanie et al. [111]	AH-MAC	Energy consumption, nodes alive, delivery ratio, and normalized performance metrics	Multihop	(i) A new MAC protocol has been presented for EH-WSNs which is known as adaptive hierarchical MAC. (ii) The proposed framework utilizes the cross-layer optimization for dense and low rate WSN.	(i) Future research directions may consider the work towards considering other energy harvesting environments since the current proposed scheme utilizes the solar energy harvesting environment.

packet in place of sending the usual control messages which is a general trend in geographic routing. Next, only those neighbors are selected for communication that initially received the data packet successfully and, in this way, appropriate neighbors are selected for efficient communication. Next, Hieu and Kim [121] have proposed a unique geographic routing scheme for EH-WSNs. In this routing framework, four parameters are considered for selecting the appropriate routes, namely, quality of link, residual energy, location information, and also energy harvesting rate. The ultimate aim of this geographic routing is to select reliable routes and thereby enhancing the lifetime of the network. Further, the detailed review of opportunistic routing utilizing the concept of geographic characteristics is provided in Table 6.

(4) *Routing Protocols Based on Clustering.* The clustering mechanism significantly contributes towards energy efficiency in EH-WSNs.

A detailed review of clustering-based routing is provided in Table 7.

4.9. Schemes Based on Optimization of Battery Operation. In this section, the main focus is on the issue of efficiently managing the operations of sensor nodes. The brief discussion is provided as follows.

In EH-WSNs, the currently available energy profile is considered for the transmission of data packets; these data packets are generated by the sensor nodes after periodically sensing the field and further stored in the queue. Sharma et al. [144] have presented the optimal energy management schemes for sensor nodes having energy harvesting capabilities. Further, these schemes are attributed as optimal throughput and mean delay. The proposed schemes are aimed at achieving the energy-neutral operation condition in the network. Further, Sinha and Chandrakasan [145] have proposed a scheme for enhancing the energy efficiency of nodes which is actually a power management scheme based on the microoperating system. Next, Chetto and Ghor [146] have analyzed the energy harvesting system having dynamic power management capabilities for selecting the appropriate scheduler on a uniprocessor platform with applicative conditions.

4.10. Mobility-Based Schemes. The mobility-based schemes are further classified into two categories, namely, mobile relay-based and also mobile sink-based schemes. A brief discussion about these schemes is provided below.

The mobility-enabled WSNs are suffering from higher latency factors in specific activities towards the collection of data. The mobile base stations are generally moving at a slower speed for collecting the data which further results in increasing the latency. This issue severely degrades the performance of mobility-enabled WSNs. Researchers explore the issue and find that energy efficiency can be achieved by resolving this issue. Xing et al. [147] have proposed a scheme and tried to address this issue with efficiency. The proposed scheme makes a significant contribution towards balancing

the two factors such as energy efficiency and latency factor in the mobility-enabled WSNs. In the proposed scheme, few sensor nodes buffer and aggregate the data and play the role of rendezvous points for the base station for the collection of data.

Next, another challenging issue arises due to the fact that data should be transmitted to the base station only during the lifetime of the particular application. This requirement is hard to achieve in the environment of bounded supplies of power. Moukaddem et al. [148] have proposed a scheme and tried to resolve this issue by introducing the concept of mobile relays and thereby reducing the energy consumption in data-rich WSNs.

In WSNs, the energy holes issue can be resolved by using the concept of sink mobility. The sink mobility scheme efficiently balances the energy and consequently handles the energy hole issue. In the sink mobility scheme, sensor nodes consume less energy since data collection activities occurred in a single hop by the mobile sink which is generally moving throughout the network. In the sink mobility environment, one major issue arises in data forwarding to mobile sink only during time-bound emergency circumstances, and in these situations, sensed data start losing its relevance in the bounded course of time; this sensitive issue needs to be resolved carefully. Ghosh et al. [149] have proposed an efficient scheme in which the Moore curve trajectory motion is used by the mobile sink for the collection of data. The other salient features including any forwarding and also strict sleep/wake-up policy have been followed for sensor nodes.

Next, for specific applications, the unpredictable movement behavior of the mobile sink causes performance degradation since the source sensors tried to locate the continuous moving mobile sink before actual reporting of data. The ultimate aim is to use the minimum number of hops for sending the data to a continuous moving mobile sink and the reason is obvious with the minimum number of hops leads to energy efficiency. Cheng et al. [150] have proposed the framework that addresses both the concerns such as locating the mobile sink efficiently and also reducing hops count.

4.11. Energy Balancing Schemes. The tiny sensor nodes collect the information for the specific event, and further, this information is transmitted to the sink; this is considered as the basic mechanism of WSNs. But, the transmission range issue creates hurdles in monitoring the large area in WSNs and now the need for relay nodes arises further with the help of relay nodes information reached to the sink node. Again, this step creates an imbalance in traffic share which results in an imbalance in energy consumption. The imbalance of energy also results in variation in the lifetime of sensor nodes. The reason is clear as some relay nodes are highly occupied with a portion of traffic and therefore consume a high amount of energy and soon they become dead. Dead nodes cause network partitioning and thereby collected information unable to reach the destination, and the basic objective cannot be attained. Now all these circumstances force us to think about the need for an energy balance framework in WSNs. The energy balancing framework efficiently manages the traffic load in WSNs and therefore balances the lifetime of sensor

TABLE 6: Review of various opportunistic routing schemes considering the geographic characteristics.

Year	Author and reference details	Proposed opportunistic routing framework	Metric used for evaluating performance	Bullet points	Future research directions
2010	Eu et al. [122]	EHOR	Fairness, hop count, efficiency, data delivery ratio, goodput, throughput, and source sending rate	(i) An opportunistic routing framework is proposed with consideration of energy constraints for multihop EH-WSNs.	(i) As future work, the proposed framework can be used for a 2D topology. (ii) Next, future work includes the use of network coding for enhancement of performance.
2012	Eu and Tan [123]	AOR	Throughput and fairness	(i) An adaptive opportunistic routing framework is proposed for multihop EH-WSNs. (ii) The proposed framework provides a higher throughput. (iii) The proposed framework utilized the regioning scheme and also capable enough to change as per conditions of network and energy profiles.	(i) Future research directions may consider the work towards addressing factors that are not addressed in this framework. (ii) The cost of multihop transmission is affected by the duty cycle of relay nodes and it results in the selection of inappropriate routes.
2013	Beheshtiha et al. [124]	OR-AhaD	Hop count, data delivery ratio, goodput, and efficiency	(i) An opportunistic routing framework is presented with a duty cycle approach having awareness of adaptive harvesting mechanism. (ii) The proposed framework utilized the geographical zoning approach for prioritizing the candidates set. (iii) The model is presented for managing the energy, and in this model, the duty cycle is adaptively adjusted based on the estimation of harvesting rate in the future.	(i) Future research directions may consider the work towards consideration of the effect of prediction accuracy in the performance of the routing framework. (ii) Next, future research directions may consider the work for the requirement of the unified evaluation framework for comparing the existing solutions. (iii) Further, future research directions may consider the work towards test-bedding the existing routing frameworks for exploring the implementation issues.
2017	Shafieirad et al. [125]	Max-SNR	Data delivery ratio and transmitted messages per node	(i) A novel opportunistic routing framework is presented for multihop large-scale EH-WSNs with energy awareness. (ii) The proposed scheme considered the three factors while selecting the next forwarder such as energy profile, distance, and also the amount of data.	(i) Future research directions may consider the work towards addressing factors that are not addressed in this framework. (ii) The proposed scheme may result in packet loss as well as poor delay in the case of heterogeneous and dynamic duty cycle and consequently selecting the sleeping relay nodes for packet transmission. (iii) The duty cycle cannot be adjusted accurately and this results in the limited performance of EH-WSNs.
2018	Zhang et al. [126]	OPEH	Delivery ratio and delay	(i) A novel opportunistic packet forwarding framework is presented with consideration of heterogeneous and dynamic duty cycle. (ii) The echo state network is utilized for adjusting the duty cycle.	(i) Future research directions may consider the work towards enhancing the efficiency of the echo state network since it is utilized in the current work for adjusting the duty cycle.
2019	Cheng et al. [127]	ORDTP	Packet redundancy ratio, delay, and delivery ratio	(i) An opportunistic routing framework is presented with	(i) Further, future research directions may consider the work

TABLE 6: Continued.

Year	Author and reference details	Proposed opportunistic routing framework	Metric used for evaluating performance	Bullet points	Future research directions
				consideration of dynamic transmission power for EH-WSNs. (ii) The salient features of the proposed framework include collecting the information about neighbor nodes and estimation of the transmission cost accurately. (iii) In the proposed framework, the priorities, members, and size are dynamically updated.	towards test-bedding the existing routing framework for exploring the performance in actual deployment with implementation issues.
2020	Rathore et al. [128]	OOR	Delay, packet delivery ratio, and throughput	(i) An optimal opportunistic routing framework is presented with consideration of a dynamic duty cycle based on the modified echo state network for EH-WSNs. (ii) In the proposed framework, the whale optimization algorithm is used for enhancing the prediction efficiency of the echo state network.	(i) Further, future research directions may consider the work towards test-bedding the existing routing framework for exploring the performance in actual deployment with implementation issues.
2020	Singh and Pattanayak [129]	MEHOR	Efficiency, throughput, goodput, source sending rate, data delivery ratio, and hop counts	(i) An opportunistic routing framework is presented with consideration of cross-layer design. (ii) The proposed framework utilized the Markovian model for cross-layer design.	(i) Further, future research directions may consider the work towards key challenges in the proposed framework such as reducing the duplicate packets.

nodes. The aim is to improve the lifetime of WSNs and to try to maintain the ideal environment in which all sensor nodes share the same lifetime with no variation. But in multihop WSNs, this condition is not feasible to maintain since the traffic density is increased near the sink. Therefore, in multihop WSNs, the objective is to balance the energy consumption.

A detailed review of energy balancing schemes is provided in Table 8.

5. Challenges in EH-WSNs for Formulating Optimization Problems along with Solutions

EH-WSNs are having various challenging issues which are further formulated as optimization problems. These multiobjective optimization problems can be solved by utilizing various efficient optimization algorithms that are currently available. A detailed classification of various existing challenges for green WSNs is illustrated in Figure 11.

Next, with the help of another (Figure 12), we are trying to illustrate some key challenges in EH-WSNs for formulating optimization problems along with algorithms for providing the solution to optimization problems in EH-WSNs. Therefore, Figure 12 is having two blocks; further, in the first block, some key challenges are represented, and in the second block, algorithms are depicted for providing the solution to multiobjective optimization problems. In the following sec-

tion, we are trying to address challenges as well as solutions in detail.

In [166], two important metrics such as aggregate utility and network lifetime are considered for performance evaluation. Further, to achieve enhanced network lifetime along with improved aggregate utility, a multiobjective stochastic algorithm is utilized. There exist a large number of real-life optimization problems in different fields, and the optimal solutions of these optimization problems require specially designed optimization models along with the algorithms having multiobjective computational solution capabilities with stochastic nature.

Further, in WSNs, the sensor node is having limited capabilities in processing the particular event and therefore a single node would require high processing energy to solve the particular problem and the only solution in these circumstances is the distributed approach. In the distributed framework, the part of the solution concerning the particular node is required to be sent to the respective nodes. The overall communication overhead in the distributed approach is less as compared to a centralized approach since in the centralized approach, transmission mechanism occurs from the sensor node (solving) to all the other nodes as compared to the distributed approach in which the transmission mechanism occurs to a subset of nodes [167]. Further, in [168], for determining the trade-off between enhanced network lifetime and QoS, a multiobjective routing framework is

TABLE 7: A detailed review of clustering-based routing.

Year	Author and reference details	Metric used for evaluating performance	Bullet points	Future research directions
2012	Meng et al. [130]	Number of nodes available and throughput	<p>(i) A new clustering routing protocol is presented for EH-WSNs which is known as an adaptive energy harvesting-aware clustering routing protocol.</p> <p>(ii) In the proposed framework, energy state of the node is considered for selecting the cluster head.</p> <p>(iii) The parameters in the proposed framework can be adjusted as per the deployed environment.</p>	(i) Future research directions may consider the work towards some more advanced energy-efficient schemes with more metrics for cluster head elections.
2013	Xiao et al. [131]	Throughput, number of dead nodes, and data failure rate	<p>(i) A new function has been proposed which is known as the energy potential function for assessing the capabilities of sensor nodes in terms of harvested energy.</p> <p>(ii) Next, for EH-WSNs, a new protocol known as energy potential LEACH has been presented which is the extended version of the LEACH.</p>	(i) Future research directions may consider the work towards applying the proposed framework in the practical environment with consideration of two constraints related to sensor nodes such as the capacity of the battery and limited computing capabilities.
	Zhang et al. [132]	Number of rounds until the first node dies	<p>(i) A new framework has been proposed for enhancing the lifespan of the network.</p> <p>(ii) In the proposed framework, the relay nodes for cluster heads are actually the energy harvesting sensor nodes.</p>	<p>(i) Future research directions may consider the work towards proposing a new distributed EH clustering scheme.</p> <p>(ii) The next work may be related to exploring energy harvesting nodes with different configurations.</p> <p>(iii) The next work may be related to using the testbed for evaluating the proposed framework.</p>
2014	Mostafa and Hassan [133]	Number of alive nodes	<p>(i) A new clustering algorithm has been presented for EH-WSNs in which three factors are considered primarily such as sensor node centrality, amount of energy harvested, and the total neighbors.</p> <p>(ii) Next, fuzzy petri nets are used in the proposed algorithm for selecting the cluster heads.</p>	(i) Future research directions may consider the work towards using type-2 fuzzy petri nets and other advanced versions such as extended TOPSIS for selecting the cluster heads.
2015	Peng et al. [134]	Accumulated cluster failure time and total amount of information bits	<p>(i) A new framework has been proposed for clustering in EH-WSNs and is known as the distributive energy-neutral clustering protocol.</p> <p>(ii) The proposed framework utilizes the novel cluster head group mechanism.</p> <p>(iii) Next, for efficiently handling the high traffic load, a cluster is allowed to use multiple cluster heads.</p>	(i) Future research directions may consider the work towards using hybrid advanced metaheuristic algorithms for finding the solution to the optimization problem in terms of the optimal number of clusters.
	Yukun et al. [135]	Total number of cluster heads, alive nodes, success ratio of data transmission, and residual energy	<p>(i) A new clustering routing framework has been presented for solar energy-harvested WSNs.</p> <p>(ii) The proposed framework utilized the energy threshold factor for reviving the sensor nodes.</p>	(i) Future research directions may consider the work towards using other energy harvesting environments since the proposed framework dedicated to solar energy harvesting.
	Li and Liu [136]	Normalized average throughput, awake nodes, and residual energy	<p>(i) A new clustering routing framework has been presented for EH-WSNs.</p> <p>(ii) The proposed framework utilized discrete particle swarm optimization.</p>	<p>(i) Future research directions may consider the work towards optimization of the sensor nodes number in each cluster.</p> <p>(ii) Next, the future work may consider two</p>

TABLE 7: Continued.

Year	Author and reference details	Metric used for evaluating performance	Bullet points	Future research directions
			(iii) Next, in the proposed framework, the modified discrete particle swarm optimization algorithm has been utilized for determining the optimal topology.	performance metrics, namely, throughput and alive nodes for comparing the proposed framework with the distributed framework.
2016	Li and Liu [137]	Normalized average throughput, awake nodes, and residual energy	(i) A new distributed clustering routing framework is presented for EH-WSNs. (ii) In the proposed framework, the cluster head electing mechanism is based on the current residual energy profile of the sensor nodes and the amount of harvested energy. (iii) Also, the proposed framework utilized the model for predicting solar energy based on a neural network.	(i) Future research directions may consider the work towards dynamic tuning of various coefficients that are used in the framework for overall improving the performance. (ii) The next future work may consider other different prediction models for solar energy for improved accuracy.
2017	Bozorgi et al. [138]	Alive nodes and average energy of alive nodes	(i) A new hybrid framework has been proposed consisting of both static and dynamic clustering mechanisms. (ii) The distributed-centralized approach with multihop routing has been used in the proposed framework. (iii) The proposed framework considers the three primary factors for the clustering mechanism such as the current level of energy, the number of neighbors, and the amount of harvested energy.	(i) Future research directions may consider the work towards some more advanced energy-efficient schemes with more metrics for cluster head elections in the clustering mechanism.
2019	Afsar and Younis [139]	Live nodes, throughput, consumed energy, and maximum hop count	(i) A new cross-layer design framework has been presented with capabilities such as energy scavenging and transfer for EH-WSNs. (ii) The proposed framework adopted a distributed two-tier routing topology. (iii) The proposed framework divided the network into virtual tracks further the width is based on the density of node and distance to the base station.	(i) Future research directions may consider the work towards some more advanced energy-efficient schemes with more metrics for cluster head elections in the clustering mechanism.
	Ge et al. [140]	Packets received by the base station, packets received by the cluster head, and failure node ratio	(i) A new uneven clustering framework has been presented for EH-WSNs. (ii) In the proposed framework, the energy prediction model is based on a long short-term memory. (iii) Also, the proposed framework considers the energy consumption of the node with supplement models for clustering mechanism.	(i) Future research directions may consider the work towards enhancing the rate of dynamic data transmission by automatically adjusting the network parameters and measuring the performance with the help of more simulations.
2020	Sah and Amgoth [141]	Network lifetime, alive nodes, and total commutative packets arrived at base station	(i) A new clustering framework has been presented for solar EH-WSNs. (ii) The proposed framework utilized the hierarchical clustering approach.	(i) Future research directions may consider the work towards using advanced efficient harvesting devices for EH-WSNs.
	Kumar and Chaparala [142]	Energy consumption, throughput, delay, delivery ratio, drop ratio, and network lifetime	(i) A new clustering framework has been presented utilizing a hybrid optimization approach consisting of two optimization algorithms such as bacterial foraging and fruit fly optimization algorithm for cluster head selection in the EH-WSNs.	(i) Future research directions may consider the work towards using other advanced hybrid models of optimization algorithms for selecting the cluster heads.

TABLE 7: Continued.

Year	Author and reference details	Metric used for evaluating performance	Bullet points	Future research directions
	Rathore et al. [143]	Energy consumption, delay, delivery ratio, and throughput	<p>(i) A new clustering framework is presented utilizing a hybrid optimization approach consisting of whale and grey wolf optimizer.</p> <p>(ii) In the proposed framework, the exploitation and exploration abilities are significantly improved with the help of the hybrid approach.</p>	(i) Future research directions may consider the work towards using other advanced hybrid models of optimization algorithms for the clustering mechanism.

presented. The framework focused on battery cost/budget along with maximizing the residual energy of the forwarding set. Both the abovementioned literature used the heuristic strategy. The heuristic approach is usually utilized for finding the solution to multiobjective optimization problems, and this fact is attested by currently available various kinds of literature. Further, for finding the solution in a relatively practical time, a heuristic algorithm can be used which utilized the concept of the trial-and-error approach. The heuristic method majorly provides reasonably accurate solutions.

Furthermore, the next important issue related to WSNs is regarding efficiently localizing the sensor nodes. An efficient optimization framework with multiobjective consideration is proposed in [169] for localizing the sensor nodes accurately to assess the geographical relevance of data. Next, coverage efficiency is also considered as one of the crucial issues for the performance evaluation of WSNs. Again, various literature have already been published with multiobjective formulations. They focus on enhancing the coverage with consideration of other desirable objectives also. The best solution is selected among multiple optimal solutions in the multiobjective optimization framework with consideration of a particular objective that is to be achieved [170]. Both the abovementioned literature used the evolution-based strategy. A population-based approach is used in an evolutionary multiobjective optimization framework. Here, in a particular iteration, multiple solutions take part, and a further new set of solutions evolves in the subsequent iteration. Next, derivative information is not needed in the evolution-based optimization framework, and therefore, their implementation is easy. Evolution-based optimization frameworks have a wide area of applicability and also the capability for providing solutions to complex optimization problems with multiobjective nature.

Moreover, the deployment strategies in WSNs have an immense impact on the performance since the strategies adopted in deployment have a direct relationship with the power efficiency of sensor nodes and therefore deployment issue is also considered an important constraint for WSNs. Therefore, it can be concluded that optimal deployment strategies improve the energy efficiency of WSNs and consequently lifetime of the network enhanced; also, these strategies contribute towards enhancing the overall performance of the network. In [171], metaheuristic algorithms based on

various approaches are presented for resolving the deployment issue in WSNs. The metaheuristic approach is considered better than the heuristics approach. The metaheuristic framework [172] has two primary components such as randomization and the selection of the optimal solution. The randomization components contribute to avoiding the trapping of solutions at local optima. The best solution selection step helps in ensuring that the solutions will converge to optimality.

Next, in WSNs, two conflicting objectives such as efficient connectivity and network lifetime are required to be optimized by optimization formulation with multiobjective consideration for enhancing the overall performance [173]. The ultimate aim of the framework is to provide superior connectivity to the other schemes by considering the same energy conservation profile. Since superior connectivity along with enhanced lifetime are two prominent factors that greatly affected the performance, there is an urgent requirement of optimizing all objectives simultaneously by a single solution, but traditional multiobjective formulations are not capable to satisfy this requirement. The properly designed multiobjective optimization formulation can provide plenty of alternative solutions. Further, the location of these alternative solutions is nearby or on the Pareto optimal front. Also, only in a single run, plenty of Pareto optimal solutions can be discovered by nondominated sorting algorithm II.

Besides, in WSNs, energy-efficient or energy-aware routing frameworks are needed for the effective transmission of data packets. Various network attributes such as lifetime, overhead in communication, and availability of data are influenced by energy-efficient routing frameworks. Energy-efficient or energy-aware routing frameworks are aimed at maximizing system performance. For optimization and computational intelligence, bio-inspired algorithms are extensively used currently. Bio-inspired schemes consist of dual approaches such as reactive and proactive approaches. Bio-inspired schemes are capable enough for accomplishing adaptive routing, enhanced load balancing, and also discovering network topology [174].

Also, in WSNs, the bit error rate should be minimum, and on the other hand, signal-to-noise ratio should be maximum, and for achieving these conditions, transmission power should be increased. The increment in the transmission power has a severe impact on several key attributes of

TABLE 8: A detailed review of various energy balancing schemes.

Year	Author and reference details	Metric used for evaluating the performance	Bullet points	Future research directions
2012	Yao et al. [151]	Transmission quality	<p>(i) An efficient framework has been proposed for controlling the rates of source coding adaptively by appropriately selecting the most eligible data packets for transmission.</p> <p>(ii) The proposed framework considers four primary factors for the selection of eligible packets such as power efficiency, energy cost, energy-neutral constraint, and also multimedia distortion reduction.</p>	<p>(i) The future research directions may consider extension towards utilizing other energy harvesting model since the current work utilizes the solar energy harvesting system.</p>
2013	Gregori and Payaró [152]	Mean minimum completion time, percentage of solutions	<p>(i) An optimal data transmission scheme has been proposed.</p> <p>(ii) The proposed scheme considers the three constraints such as constraints for quality of service, data causality constraints, and also constraints for energy efficiency.</p>	<p>(i) The future research directions may consider extension towards fulfilling some other constraints for the optimal data transmission scheme.</p>
	Roseveare and Natarajan [153]	Sum rate, inverse mean squared error	<p>(i) Models have been presented for different applications in the EH-WSNs with system-wide utility.</p> <p>(ii) The proposed models consider the presence of factors like uncertain resource availability with system parameters.</p>	<p>(i) The future research directions may consider extension towards developing the framework for utility maximization decentralized problems also the proposed framework will allow the problem decomposition.</p>
2014	Wang et al. [154]	Average reward rate	<p>(i) An optimal offline framework has been proposed for maximizing the weighted throughput.</p> <p>(ii) Two optimal deterministic online algorithms have also been proposed along with the randomized algorithm.</p>	<p>(i) The future research directions may consider extension towards developing the framework for semionline algorithms.</p>
	Berbakov et al. [155]	Throughput	<p>(i) An efficient semianalytical framework has been presented.</p> <p>(ii) The aim of the proposed framework is to evaluate the joint optimal transmission policy for EH-WSNs.</p> <p>(iii) In the proposed framework, throughput has improved for a given deadline.</p>	<p>(i) The future research directions may consider extension towards considering other metrics for the evaluation of the proposed framework under different energy harvesting models.</p>
2015	Michelusi and Zorzi [156]	Network utility	<p>(i) Efficient access schemes are proposed with decentralized nature.</p> <p>(ii) Also, each sensor node can individually decide whether to transmit a specific eligible packet or discarding the particular packet.</p> <p>(iii) The decision on packets is based on certain factors such as estimation of packet's utility, the current state of energy harvesting mechanism, and finally energy profile.</p> <p>(iv) The aim is to enhance the aggregate long-term utility of the packets.</p>	<p>(i) The future research directions may consider extension towards considering some other operational regimes since the current work identified two operational regimes such as the network-limited scenarios and energy-limited scenarios.</p>
	Peng and Low [157]	Distinct packet delivery ratio	<p>(i) A new framework has been proposed which is driven by query and having characteristics of energy-neutral with directed diffusion.</p> <p>(ii) The proposed framework is aimed at maintaining the energy-neutral state at the network level.</p> <p>(iii) The proposed framework results in enhanced data delivery and also the improved lifetime of the network.</p>	<p>(i) The future research directions may consider extension towards considering some more performance metrics for evaluating the performance of the proposed framework.</p>

TABLE 8: Continued.

Year	Author and reference details	Metric used for evaluating the performance	Bullet points	Future research directions
	Zordan et al. [158]	Average reward, percentage of used slots, average fidelity	<p>(i) Efficient policies have been proposed to control lossy data compression over fading channels.</p> <p>(ii) The proposed schemes consider the replenishable energy buffer along with the specific process having stochastic energy input.</p>	(i) The future research directions may consider extension towards modeling of the coupled dynamics of multiple energy harvesting sensors with multiuser scenarios.
	Zhou et al. [159]	Average mean square error	(i) A new framework has been proposed for investigating the source estimation problem in EH-WSNs.	(i) The future research directions may consider extension towards finding the more efficient solution to the stochastic constraints since the current proposed framework may increase the estimation distortion.
2016	Gong et al. [160]	Throughput	<p>(i) An efficient centralized scheme has been proposed for achieving the optimal throughput by utilizing the monotonicity which exists in the problem structure.</p> <p>(ii) Further, a distributed suboptimal scheme has been proposed in a game-theoretic approach.</p> <p>(iii) Next, the source and the relays are responsible for the proposed framework to iteratively update two primary factors such as beamforming vector and energy harvesting schedule.</p>	(i) The future research directions may consider extension towards developing relay network with multihop transmission and also having energy harvesting constraints.
	Sunny [161]	Quality of monitoring	<p>(i) An efficient joint scheduling and sensing allocation problem has been formulated which is attributed with a long-term time-averaged characteristic.</p> <p>(ii) The formulated problem considers the finite data buffers, specific energy profile, and constraints such as quality of service related to battery and certain data constraints.</p>	(i) The future research directions may consider extension towards utilizing the variable energy profile with different size data buffers also considering various other constraints.
2017	Tang et al. [162]	Throughput	(i) The energy harvesting and information processing framework has been proposed which is based on time switching as well as power splitting relaying.	(i) The future research directions may consider extension towards efficient optimization of two crucial factors such as time switching and power splitting relaying and again evaluating the proposed framework in the new environment.
2018	Aoudia et al. [163]	Dead ratio, average packet rate, and energy efficiency	<p>(i) A novel framework has been proposed for optimal energy management.</p> <p>(ii) The proposed framework considers reinforcement learning.</p> <p>(iii) The proposed framework efficiently manages the energy management adaptively with respect to the time-varying environment.</p>	(i) The future research directions may consider extension towards considering some other efficient technique since the current work considers reinforcement learning.
2019	Mabon et al. [164]	State of charge	<p>(i) An efficient node architecture has been proposed with the capabilities of high-range communication with energy-autonomous characteristics.</p> <p>(ii) Also, an optimization framework has been proposed for the energy harvesting and node's storage elements.</p>	(i) The future research directions may consider extension towards considering some other energy harvesting environment since the current work considers solar energy harvesting.
2020	Clemente et al. [165]	Power conversion efficiency	<p>(i) An investigation is conducted for analyzing the energy balance of a node.</p> <p>(ii) The investigation considers the three</p>	(i) The future research directions may consider extension towards considering some other energy harvesting environment since the

TABLE 8: Continued.

Year	Author and reference details	Metric used for evaluating the performance	Bullet points	Future research directions
			specific energy harvesting technologies such as piezoelectric, photovoltaic, and radiofrequency/Wi-Fi.	current work considers the three specific energy harvesting technologies such as piezoelectric, photovoltaic, and radiofrequency/Wi-Fi.

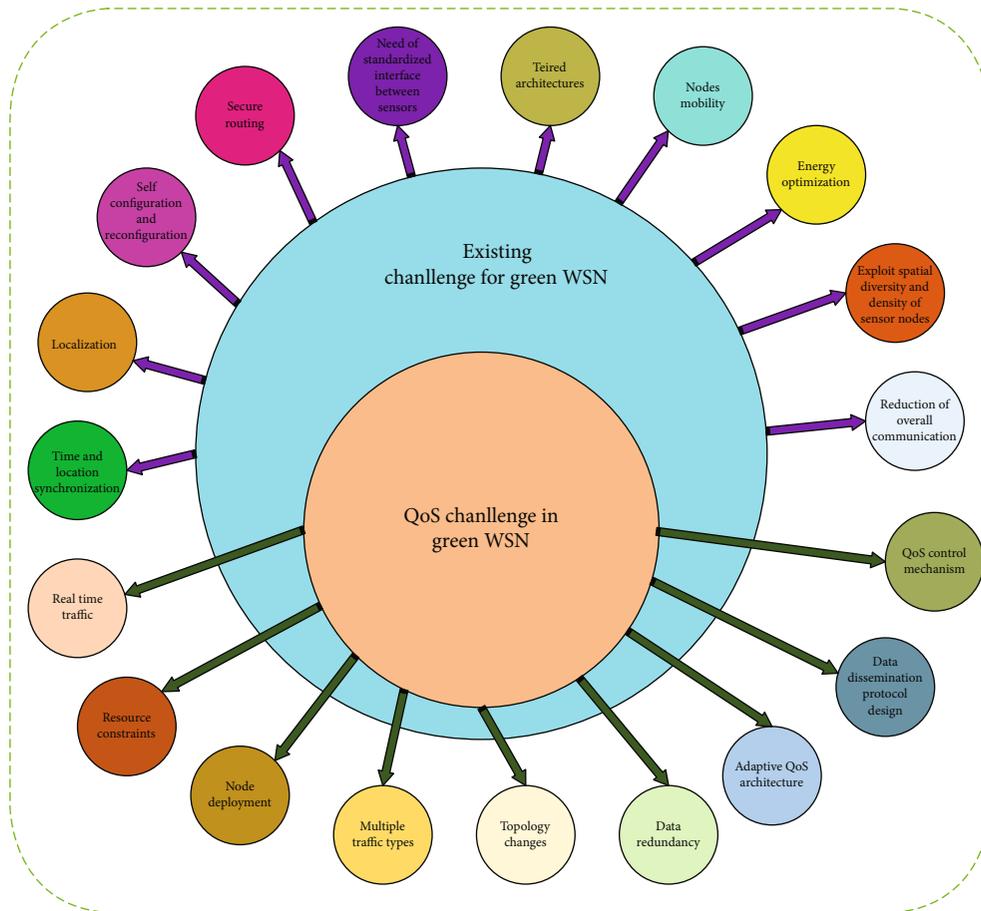


FIGURE 11: A broad classification of various existing challenges for green WSNs.

the network, namely, minimization of interference, energy efficiency, and lifetime. Hence, trade-offs among conflicting objectives can be attained by utilizing efficient multiobjective optimization frameworks. In [175], for minimizing the interferences and maximizing the throughputs, a multiobjective memetic algorithm is used to design efficient power allocation techniques along with a spectrum sensing module. Memetic algorithms are having the computational intelligence structures; further, the trial-and-error approach is used for discovering the Pareto optimal solution set.

Next, in WSNs, reliability and delay are also important parameters that need to be optimized for enhancing the system performance. In [176], an efficient routing framework is presented which utilized the multiobjective optimization approach. One of the most desired objectives is the imple-

mentation of quality of service, and this objective conflicts with other objectives such as lifetime, delay, and network cost. The routing optimization model utilized the fuzzy random variables for representing the randomness and fuzziness of the objectives and constraints. The mathematical notations are used for representing human reasoning in the Fuzzy logic approach. Fuzzy logic utilized the inference rules and linguistic variables for establishing the approximation for the truth value of a proposition.

It should be noted that high transmission power is required for increasing the transmission range of sensor nodes and consequently the degree of sensor node increases, but it has a high impact on energy efficiency and results in reduced performance in terms of energy-saving. Also, one of the attributes of WSN known as network reachability is

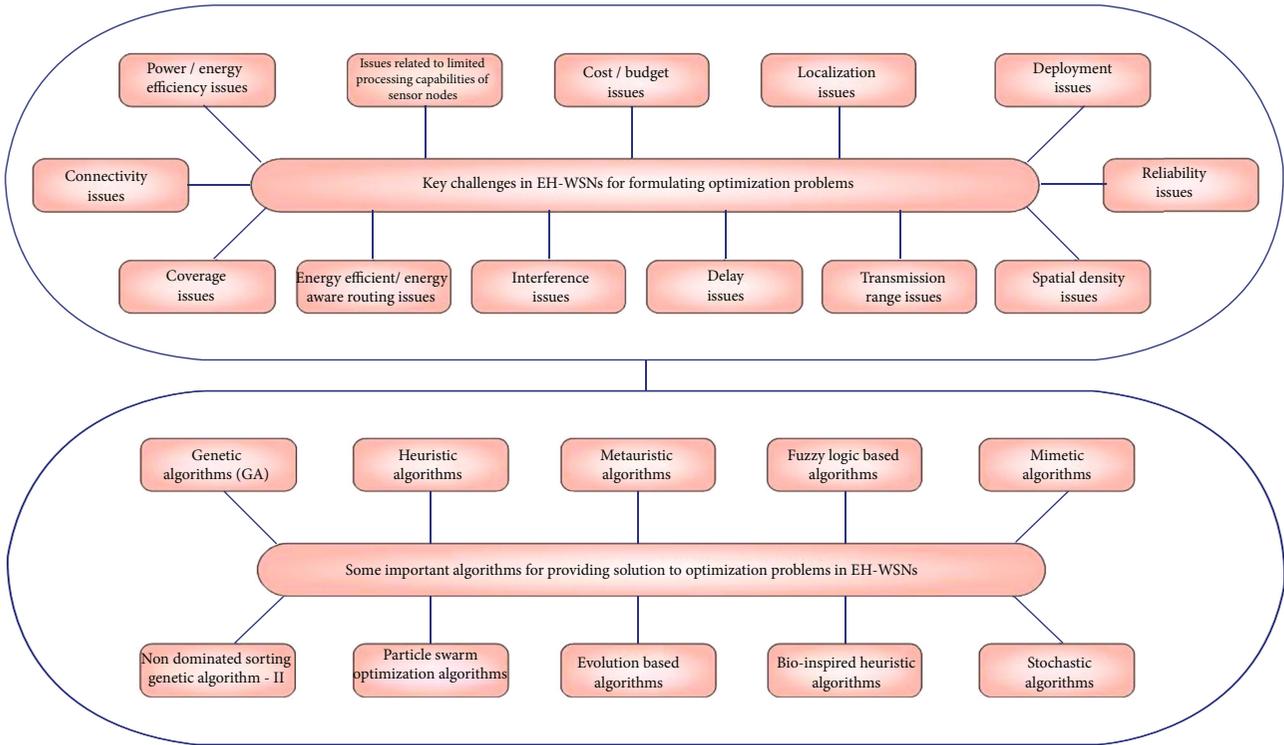


FIGURE 12: Optimization challenges and solutions in EH-WSNs.

usually low in case of poor connectivity of WSNs; on the other hand, strong connectivity in the network requires a high demand of power and consequently decreases the quality of service in WSNs. An extensive investigation is needed to analyze the optimal transmission power requirement of a sensor node. Further, for obtaining the energy-efficient clustering-based routing framework, an optimization formulation with multiobjective consideration is presented in [177]. The trade-offs among total packets delivered to the base station, the lifetime of the network, energy utilization, and dead nodes are achieved in the proposed framework. Particle swarm optimization is used in the framework. Particle swarm optimization is based on swarm behavior. In recent years, various optimization formulations have been solved by the particle swarm optimization algorithm, and therefore, it has attained immense recognition as compared to other optimization algorithms.

Also, in WSNs, plenty of tiny sensor nodes are deployed densely; also, the spatial distribution of sensor nodes affected the overall performance which results generally in terms of the error in the reconstruction of the physical signal. In a distributed tracking framework, the sensors' assignment to fusion centers in a dynamic fashion is presented in [178]. A framework is proposed in which the original problem is decomposed into subproblems by taking the concept of a genetic algorithm approach for finding real-time suboptimal solutions. Over the last two decades, genetic algorithm has been proved as an efficient search technique for solving various optimization problems. The genetic algorithm is inspired by Darwin's principle of natural evolution and starts with a set of randomly generated candidate solutions, denoted as population. Each individual in the population

corresponds to a candidate solution to the problem, and it is represented by a genetic code.

6. Trendwise Technical Analysis of Energy Harvesting Technologies Development with Future Aspects

The development trends for various energy harvesting techniques can be majorly divided into four eras yearwise as illustrated in Figure 13. Development trends in the summarized form with the scientific progress for different energy harvesting technologies have been demonstrated in this figure.

The first era covers the development activities in a duration of ten years, i.e., from 2000-2010. The key attributes of this era in terms of significant development for energy harvesting technologies are the development of energy harvesting devices with enhanced fabrication technologies and further inclination of trends towards developing the hybrid model for energy harvesting systems.

The second era covers the development activities in the duration of five years, i.e., from 2010-2015. The significant key advancement towards energy harvesting technique can be highlighted as development towards triboelectric nanogenerators technology, development of multiple system architectures for energy harvesting devices and also the development of hybrid energy harvesting system model, and further inclination of trends towards integrating the Industry 4.0 with energy harvesting technologies.

The third era covers the development activities in the duration of five years, i.e., from 2015-2020. The important key attention-seeking developments for energy harvesting

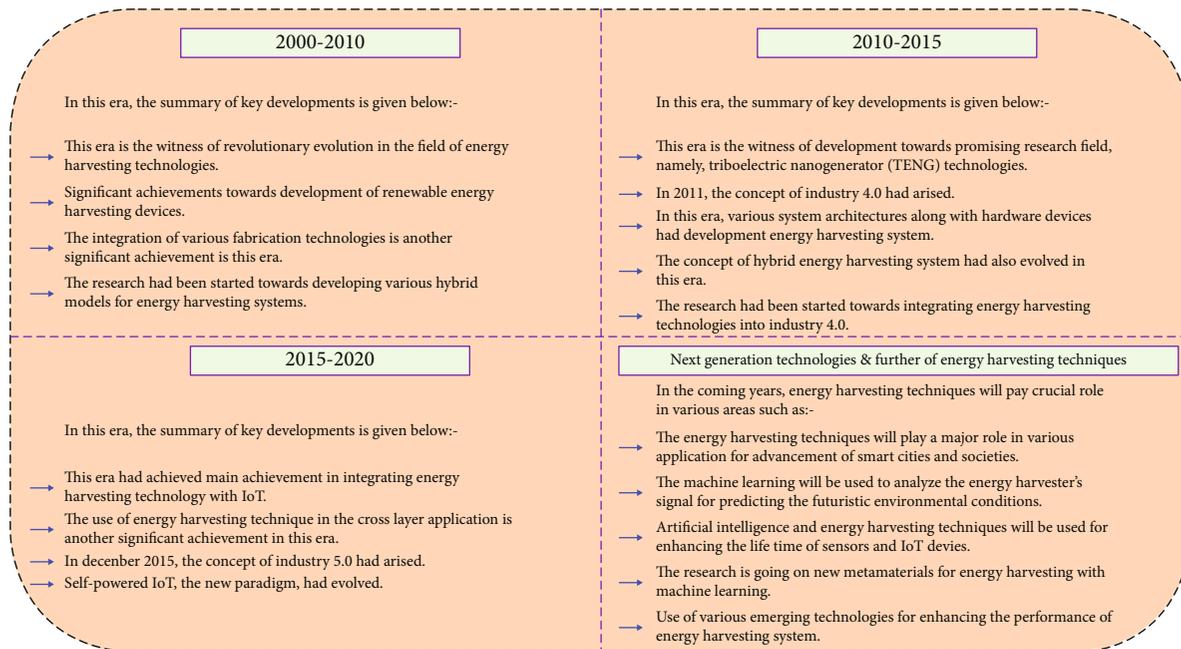


FIGURE 13: Trendwise technical analysis of energy harvesting technique development with future aspects.

technique can be listed as the integration of energy harvesting technology with IoT; next, significant development is the use of energy harvesting technique with the cross-layer application, with the evolution of Industry 5.0 in December 2015 and further inclination of trends towards developing self-powered IoT.

Furthermore, the trends have started towards exploring the use of energy harvesting technologies for uplifting the current scenario of smart cities and societies as well and in the future; this trend will be further boosted with the acceleration towards the development of the technologies for small-scale self-powered devices with the system-level implementation. Next, machine learning will be used for analyzing the signal of the energy harvester for predicting the futuristic environmental conditions. The research is going on exploring new metamaterials for energy harvesting with machine learning. Further, research is going on exploring new emerging technologies for enhancing the performance of the energy harvesting system.

7. Conclusion

In this systematic survey, we have conducted a deep study for the energy optimization issue of EH-WSNs. The ultimate aim is to enhance the life span of sensor nodes. In this high-level systematic and taxonomical survey, we have organized the energy optimization strategies for EH-WSNs into eleven main classes such as schemes based on optimization of radio, schemes based on optimization of the energy harvesting process, schemes based on reduction of data in the system, schemes based on sleep/wake-up policies, schemes based on load balancing, schemes based on optimization of power needed by the hardware devices in the system, optimization of communication mechanisms, schemes based on optimization of battery operations, mobility-based schemes, and

finally energy balancing schemes. This systematic and taxonomy survey also provides a progressive detailed overview and classification of various optimization challenges for the EH-WSNs that require attention from the researcher followed by a survey of corresponding solutions for corresponding optimization issues. Further, this systematic and taxonomical survey also provides a deep analysis of various emerging energy harvesting technologies in the last twenty years of the era. From the study, it can be concluded that energy harvesting technology can be used as an alternative source of energy for sensor nodes, but environmental heterogeneity compels us to think about strategies for effective utilization of harvested energy and energy optimization strategies play a major role in achieving this objective. There is a scope of enhancing the efficiency of the energy harvesting system, and therefore, a lot of research is still going on optimizing the energy harvesting mechanism. Although optimization of the energy harvesting mechanism possesses several challenging issues that need to be handled effectively, further, it should be worth mentioning that we should explore the possibility of new sources of energy for energizing the tiny sensor nodes. Besides, a hybrid approach can be considered for handling the energy scarcity issue of tiny sensor nodes that comprising all three pillars of energy in WSN, namely, harvested energy from the environment, batteries, and finally wireless energy transfer mechanism, but again this approach is an open research area and sincere efforts are needed to counter several challenges and, in this way, a sustained WSN may be realized.

Conflicts of Interest

The authors declare that there is no conflict of interests regarding the publication of this paper.

Acknowledgments

The research is carried out at the Deenbandhu Chhotu Ram University of Science and Technology, India, and is fully supported by the Nottingham Trent University, UK.

References

- [1] L. Farhan, R. Kharel, O. Kaiwartya, M. Quiroz-Castellanos, A. Alissa, and M. Abdulsalam, "A concise review on Internet of Things (IoT)-problems, challenges and opportunities," in *2018 11th International Symposium on Communication Systems, Networks & Digital Signal Processing (CSNDSP)*, pp. 1–6, Budapest, Hungary, 2018.
- [2] A. Khatri, S. Kumar, O. Kaiwartya, N. Aslam, N. Meena, and A. H. Abdullah, "Towards green computing in wireless sensor networks: controlled mobility-aided balanced tree approach," *International Journal of Communication Systems*, vol. 31, no. 7, article e3463, 2018.
- [3] M. Prasad, Y. T. Liu, D. L. Li, C. T. Lin, R. R. Shah, and O. P. Kaiwartya, "A new mechanism for data visualization with TSK-type preprocessed collaborative fuzzy rule based system," *Journal of Artificial Intelligence and Soft Computing Research*, vol. 7, no. 1, pp. 33–46, 2017.
- [4] F. Ullah, A. H. Abdullah, O. Kaiwartya, S. Kumar, and M. M. Arshad, "Medium access control (MAC) for wireless body area network (WBAN): superframe structure, multiple access technique, taxonomy, and challenges," *Human-Centric Computing and Information Sciences*, vol. 7, no. 1, pp. 1–39, 2017.
- [5] O. Kaiwartya, S. Kumar, and R. Kasana, "Traffic light based time stable geocast (T-TSG) routing for urban VANETs," in *Sixth International Conference on Contemporary Computing (IC3)*, pp. 113–117, Noida, India, 2013, August.
- [6] K. Kumar, S. Kumar, O. Kaiwartya, Y. Cao, J. Lloret, and N. Aslam, "Cross-layer energy optimization for IoT environments: technical advances and opportunities," *Energies*, vol. 10, no. 12, p. 2073, 2017.
- [7] Y. Cao, T. Jiang, O. Kaiwartya, H. Sun, H. Zhou, and R. Wang, "Toward pre-empted EV charging recommendation through V2V-based reservation system," *IEEE Transactions on Systems, Man, and Cybernetics: Systems*, vol. 51, pp. 3026–3039, 2021.
- [8] A. M. Khasawneh, O. Kaiwartya, L. M. Abualigah, and J. Lloret, "Green computing in underwater wireless sensor networks pressure centric energy modeling," *IEEE Systems Journal*, vol. 14, no. 4, pp. 4735–4745, 2020.
- [9] M. J. Usman, A. S. Ismail, G. Abdul-Salaam et al., "Energy-efficient nature-inspired techniques in cloud computing data-centers," *Telecommunication Systems*, vol. 71, no. 2, pp. 275–302, 2019.
- [10] A. Jaiswal, S. Kumar, O. Kaiwartya, M. Prasad, N. Kumar, and H. Song, "Green computing in IoT: time slotted simultaneous wireless information and power transfer," *Computer Communications*, vol. 168, pp. 155–169, 2021.
- [11] O. Kaiwartya and S. Kumar, "Cache agent-based geocasting in VANETs," *International Journal of Information and Communication Technology*, vol. 7, no. 6, pp. 562–584, 2015.
- [12] S. Kumar, O. Kaiwartya, and A. H. Abdullah, "Green computing for wireless sensor networks: optimization and Huffman coding approach," *Peer-to-Peer Networking and Applications*, vol. 10, no. 3, pp. 592–609, 2017.
- [13] S. Kumar, O. Kaiwartya, M. Rathee, N. Kumar, and J. Lloret, "Toward energy-oriented optimization for green communication in sensor enabled IoT environments," *IEEE Systems Journal*, vol. 14, no. 4, pp. 4663–4673, 2020.
- [14] A. Khatri, S. Kumar, O. Kaiwartya, and A. H. Abdullah, "Optimizing energy consumption and inequality in wireless sensor networks using NSGA-II," in *Proceedings of the ICCCS*, vol. 10, Boca Raton, FL, USA, 2016.
- [15] F. Ullah, A. H. Abdullah, O. Kaiwartya, J. Lloret, and M. M. Arshad, "EETP-MAC: energy efficient traffic prioritization for medium access control in wireless body area networks," *Telecommunication Systems*, vol. 75, no. 2, pp. 181–203, 2020.
- [16] L. Farhan, O. Kaiwartya, L. Alzubaidi, W. Gheth, E. Dimla, and R. Kharel, "Toward interference aware IoT framework: energy and geo-location-based-modeling," *IEEE Access*, vol. 7, pp. 56617–56630, 2019.
- [17] K. S. Adu-Manu, N. Adam, C. Tapparelo, H. Ayatollahi, and W. Heinzelman, "Energy-harvesting wireless sensor networks (EH-WSNs)," *ACM Transactions on Sensor Networks*, vol. 14, no. 2, pp. 1–50, 2018.
- [18] F. Engmann, F. A. Katsriku, J. D. Abdulai, K. S. Adu-Manu, and F. K. Banaseka, "Prolonging the lifetime of wireless sensor networks: a review of current techniques," *Wireless Communications and Mobile Computing*, vol. 2018, Article ID 8035065, 23 pages, 2018.
- [19] H. H. R. Sherazi, L. A. Grieco, and G. Boggia, "A comprehensive review on energy harvesting MAC protocols in WSNs: challenges and tradeoffs," *Ad Hoc Networks*, vol. 71, pp. 117–134, 2018.
- [20] D. K. Sah and T. Amgoth, "Renewable energy harvesting schemes in wireless sensor networks: a survey," *Information Fusion*, vol. 63, pp. 223–247, 2020.
- [21] K. Fan, M. Cai, F. Wang et al., "A string-suspended and driven rotor for efficient ultra-low frequency mechanical energy harvesting," *Energy Conversion and Management*, vol. 198, p. 111820, 2019.
- [22] B. Maamer, A. Boughamoura, A. M. F. El-Bab, L. A. Francis, and F. Tounsi, "A review on design improvements and techniques for mechanical energy harvesting using piezoelectric and electromagnetic schemes," *Energy Conversion and Management*, vol. 199, article 111973, 2019.
- [23] T. Kim, Y. Ko, C. Yoo, B. Choi, S. Han, and N. Kim, "Design optimisation of wide-band piezoelectric energy harvesters for self-powered devices," *Energy Conversion and Management*, vol. 225, article 113443, 2020.
- [24] H. Li, D. Liu, J. Wang, X. Shang, and M. R. Hajj, "Broadband bimorph piezoelectric energy harvesting by exploiting bending-torsion of L-shaped structure," *Energy Conversion and Management*, vol. 206, article 112503, 2020.
- [25] X. Guo, Y. Zhang, K. Fan, C. Lee, and F. Wang, "A comprehensive study of non-linear air damping and "pull-in" effects on the electrostatic energy harvesters," *Energy Conversion and Management*, vol. 203, article 112264, 2020.
- [26] M. Lallart and G. Lombardi, "Synchronized switch harvesting on electromagnetic system: a nonlinear technique for hybrid energy harvesting based on active inductance," *Energy Conversion and Management*, vol. 203, p. 112135, 2020.
- [27] F. U. Khan and S. Ahmad, "Flow type electromagnetic based energy harvester for pipeline health monitoring system," *Energy Conversion and Management*, vol. 200, article 112089, 2019.

- [28] B. A. Bhayo, H. H. Al-Kayiem, S. I. Gilani, and F. B. Ismail, "Power management optimization of hybrid solar photovoltaic-battery integrated with pumped-hydro-storage system for standalone electricity generation," *Energy Conversion and Management*, vol. 215, article 112942, 2020.
- [29] M. Thielen, L. Sigrist, M. Magno, C. Hierold, and L. Benini, "Human body heat for powering wearable devices: from thermal energy to application," *Energy Conversion and Management*, vol. 131, pp. 44–54, 2017.
- [30] Y. Wu, H. Zhang, and L. Zuo, "Thermoelectric energy harvesting for the gas turbine sensing and monitoring system," *Energy Conversion and Management*, vol. 157, pp. 215–223, 2018.
- [31] S. Pandya, G. Velarde, L. Zhang et al., "New approach to waste-heat energy harvesting: pyroelectric energy conversion," *NPG Asia Materials*, vol. 11, no. 1, pp. 1–5, 2019.
- [32] R. Heer, J. Wissenwasser, M. Milnera, L. Farmer, C. Höpfner, and M. Vellekoop, "Wireless powered electronic sensors for biological applications," in *2010 Annual International Conference of the IEEE Engineering in Medicine and Biology*, pp. 700–703, Buenos Aires, Argentina, 2010, September.
- [33] L. C. Zhao, H. X. Zou, G. Yan et al., "Magnetic coupling and flexensional amplification mechanisms for high-robustness ambient wind energy harvesting," *Energy Conversion and Management*, vol. 201, p. 112166, 2019.
- [34] B. J. Hansen, Y. Liu, R. Yang, and Z. L. Wang, "Hybrid nanogenerator for concurrently harvesting biomechanical and biochemical energy," *ACS Nano*, vol. 4, no. 7, pp. 3647–3652, 2010.
- [35] A. Phipps, F. Liu, L. Cattafesta, M. Sheplak, and T. Nishida, "Demonstration of a wireless, self-powered, electroacoustic liner system," *The Journal of the Acoustical Society of America*, vol. 125, no. 2, pp. 873–881, 2009.
- [36] T. He, Q. Shi, H. Wang et al., "Beyond energy harvesting - multi-functional triboelectric nanosensors on a textile," *Nano Energy*, vol. 57, pp. 338–352, 2019.
- [37] S. Sripadmanabhan Indira, C. Aravind Vaithilingam, K. S. P. Oruganti, F. Mohd, and S. Rahman, "Nanogenerators as a sustainable power source: state of art, applications, and challenges," *Nanomaterials*, vol. 9, no. 5, p. 773, 2019.
- [38] G. W. Taylor, J. R. Burns, S. A. Kammann, W. B. Powers, and T. R. Welsh, "The energy harvesting eel: a small subsurface ocean/river power generator," *IEEE Journal of Oceanic Engineering*, vol. 26, no. 4, pp. 539–547, 2001.
- [39] O. Farrok, K. Ahmed, A. D. Tahlil, M. M. Farah, M. R. Kiran, and M. Islam, "Electrical power generation from the oceanic wave for sustainable advancement in renewable energy technologies," *Sustainability*, vol. 12, no. 6, p. 2178, 2020.
- [40] S. Lin, F. Miao, J. Zhang et al., "ATPC," *ACM transactions on sensor networks*, vol. 12, no. 1, pp. 1–31, 2016.
- [41] S. Cui, A. J. Goldsmith, and A. Bahai, "Energy-efficiency of MIMO and cooperative MIMO techniques in sensor networks," *IEEE Journal on Selected Areas in Communications*, vol. 22, no. 6, pp. 1089–1098, 2004.
- [42] S. K. Jayaweera, "Virtual MIMO-based cooperative communication for energy-constrained wireless sensor networks," *IEEE Transactions on Wireless Communications*, vol. 5, no. 5, pp. 984–989, 2006.
- [43] S. Cui, A. J. Goldsmith, and A. Bahai, "Energy-constrained modulation optimization," *IEEE Transactions on Wireless Communications*, vol. 4, no. 5, pp. 2349–2360, 2005.
- [44] F. M. Costa and H. Ochiai, "A comparison of modulations for energy optimization in wireless sensor network links," in *2010 IEEE Global Telecommunications Conference GLOBE-COM 2010*, pp. 1–5, Miami, FL, USA, 2010, December.
- [45] B. Buchli, F. Sutton, J. Beutel, and L. Thiele, "Dynamic power management for long-term energy neutral operation of solar energy harvesting systems," in *Proceedings of the 12th ACM Conference on Embedded Network Sensor Systems*, pp. 31–45, Memphis Tennessee, 2014, November.
- [46] S. Reis, M. P. Silva, N. Castro et al., "Electronic optimization for an energy harvesting system based on magnetoelectric Metglas/poly (vinylidene fluoride)/Metglas composites," *Smart Materials and Structures*, vol. 25, no. 8, article 085028, 2016.
- [47] W. C. Tai and L. Zuo, "On optimization of energy harvesting from base-excited vibration," *Journal of Sound and Vibration*, vol. 411, pp. 47–59, 2017.
- [48] W. Cai and R. L. Harne, "Electrical power management and optimization with nonlinear energy harvesting structures," *Journal of Intelligent Material Systems and Structures*, vol. 30, no. 2, pp. 213–227, 2019.
- [49] H. Fouad, "Performance optimization of energy harvesting solutions for 0.18um CMOS circuits in embedded electronics design," *Cogent Engineering*, vol. 7, no. 1, article 1772947, 2020.
- [50] R. Rajagopalan and P. K. Varshney, "Data-aggregation techniques in sensor networks: a survey," *IEEE Communications Surveys & Tutorials*, vol. 8, no. 4, pp. 48–63, 2006.
- [51] E. Fasolo, M. Rossi, J. Widmer, and M. Zorzi, "In-network aggregation techniques for wireless sensor networks: a survey," *IEEE Wireless Communications*, vol. 14, no. 2, pp. 70–87, 2007.
- [52] G. Anastasi, M. Conti, M. Di Francesco, and A. Passarella, "Energy conservation in wireless sensor networks: a survey," *Ad Hoc Networks*, vol. 7, no. 3, pp. 537–568, 2009.
- [53] S. Wang, A. Vasilakos, H. Jiang et al., "Energy efficient broadcasting using network coding aware protocol in wireless ad hoc network," in *2011 IEEE International Conference on Communications (ICC)*, pp. 1–5, Kyoto, Japan, June 2011.
- [54] F. Bouabdallah, N. Bouabdallah, and R. Boutaba, "Cross-layer design for energy conservation in wireless sensor networks," in *2009 IEEE International Conference on Communications*, pp. 1–6, Dresden, Germany, June 2009.
- [55] L. You and C. Liu, "Robust cross-layer design of wireless multimedia sensor networks with correlation and uncertainty," *Journal of Networks*, vol. 6, no. 7, p. 1009, 2011.
- [56] K. Lee, H. Lee, and S. Lee, "A cross-layer scheduling technique for maximizing end-to-end video quality," in *The International Conference on Information Networking 2011 (ICOIN2011)*, pp. 410–413, Kuala Lumpur, Malaysia, January 2011.
- [57] K. T. Phan, R. Fan, H. Jiang, S. A. Vorobyov, and C. Tellambura, "Network lifetime maximization with node admission in wireless multimedia sensor networks," *IEEE Transactions on Vehicular Technology*, vol. 58, no. 7, pp. 3640–3646, 2009.
- [58] S. Misra, M. P. Kumar, and M. S. Obaidat, "Connectivity preserving localized coverage algorithm for area monitoring using wireless sensor networks," *Computer Communications*, vol. 34, no. 12, pp. 1484–1496, 2011.
- [59] X. Chu and H. Sethu, "Cooperative topology control with adaptation for improved lifetime in wireless sensor networks," *Ad Hoc Networks*, vol. 30, pp. 99–114, 2015.

- [60] A. Kansal, D. Potter, and M. B. Srivastava, "Performance aware tasking for environmentally powered sensor networks," in *Proceedings of the Joint International Conference on Measurement and Modeling of Computer Systems*, pp. 223–234, New York NY USA, June 2004.
- [61] J. Hsu, S. Zahedi, A. Kansal, M. Srivastava, and V. Raghunathan, "Adaptive duty cycling for energy harvesting systems," in *Proceedings of the 2006 International Symposium on Low Power Electronics and Design*, pp. 180–185, Tegernsee Bavaria Germany, October 2006.
- [62] C. Moser, D. Brunelli, L. Thiele, and L. Benini, "Real-time scheduling for energy harvesting sensor nodes," *Real-Time Systems*, vol. 37, no. 3, pp. 233–260, 2007.
- [63] P. Lee, M. Han, H. P. Tan, and A. Valera, "An empirical study of harvesting-aware duty cycling in environmentally-powered wireless sensor networks," in *2010 IEEE International Conference on Communication Systems*, pp. 306–310, Singapore, November 2010.
- [64] H. Li, N. Jaggi, and B. Sikdar, "Cooperative relay scheduling under partial state information in energy harvesting sensor networks," in *2010 IEEE Global Telecommunications Conference GLOBECOM 2010*, pp. 1–5, Miami, FL, USA, December 2010.
- [65] H. E. Ghor, M. Chetto, and R. H. Chehade, "A real-time scheduling framework for embedded systems with environmental energy harvesting," *Computers & Electrical Engineering*, vol. 37, no. 4, pp. 498–510, 2011.
- [66] D. Audet, L. C. De Oliveira, N. MacMillan, D. Marinakis, and K. Wu, "Scheduling recurring tasks in energy harvesting sensors," in *2011 IEEE Conference on Computer Communications Workshops (INFOCOM WKSHPs)*, pp. 277–282, Shanghai, China, April 2011.
- [67] P. Györke and B. Pataki, "Application of energy-harvesting in wireless sensor networks using predictive scheduling," in *2012 IEEE International Instrumentation and Measurement Technology Conference Proceedings*, pp. 582–587, Graz, Austria, May 2012.
- [68] H. Kooti, N. Dang, D. Mishra, and E. Bozorgzadeh, "Energy budget management for energy harvesting embedded systems," in *2012 IEEE International Conference on Embedded and Real-Time Computing Systems and Applications*, pp. 320–329, Seoul, Korea (South), August 2012.
- [69] C. Renner and V. Turau, "Adaptive energy-harvest profiling to enhance depletion-safe operation and efficient task scheduling," *Sustainable Computing: Informatics and Systems*, vol. 2, no. 1, pp. 43–56, 2012.
- [70] B. Akgün and I. Aykin, "EHPBS: Energy Harvesting Prediction Based Scheduling in Wireless Sensor Networks," in *2013 4th Annual International Conference on Energy Aware Computing Systems and Applications (ICEAC)*, pp. 1–5, Istanbul, Turkey, December 2013.
- [71] P. Sommer, B. Kusy, and R. Jurdak, "Power management for long-term sensing applications with energy harvesting," in *Proceedings of the 1st International Workshop on Energy Neutral Sensing Systems*, pp. 1–6, Rome Italy, November 2013.
- [72] Y. Li, Z. Jia, S. Xie, and F. Liu, "Dynamically reconfigurable hardware with a novel scheduling strategy in energy-harvesting sensor networks," *IEEE Sensors Journal*, vol. 13, no. 5, pp. 2032–2038, 2013.
- [73] M. Chetto, "Optimal scheduling for real-time jobs in energy harvesting computing systems," *IEEE Transactions on Emerging Topics in Computing*, vol. 2, no. 2, pp. 122–133, 2014.
- [74] A. Castagnetti, A. Pegatoquet, T. N. Le, and M. Auguin, "A joint duty-cycle and transmission power management for energy harvesting WSN," *IEEE Transactions on Industrial Informatics*, vol. 10, no. 2, pp. 928–936, 2014.
- [75] Y. Li, Z. Jia, and X. Li, "Task scheduling based on weather forecast in energy harvesting sensor systems," *IEEE Sensors Journal*, vol. 14, no. 11, pp. 3763–3765, 2014.
- [76] Y. Liu, H. Yang, Y. Wang et al., "Power system design and task scheduling for photovoltaic energy harvesting based nonvolatile sensor nodes," in *Smart Sensors and Systems*, pp. 243–277, Springer, Cham, 2015.
- [77] D. Zhang, Y. Liu, X. Sheng et al., "Deadline-aware task scheduling for solar-powered nonvolatile sensor nodes with global energy migration," in *Proceedings of the 52nd Annual Design Automation Conference*, pp. 1–6, San Francisco California, June 2015.
- [78] Q. I. Ali, "Event driven duty cycling: an efficient power management scheme for a solar-energy harvested road side unit," *IET Electrical Systems in Transportation*, vol. 6, no. 3, pp. 222–235, 2016.
- [79] A. Gomez, L. Sigrist, M. Magno, L. Benini, and L. Thiele, "Dynamic energy burst scaling for transiently powered systems," in *2016 Design, Automation & Test in Europe Conference & Exhibition (DATE)*, pp. 349–354, Dresden, Germany, March 2016.
- [80] D. Zhang, Y. Liu, J. Li et al., "Solar power prediction assisted intra-task scheduling for nonvolatile sensor nodes," *IEEE Transactions on Computer-Aided Design of Integrated Circuits and Systems*, vol. 35, no. 5, pp. 724–737, 2016.
- [81] J. Oueis, R. Stanica, and F. Valois, "Energy harvesting wireless sensor networks: from characterization to duty cycle dimensioning," in *2016 IEEE 13th International Conference on Mobile Ad Hoc and Sensor Systems (MASS)*, pp. 183–191, Brasilia, Brazil, October 2016.
- [82] W. Housseyni, O. Mosbahi, M. Khalgui, and M. Chetto, "Real-time scheduling of sporadic tasks in energy harvesting distributed reconfigurable embedded systems," in *2016 IEEE/ACS 13th International Conference of Computer Systems and Applications (AICCSA)*, pp. 1–8, Agadir, Morocco, November 2016.
- [83] A. Maeda, S. Kasahara, and Y. Takahashi, "Dynamic task scheduling for energy harvesting nodes in wireless sensor networks," in *Proceedings of the 11th International Conference on Queuing Theory and Network Applications*, pp. 1–8, Wellington New Zealand, December 2016.
- [84] C. A. Sanchez, O. Mokrenko, L. Zaccarian, and S. Lesecq, "A hybrid control law for energy-oriented tasks scheduling in wireless sensor networks," *IEEE Transactions on Control Systems Technology*, vol. 26, no. 6, pp. 1995–2007, 2017.
- [85] L. Huang, S. Bi, L. P. Qian, and Z. Xia, "Adaptive scheduling in energy harvesting sensor networks for green cities," *IEEE Transactions on Industrial Informatics*, vol. 14, no. 4, pp. 1575–1584, 2018.
- [86] A. Bengheni, F. Didi, and I. Bambrik, "EEM-EHWSN: enhanced energy management scheme in energy harvesting wireless sensor networks," *Wireless Networks*, vol. 25, no. 6, pp. 3029–3046, 2019.
- [87] P. Anagnostou, A. Gomez, P. A. Hager et al., "Torpor: a power-aware HW scheduler for energy harvesting IoT SoCs,"

- in *2018 28th International Symposium on Power and Timing Modeling, Optimization and Simulation (PATMOS)*, pp. 54–61, July 2018.
- [88] S. Galmés and S. Escobar, “Analytical model for the duty cycle in solar-based EH-WSN for environmental monitoring,” *Sensors*, vol. 18, no. 8, p. 2499, 2018.
- [89] S. Cui, “Solar energy prediction and task scheduling for wireless sensor nodes based on long short term memory,” *Journal of Physics: Conference Series*, vol. 1074, no. 1, article 012100, 2018.
- [90] P. Sommer, K. Geissdoerfer, R. Jurdak et al., “Energy- and mobility-aware scheduling for perpetual trajectory tracking,” *IEEE Transactions on Mobile Computing*, vol. 19, no. 3, pp. 566–580, 2020.
- [91] J. Zhang, S. Zheng, T. Zhang, M. Wang, and Z. Li, “Charge-aware duty cycling methods for wireless systems under energy harvesting heterogeneity,” *ACM Transactions on Sensor Networks*, vol. 16, no. 2, pp. 1–23, 2020.
- [92] H. I. Liu, W. J. He, and W. K. Seah, “LEB-MAC: load and energy balancing MAC protocol for energy harvesting powered wireless sensor networks,” in *2014 20th IEEE International Conference on Parallel and Distributed Systems (ICPADS)*, pp. 584–591, Hsinchu, Taiwan, December 2014.
- [93] B. Cai, S. L. Mao, X. H. Li, and Y. M. Ding, “Dynamic energy balanced max flow routing in energy-harvesting sensor networks,” *International Journal of Distributed Sensor Networks*, vol. 13, no. 11, 2017.
- [94] R. Wu, H. Guo, L. Tang, and B. Fan, “Autonomous load regulation based energy balanced routing in rechargeable wireless sensor networks,” *Applied Sciences*, vol. 9, no. 16, article 3251, 2019.
- [95] Y. Chai and X. J. Zeng, “Load balancing routing for wireless mesh network with energy harvesting,” *IEEE Communications Letters*, vol. 24, no. 4, pp. 926–930, 2020.
- [96] K. Nagalakshmi and N. Gomathi, “Analysis of power management techniques in multicore processors,” in *Artificial Intelligence and Evolutionary Computations in Engineering Systems*, pp. 397–418, Springer, Singapore, 2017.
- [97] K. M. Attia, M. A. El-Hosseini, and H. A. Ali, “Dynamic power management techniques in multi-core architectures: a survey study,” *Ain Shams Engineering Journal*, vol. 8, no. 3, pp. 445–456, 2017.
- [98] D. Pimentel and P. Musilek, “Power management with energy harvesting devices,” in *CCECE 2010*, pp. 1–4, Calgary, AB, Canada, May 2010.
- [99] A. Herber, A. Hanisch, T. Gnoerrlich, D. Laqua, and P. Husar, “Design of power management in energy harvesting devices,” *Biomedical Technician*, vol. 57, Supplement 1, pp. 251–254, 2012.
- [100] Y. Kim, C. W. Park, and T. J. Lee, “MAC protocol for energy-harvesting users in cognitive radio networks,” in *Proceedings of the 8th International Conference on Ubiquitous Information Management and Communication*, pp. 1–4, Siem Reap Cambodia, January 2014.
- [101] M. Y. Naderi, P. Nintanavongsa, and K. R. Chowdhury, “RF-MAC: a medium access control protocol for re-chargeable sensor networks powered by wireless energy harvesting,” *IEEE Transactions on Wireless Communications*, vol. 13, no. 7, pp. 3926–3937, 2014.
- [102] H. H. Lin, M. J. Shih, H. Y. Wei, and R. Vannithamby, “Deep-Sleep: IEEE 802.11 enhancement for energy-harvesting machine-to-machine communications,” *Wireless Networks*, vol. 21, no. 2, pp. 357–370, 2015.
- [103] X. Fafoutis and N. Dragoni, “ODMAC: an on-demand MAC protocol for energy harvesting-wireless sensor networks,” in *Proceedings of the 8th ACM Symposium on Performance Evaluation of Wireless Ad Hoc, Sensor, and Ubiquitous Networks*, pp. 49–56, Miami Florida USA, November 2011.
- [104] Z. A. Eu and H. P. Tan, “Probabilistic polling for multi-hop energy harvesting wireless sensor networks,” in *2012 IEEE International Conference on Communications (ICC)*, pp. 271–275, Ottawa, ON, Canada, June 2012.
- [105] S. C. Kim, J. H. Jeon, and H. J. Park, “QoS aware energy-efficient (QAEE) MAC protocol for energy harvesting wireless sensor networks,” in *International Conference on Hybrid Information Technology*, pp. 41–48, Berlin, Heidelberg, August 2012.
- [106] K. Nguyen, V. H. Nguyen, D. D. Le, Y. Ji, D. A. Duong, and S. Yamada, “ERI-MAC: an energy-harvested receiver-initiated MAC protocol for wireless sensor networks,” *International Journal of Distributed Sensor Networks*, vol. 10, no. 5, Article ID 514169, 2014.
- [107] J. Varghese and S. V. Rao, “Energy-efficient exponential decision MAC for energy harvesting wireless sensor networks,” in *2014 International Conference on Advances in Green Energy (ICAGE)*, pp. 239–244, Thiruvananthapuram, India, December 2014.
- [108] Z. A. Eu, H. P. Tan, and W. K. Seah, “Design and performance analysis of MAC schemes for wireless sensor networks powered by ambient energy harvesting,” *Ad Hoc Networks*, vol. 9, no. 3, pp. 300–323, 2011.
- [109] C. Fujii and W. K. Seah, “Multi-tier probabilistic polling in wireless sensor networks powered by energy harvesting,” in *2011 Seventh International Conference on Intelligent Sensors, Sensor Networks and Information Processing*, pp. 383–388, Adelaide, SA, Australia, December 2011.
- [110] T. D. Nguyen, J. Y. Khan, and D. T. Ngo, “An adaptive MAC protocol for RF energy harvesting wireless sensor networks,” in *2016 IEEE Global Communications Conference (GLOBECOM)*, pp. 1–6, Washington, DC, USA, December 2016.
- [111] A. I. Al-Sulaifanie, S. Biswas, and B. Khorshed Al-Sulaifanie, “AH-MAC: adaptive hierarchical MAC protocol for low-rate wireless sensor network applications,” *Journal of Sensors*, vol. 2017, Article ID 8105954, 15 pages, 2017.
- [112] S. Reddy and C. R. Murthy, “Dual-stage power management algorithms for energy harvesting sensors,” *IEEE Transactions on Wireless Communications*, vol. 11, no. 4, pp. 1434–1445, 2012.
- [113] K. Tutuncuoglu and A. Yener, “Optimum transmission policies for battery limited energy harvesting nodes,” *IEEE Transactions on Wireless Communications*, vol. 11, no. 3, pp. 1180–1189, 2012.
- [114] S. Tang and L. Tan, “Reward rate maximization and optimal transmission policy of EH device with temporal death in EH-WSNs,” *IEEE Transactions on Wireless Communications*, vol. 16, no. 2, pp. 1157–1167, 2016.
- [115] L. Berbakov, C. Antón-Haro, and J. Matamoros, “Optimal transmission policy for cooperative transmission with energy harvesting and battery operated sensor nodes,” *Signal Processing*, vol. 93, no. 11, pp. 3159–3170, 2013.
- [116] N. Michelusi, L. Badia, and M. Zorzi, “Optimal transmission policies for energy harvesting devices with limited state-of-

- charge knowledge,” *IEEE Transactions on Communications*, vol. 62, no. 11, pp. 3969–3982, 2014.
- [117] N. Pais, B. K. Cetin, N. Pratas, F. J. Velez, N. R. Prasad, and R. Prasad, “Cost-benefit aware routing protocol for wireless sensor networks with hybrid energy storage system,” *Journal of Green Engineering*, vol. 1, no. 2, pp. 189–208, 2011.
- [118] G. Martinez, S. Li, and C. Zhou, “Wastage-aware routing in energy-harvesting wireless sensor networks,” *IEEE Sensors Journal*, vol. 14, no. 9, pp. 2967–2974, 2014.
- [119] A. Kollias and I. Nikolaidis, “Seasonally aware routing for thermoelectric energy harvesting wireless sensor networks,” in *2015 International Conference on Smart Cities and Green ICT Systems (SMARTGREENS)*, pp. 1–11, Lisbon, Portugal, May 2015.
- [120] O. Jumira, R. Wolhuter, and S. Zeadally, “Energy-efficient beaconless geographic routing in energy harvested wireless sensor networks,” *Concurrency and Computation: Practice and Experience*, vol. 25, no. 1, pp. 58–84, 2013.
- [121] T. D. Hieu and B. S. Kim, “Stability-aware geographic routing in energy harvesting wireless sensor networks,” *Sensors*, vol. 16, no. 5, p. 696, 2016.
- [122] Z. A. Eu, H. P. Tan, and W. K. Seah, “Opportunistic routing in wireless sensor networks powered by ambient energy harvesting,” *Computer Networks*, vol. 54, no. 17, pp. 2943–2966, 2010.
- [123] Z. A. Eu and H. P. Tan, “Adaptive opportunistic routing protocol for energy harvesting wireless sensor networks,” in *2012 IEEE International Conference on Communications (ICC)*, pp. 318–322, Ottawa, ON, Canada, June 2012.
- [124] S. S. Beheshti, H. P. Tan, and M. Sabaei, *OR-AHA: An Opportunistic Routing Algorithm for Energy Harvesting WSN*, River Publishers, 2013.
- [125] H. Shafieirad, R. S. Adve, and S. Shahbazpanahi, “Max-SNR opportunistic routing for large-scale energy harvesting sensor networks,” *IEEE Transactions on Green Communications and Networking*, vol. 2, no. 2, pp. 506–516, 2018.
- [126] X. Zhang, C. Wang, and L. Tao, “An opportunistic packet forwarding for energy-harvesting wireless sensor networks with dynamic and heterogeneous duty cycle,” *IEEE Sensors Letters*, vol. 2, no. 3, pp. 1–4, 2018.
- [127] H. Cheng, C. Wang, and X. Zhang, “An opportunistic routing in energy-harvesting wireless sensor networks with dynamic transmission power,” *IEEE Access*, vol. 7, pp. 180652–180660, 2019.
- [128] R. S. Rathore, S. Sangwan, K. Adhikari, and R. Kharel, “Modified echo state network enabled dynamic duty cycle for optimal opportunistic routing in EH-WSNs,” *Electronics*, vol. 9, no. 1, p. 98, 2020.
- [129] D. Singh and B. K. Pattanayak, “Markovian model analysis for energy harvesting nodes in a modified opportunistic routing protocol,” *International Journal of Electronics*, vol. 107, no. 12, pp. 1963–1984, 2020.
- [130] J. Meng, X. Zhang, Y. Dong, and X. Lin, “Adaptive energy-harvesting aware clustering routing protocol for wireless sensor networks,” in *7th International Conference on Communications and Networking in China*, pp. 742–747, Kunming, China, August 2012.
- [131] M. Xiao, X. Zhang, and Y. Dong, “An effective routing protocol for energy harvesting wireless sensor networks,” in *2013 IEEE Wireless Communications and Networking Conference (WCNC)*, pp. 2080–2084, Shanghai, China, April 2013.
- [132] P. Zhang, G. Xiao, and H. P. Tan, “Clustering algorithms for maximizing the lifetime of wireless sensor networks with energy-harvesting sensors,” *Computer Networks*, vol. 57, no. 14, pp. 2689–2704, 2013.
- [133] A. Mostafa and K. Hassan, “Robust energy harvesting aware clustering with fuzzy petri net reasoning algorithm,” in *2014 IEEE 10th International Conference on Wireless and Mobile Computing, Networking and Communications (WiMob)*, pp. 378–383, Larnaca, Cyprus, October 2014.
- [134] S. Peng, T. Wang, and C. P. Low, “Energy neutral clustering for energy harvesting wireless sensors networks,” *Ad Hoc Networks*, vol. 28, pp. 1–16, 2015.
- [135] Y. Yukun, Y. Zhilong, and W. Guan, “Clustering routing algorithm of self-energized wireless sensor networks based on solar energy harvesting,” *The Journal of China Universities of Posts and Telecommunications*, vol. 22, no. 4, pp. 66–73, 2015.
- [136] J. Li and D. Liu, “DPSO-based clustering routing algorithm for energy harvesting wireless sensor networks,” in *2015 International Conference on Wireless Communications & Signal Processing (WCSP)*, pp. 1–5, Nanjing, China, October 2015.
- [137] J. Li and D. Liu, “An energy aware distributed clustering routing protocol for energy harvesting wireless sensor networks,” in *2016 IEEE/CIC International Conference on Communications in China (ICCC)*, pp. 1–6, Chengdu, China, July 2016.
- [138] S. M. Bozorgi, A. S. Rostami, A. A. R. Hosseinabadi, and V. E. Balas, “A new clustering protocol for energy harvesting wireless sensor networks,” *Computers & Electrical Engineering*, vol. 64, pp. 233–247, 2017.
- [139] M. M. Afsar and M. Younis, “A load-balanced cross-layer design for energy-harvesting sensor networks,” *Journal of Network and Computer Applications*, vol. 145, p. 102390, 2019.
- [140] Y. Ge, Y. Nan, and Y. Chen, “Maximizing information transmission for energy harvesting sensor networks by an uneven clustering protocol and energy management,” *KSII Transactions on Internet & Information Systems*, vol. 14, no. 4, 2020.
- [141] D. K. Sah and T. Amgothi, “A novel efficient clustering protocol for energy harvesting in wireless sensor networks,” *Wireless Networks*, vol. 26, no. 6, pp. 4723–4737, 2020.
- [142] M. M. Kumar and A. Chaparala, “A hybrid BFO-FOA-based energy efficient cluster head selection in energy harvesting wireless sensor network,” *International Journal of Communication Networks and Distributed Systems*, vol. 25, no. 2, pp. 205–222, 2020.
- [143] R. S. Rathore, S. Sangwan, S. Prakash, K. Adhikari, R. Kharel, and Y. Cao, “Hybrid WGWO: whale grey wolf optimization-based novel energy-efficient clustering for EH-WSNs,” *EUR-ASIP Journal on Wireless Communications and Networking*, vol. 2020, Article ID 101, 2020.
- [144] V. Sharma, U. Mukherji, V. Joseph, and S. Gupta, “Optimal energy management policies for energy harvesting sensor nodes,” *IEEE Transactions on Wireless Communications*, vol. 9, no. 4, pp. 1326–1336, 2010.
- [145] A. Sinha and A. Chandrakasan, “Dynamic power management in wireless sensor networks,” *IEEE Design & Test of Computers*, vol. 18, no. 2, pp. 62–74, 2001.
- [146] M. Chetto and H. El Ghor, “Scheduling and power management in energy harvesting computing systems with real-

- time constraints,” *Journal of Systems Architecture*, vol. 98, pp. 243–248, 2019.
- [147] G. Xing, M. Li, T. Wang, W. Jia, and J. Huang, “Efficient rendezvous algorithms for mobility-enabled wireless sensor networks,” *IEEE Transactions on Mobile Computing*, vol. 11, no. 1, pp. 47–60, 2012.
- [148] F. El-Moukaddem, E. Torng, and G. Xing, “Mobile relay configuration in data-intensive wireless sensor networks,” *IEEE Transactions on Mobile Computing*, vol. 12, no. 2, pp. 261–273, 2011.
- [149] N. Ghosh, R. Sett, and I. Banerjee, “An efficient trajectory based routing scheme for delay-sensitive data in wireless sensor network,” *Computers & Electrical Engineering*, vol. 64, pp. 288–304, 2017.
- [150] C. F. Cheng, S. L. Lin, C. C. Wang, and H. Li, “Trail-based routing algorithms for WSNs with uncontrolled sink mobility,” *Computer Communications*, vol. 106, pp. 57–74, 2017.
- [151] R. Yao, W. Wang, K. Sohraby, S. Jin, S. Lim, and H. Zhu, “A weight-optimized source rate optimization approach in energy harvesting wireless sensor networks,” in *2012 IEEE Global Communications Conference (GLOBECOM)*, pp. 1789–1793, Anaheim, CA, USA, December 2012.
- [152] M. Gregori and M. Payaró, “Energy-efficient transmission for wireless energy harvesting nodes,” *IEEE Transactions on Wireless Communications*, vol. 12, no. 3, pp. 1244–1254, 2013.
- [153] N. Roseveare and B. Natarajan, “An alternative perspective on utility maximization in energy-harvesting wireless sensor networks,” *IEEE Transactions on Vehicular Technology*, vol. 63, no. 1, pp. 344–356, 2013.
- [154] H. Wang, J. X. Zhang, and F. Li, “Worst-case performance guarantees of scheduling algorithms maximizing weighted throughput in energy-harvesting networks,” *Sustainable Computing: Informatics and Systems*, vol. 4, no. 3, pp. 172–182, 2014.
- [155] L. Berbakov, C. Antón-Haro, and J. Matamoros, “Joint optimization of transmission policies for collaborative beamforming with energy harvesting sensors,” *IEEE Transactions on Wireless Communications*, vol. 13, no. 7, pp. 3496–3509, 2014.
- [156] N. Michelusi and M. Zorzi, “Optimal adaptive random multi-access in energy harvesting wireless sensor networks,” *IEEE Transactions on Communications*, vol. 63, no. 4, pp. 1355–1372, 2015.
- [157] S. Peng and C. P. Low, “Energy neutral directed diffusion for energy harvesting wireless sensor networks,” *Computer Communications*, vol. 63, pp. 40–52, 2015.
- [158] D. Zordan, T. Melodia, and M. Rossi, “On the design of temporal compression strategies for energy harvesting sensor networks,” *IEEE Transactions on Wireless Communications*, vol. 15, no. 2, pp. 1336–1352, 2015.
- [159] H. Zhou, T. Jiang, C. Gong, and Y. Zhou, “Optimal estimation in wireless sensor networks with energy harvesting,” *IEEE Transactions on Vehicular Technology*, vol. 65, no. 11, pp. 9386–9396, 2016.
- [160] S. Gong, L. Duan, and N. Gautam, “Optimal scheduling and beamforming in relay networks with energy harvesting constraints,” *IEEE Transactions on Wireless Communications*, vol. 15, no. 2, pp. 1226–1238, 2015.
- [161] A. Sunny, “Joint scheduling and sensing allocation in energy harvesting sensor networks with fusion centers,” *IEEE Journal on Selected Areas in Communications*, vol. 34, no. 12, pp. 3577–3589, 2016.
- [162] K. Tang, R. Shi, and J. Dong, “Throughput analysis of cognitive wireless acoustic sensor networks with energy harvesting,” *Future Generation Computer Systems*, vol. 86, pp. 1218–1227, 2018.
- [163] F. A. Aoudia, M. Gautier, and O. Berder, “RLMan: an energy manager based on reinforcement learning for energy harvesting wireless sensor networks,” *IEEE Transactions on Green Communications and Networking*, vol. 2, no. 2, pp. 408–417, 2018.
- [164] M. Mabon, M. Gautier, B. Vrigneau, M. Le Gentil, and O. Berder, “The smaller the better: designing solar energy harvesting sensor nodes for long-range monitoring,” *Wireless Communications and Mobile Computing*, vol. 2019, Article ID 2878545, 11 pages, 2019.
- [165] C. S. Clemente, D. Davino, and V. P. Loschiavo, “Energy balance of a continuous structural health monitoring system based on energy harvesting,” *IOP Conference Series: Materials Science and Engineering*, vol. 949, no. 1, article 012013, 2020.
- [166] S. He, J. Chen, W. Xu, Y. Sun, P. Thulasiraman, and X. Shen, “A stochastic multiobjective optimization framework for wireless sensor networks,” *EURASIP Journal on Wireless Communications and Networking*, vol. 2010, Article ID 430615, 2010.
- [167] A. Ibrahim and A. Alfa, “Optimization techniques for design problems in selected areas in WSNs: a tutorial,” *Sensors*, vol. 17, no. 8, p. 1761, 2017.
- [168] T. Hounghadji and S. Pierre, “QoSNET: an integrated QoS network for routing protocols in large scale wireless sensor networks,” *Computer Communications*, vol. 33, no. 11, pp. 1334–1342, 2010.
- [169] D. Qiao and G. K. Pang, “Evolutionary approach on connectivity-based sensor network localization,” *Applied Soft Computing*, vol. 22, pp. 36–46, 2014.
- [170] J. Andersson, *A Survey of Multiobjective Optimization in Engineering Design*, Department of Mechanical Engineering, Linköping University, Sweden, 2000.
- [171] C. W. Tsai, P. W. Tsai, J. S. Pan, and H. C. Chao, “Metaheuristics for the deployment problem of WSN: a review,” *Microprocessors and Microsystems*, vol. 39, no. 8, pp. 1305–1317, 2015.
- [172] R. S. Rathore, S. Sangwan, S. Mazumdar et al., “W-GUN: whale optimization for energy and delay-centric green underwater networks,” *Sensors*, vol. 20, no. 5, p. 1377, 2020.
- [173] S. M. Jameii, K. Faez, and M. Dehghan, “Multiobjective optimization for topology and coverage control in wireless sensor networks,” *International Journal of Distributed Sensor Networks*, vol. 11, no. 2, Article ID 363815, 2015.
- [174] P. Krömer and P. Musilek, “Bio-inspired routing strategies for wireless sensor networks,” in *Propagation Phenomena in Real World Networks*, pp. 155–181, Springer, Cham, 2015.
- [175] H. V. Dang and W. Kinsner, “Multiobjective memetic optimization for spectrum sensing and power allocation in cognitive wireless networks,” in *2014 IEEE 27th Canadian Conference on Electrical and Computer Engineering (CCECE)*, pp. 1–6, Toronto, ON, Canada, May 2014.
- [176] J. Lu, X. Wang, L. Zhang, and X. Zhao, “Fuzzy random multi-objective optimization based routing for wireless sensor networks,” *Soft Computing*, vol. 18, no. 5, pp. 981–994, 2014.

- [177] P. Kuila and P. K. Jana, "Energy efficient clustering and routing algorithms for wireless sensor networks: particle swarm optimization approach," *Engineering Applications of Artificial Intelligence*, vol. 33, pp. 127–140, 2014.
- [178] R. Tharmarasa, T. Kirubarajan, J. Peng, and T. Lang, "Optimization-based dynamic sensor management for distributed multitarget tracking," *IEEE Transactions on Systems, Man, and Cybernetics, Part C (Applications and Reviews)*, vol. 39, no. 5, pp. 534–546, 2009.